


Double Acting Cylinders w/No Ends Standard
Vérins D.E. Standard Sans Fixations
DW. Standardzylinder Ohne Befestigungen

[Serie 500]

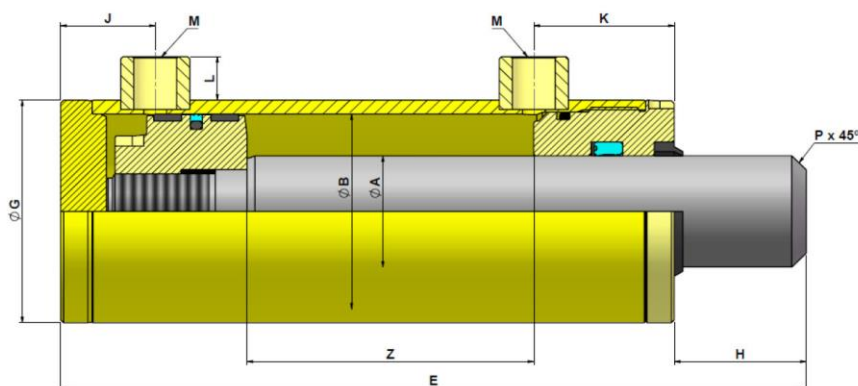

REF.	VASTAGO ROD / TIGE KOLBENST. ØA	PISTON KOLBEN ØB	CARRERA STROKE COURSE HUB Z	E	ØG	H	J	K	L	M	P	VOL (l)	JUNTAS SEALS JOINTS DICHTUNG.	PESO (kg) WEIGHT POIDS GEWICHT
52032/100	20	32	100	230	40	23	25	35	12	1/4"	3	0,08	J70N	1,6
52032/200			200	330								0,16		2,2
52032/250			250	380								0,20		2,5
52032/300			300	430								0,24		2,8
52032/400			400	530								0,32		3,4
52032/500			500	630								0,40		4,0
52540/200	25	40	200	330	50	33	29	40	16	3/8"	4	0,25	J71N	3,4
52540/250			250	380								0,31		3,8
52540/300			300	430								0,38		4,3
52540/400			400	530								0,50		5,2
52540/500			500	630								0,63		6,2
52540/600			600	730								0,75		7,1
52540/700			700	830								0,88		8,1
52540/1000			1000	1130								1,26		10,9
53050/150	30	50	150	290	60	36	31	43	16	3/8"	4	0,29	J72N	4,2
53050/200			200	340								0,39		4,8
53050/250			250	390								0,49		5,4
53050/300			300	440								0,59		6,0
53050/350			350	490								0,69		6,6
53050/400			400	540								0,79		7,3
53050/500			500	640								0,98		8,5
53050/600			600	740								1,18		9,7
53050/700			700	840								1,37		10,9
53050/900			900	1040								1,77		13,4
53050/1000			1000	1140								1,96		14,6
53060/200	30	60	200	360	70	54	31	45	16	3/8"	4	0,57	J73N	5,9
53060/300			300	460								0,85		7,3
53060/400			400	560								1,13		8,6
53060/500			500	660								1,41		10,0
53060/600			600	760								1,70		11,3
53060/700			700	860								1,98		12,7

REF.	VASTAGO ROD / TIGE KOLBENST. ØA	PISTON KOLBEN ØB	CARRERA STROKE COURSE HUB Z	E	ØG	H	J	K	L	M	P	VOL (l)	JUNTAS SEALS JOINTS DICHTUNG.	PESO (kg) WEIGHT POIDS GEWICHT
53560/150	35	60	150	310	70	54	31	45	16	3/8"	4	0,42	J3560N	5,6
53560/200			200	360								0,57		6,4
53560/250			250	410								0,71		7,2
53560/350			350	510								0,99		8,7
53560/400			400	560								1,13		9,5
53560/500			500	660								1,41		11,1
54070/150	40	70	150	310	80	46	33	49	16	3/8"	5	0,58	J74N	7,4
54070/200			200	360								0,77		8,4
54070/250			250	410								0,96		9,3
54070/300			300	460								1,15		10,3
54070/400			400	560								1,54		12,2
54070/500			500	660								1,92		14,1
54070/600			600	760								2,31		16,0
54070/700			700	860								2,69		17,9
54080/200	40	80	200	375	90	49	33	54	16	3/8"	5	1,01	J75N	10,3
54080/300			300	475								1,51		12,3
54080/400			400	575								2,01		14,3
54080/500			500	675								2,51		16,4
54080/600			600	775								3,02		18,4
54080/700			700	875								3,52		20,4
55080/500	50	80	500	675	90	49	33	54	16	3/8"	5	2,51	J5080N	19,4
55080/600			600	775								3,02		31,9
55090/200	50	90	200	390	105	52	35	60	16	3/8"	6	1,27	J5090N	16,1
55090/300			300	490								1,90		19,4
55090/400			400	590								2,55		22,8
55090/500			500	690								3,18		26,1
55090/600			600	790								3,82		29,4
55090/700			700	890								4,45		32,8
550100/300	50	100	300	490	115	52	35	60	16	3/8"	6	2,36	J76N	21,7
550100/400			400	590								3,14		25,2
550100/500			500	690								3,93		28,7
550100/600			600	790								4,71		32,2
550100/700			700	890								5,50		35,7
570120/400	70	120	400	650	140	80	40	82	17	1/2"	6	4,52	J77N	45,8
570120/500			500	750								5,65		52,0
570120/600			600	850								6,78		58,2
570120/700			700	950								7,91		64,4

*Acabado: sin pintar / Finishing: raw / Finition : sans peinture / Fertigung: Ohne Lackierung

*Todas las medidas en milímetros / All measures in milimetres / Toutes les dimensions en millimetres / Alle Angaben sind in millimeter

*Actualizado / Updated / Actualisé / Aktualisiert:

08/05/2020

