



**SINGLE PILOT ASSISTED OVERCENTER
VALVE, WITH BRAKE UNCLAPPING
FOR DANFOSS MOTORS OMS,
OMSW, OMSS**

Dimensions

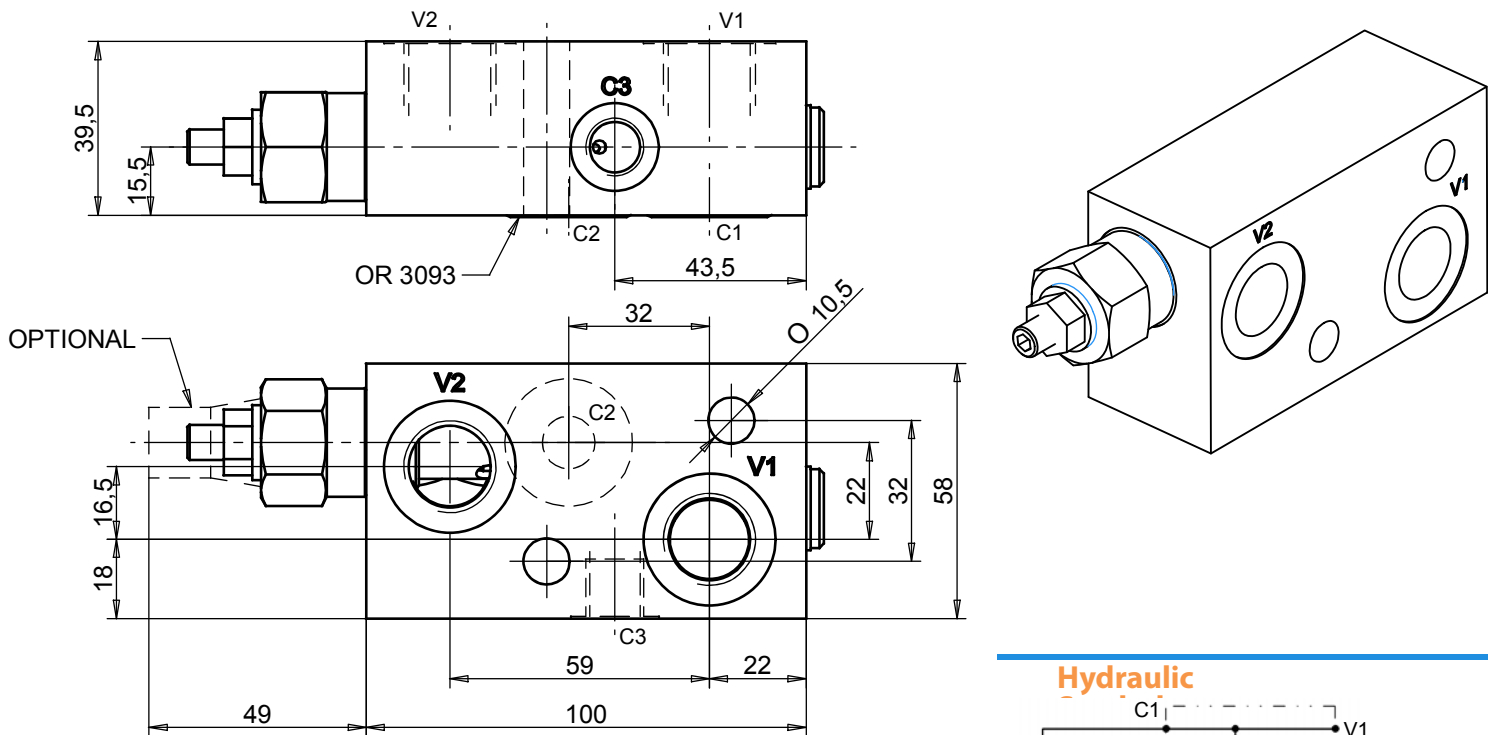

Curves

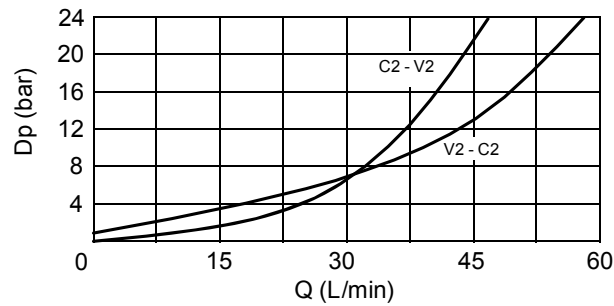

Features

Max Flow	60 lpm
Max Pressure	350 bar
Pilot Ratio	4,2:1 Standard
Ports	V1-V2: G 1/2 C3: G 1/4

Materials: Zinc plated steel cartridge, hardened steel inner parts
Aluminium manifold.

Ordering Code

CBSLSFOMS 03