


HYDRAULIC STAINLESS STEEL TANKS

All products are manufactured from **AISI 304 stainless steel**. Stainless **steel grades 316 and 316L** are available upon request.


The stated **capacity** represents approximately **two-thirds** of the total volume. The **standard version** is supplied with a sheet thickness of **2 / 2.5 mm**.

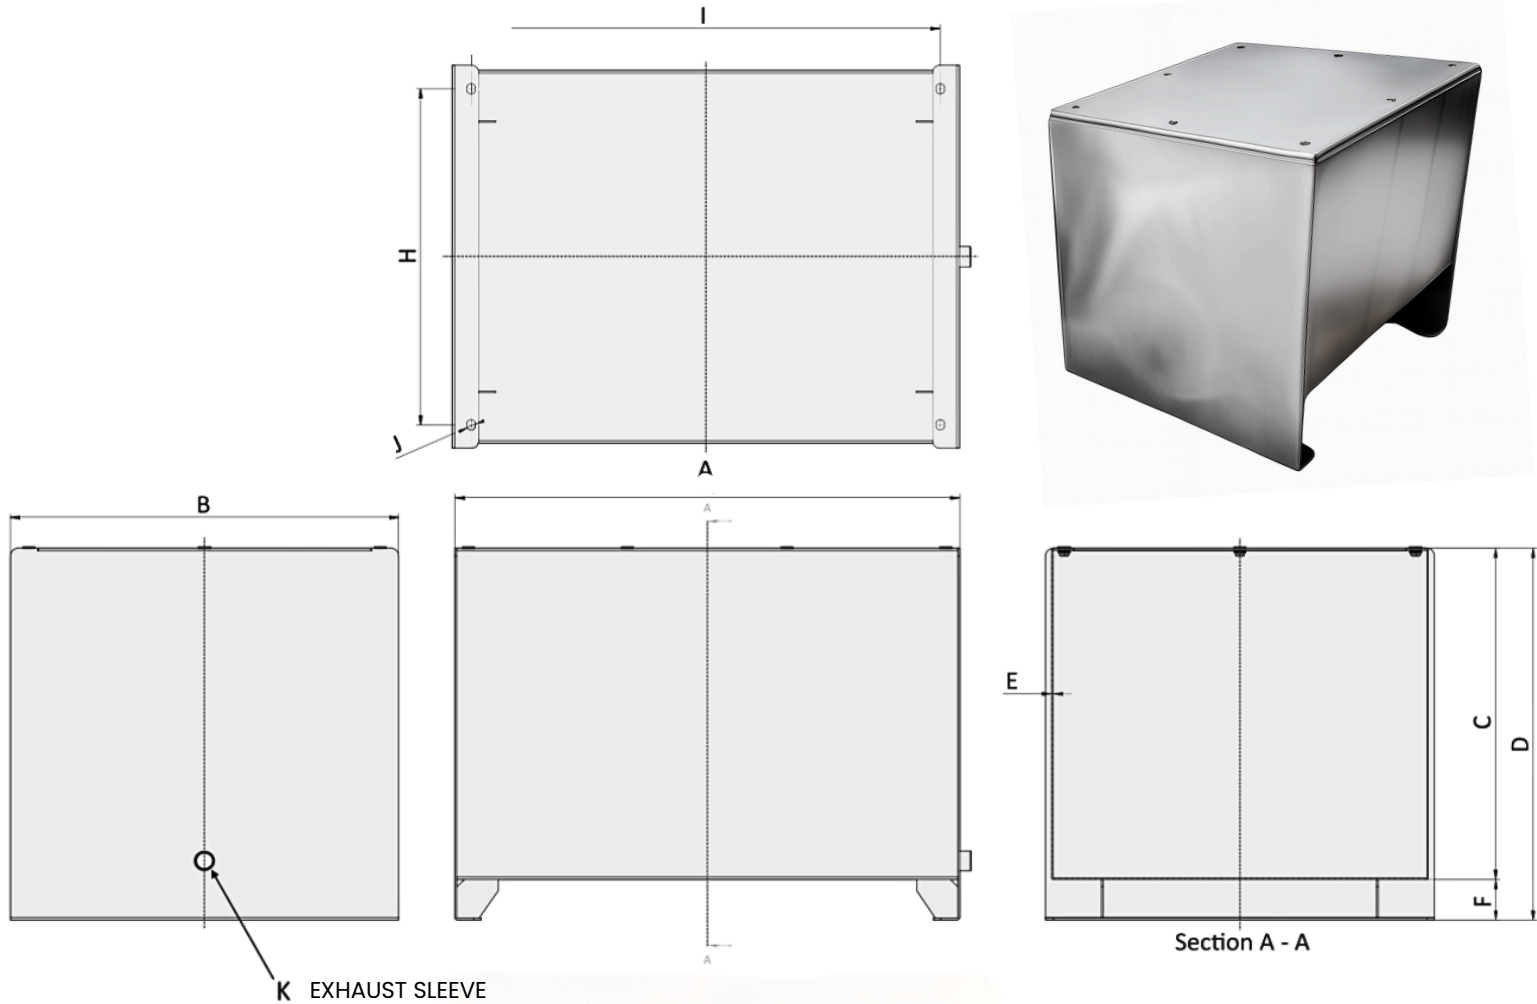

SKU	COVER	CAPACITY	A mm	B mm	C mm	D mm	E mm	F mm	H mm	I mm	J mm
SS12	CSS12	14	335	270	235	290	2	55	207	285	11.5
SS16	CSS16	22	410	325	250	305	2	55	270	365	11.5
SS30	CSS30	39	470	375	280	335	2.5	55	313	428	11.5
SS55	CSS55	58	600	470	310	365	2.5	55	400	548	11.5
SS75	CSS55	75	600	470	400	455	2.5	55	400	548	11.5
SS100	CSS100	100	675	520	450	505	2.5	55	456	625	11.5
SS180	CSS180	165	805	620	500	555	2.5	55	555	754	11.5

HYDRAULIC STAINLESS STEEL TANK LIDS

Our hydraulic steel tank lids are crafted from high-quality **AISI 304 stainless steel**, ensuring superior resistance to corrosion and wear. Designed for demanding hydraulic environments, these lids provide exceptional strength, reliability, and longevity.

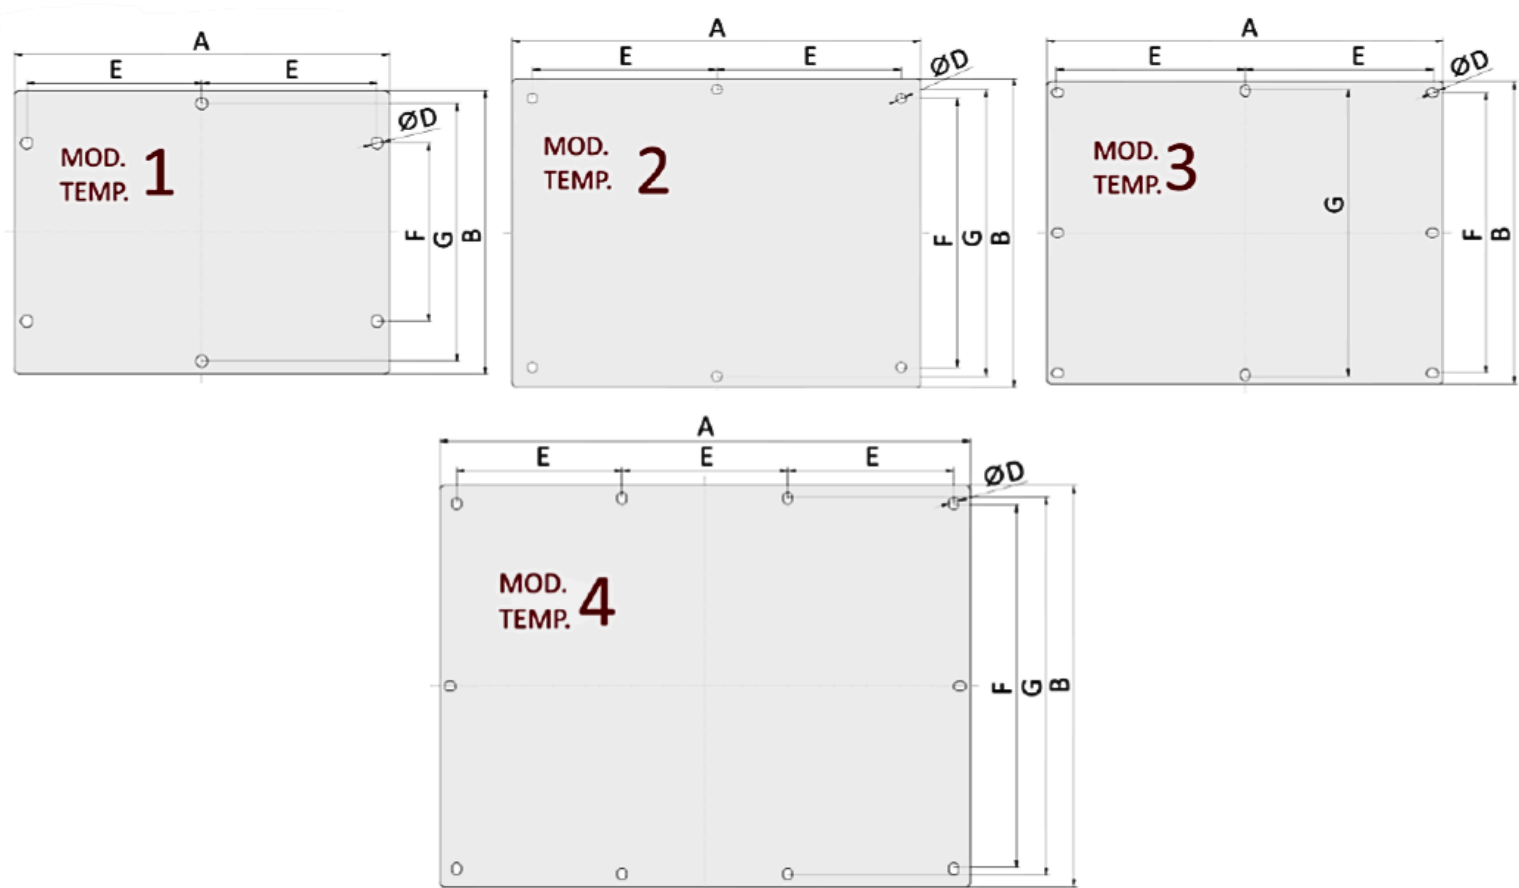

C = THICKNESS

SKU	TEMPLATE	A mm	B mm	C mm	D mm	E mm	F mm	G mm	NO. Holes	Thread
CSS12	1	330	250	4	10.5	154	157	227	6	M8
CSS16	2	410	310	4	10.5	185	270	288	6	M8
CSS30	3	465	355	4	10.5	220	330	334	8	M8
CSS55	4	595	450	4	10.5	186	410	422	10	M8
CSS100	4	670	500	4	10.5	213	470	470	10	M8
CSS180	4	800	600	4	10.5	256	570	570	10	M8