



COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

COLLETTORE OLIO
OIL MANIFOLD
ÖLVERTEILERBLOCK

CODICE/CODE/COE

CMA0260-OC-0 **-OL**

N° STAZIONI
NO. OF STATIONS
ANZAHL STATIONEN

- * **A-** alluminio (standard)
- S-** acciaio (su richiesta)
- X-** acciaio inox (su richiesta)
- * **A-** aluminium (standard)
- S-** steel (on request)
- X-** stainless steel (on request)
- * **A-** aluminium (standard)
- S-** stahl (auf Anfrage)
- X-** edelstahl (auf Anfrage)


N° (N° STAZIONI) (NO. OF STATIONS) (ANZAHL STATIONEN)	L	PESO WEIGHT GEWICHT kg
2	125	1,05
3	180	1,54
4	235	2,03
5	290	2,51
6	345	3,0
7	400	3,49
8	455	3,97
-	-	-

COLLETTORE SCHEMA A "L" INDIPENDENTI
MANIFOLDS WITH INDIPENDENT "Ls" SCHEME
VERTEILERBLOCK MIT "Ls" UNABHÄNGIGEN SCHEMA



FOTO/PICTURE/PICTURE


CMA0260-OC-05-OL

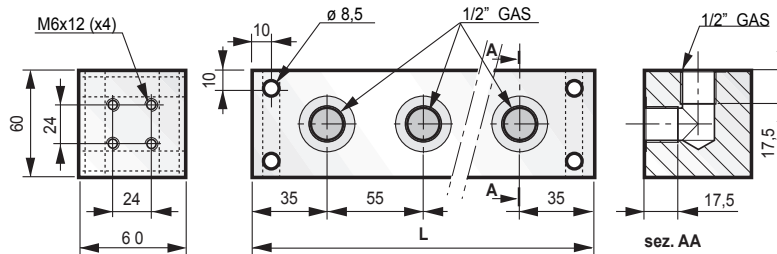

MASSIMA PRESSIONE DI LAVORO: 250 BAR (LEGA DI ALUMINIO)
MAXIMUM OPERATING PRESSURE: 250 BAR (ALUMINIUM ALLOY)
MAXIMALER BETRIEBSDRUCK: 250 BAR (ALUMINIUMLEGIERUNG)

TRATTAMENTO SUPERFICIALE ALLUMINIO: ANODIZZAZIONE NEUTRA SATINATA
ALUMINIUM SURFACE TREATMENT: NEUTRAL SATIN ANODIZING
OBERFLÄCHENBEHANDLUNG ALUMINIUM : NEUTRAL SATIN ANODISIERUNG

SCHEMA - DIAGRAM - SCHEMA



PER 2 ÷ 8 STAZIONI
FOR 2 TO 8 STATIONS
FÜR 2 - 8 STATIONEN



via S. Quirico, 201/H
50013 Campi Bisenzio - FI
www.oleorama.it
oleorama@oleorama.it
export@oleorama.it