



COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

COLLETTORE OLIO
OIL MANIFOLD
ÖLVERTEILERBLOCK

CODICE/CODE/CODE

CMA0270-OD-0 **-OL**

N° STAZIONI
NO. OF STATIONS
ANZAHL STATIONEN

- * **A**- alluminio (standard)
- S**- acciaio (su richiesta)
- X**- acciaio inox (su richiesta)
- * **A**- aluminium (standard)
- S**- steel (on request)
- X**- stainless steel (on request)
- * **A**- aluminium (standard)
- S**- stahl (auf Anfrage)
- X**- edelstahl (auf Anfrage)


N° (N° STAZIONI) (NO. OF STATIONS) (ANZAHL STATIONEN)	L	PESO WEIGHT GEWICHT kg
2	152,5	1,75
3	215	2,48
4	277,5	3,22
5	340	3,95
6	402,5	4,68
7	465	5,42
-	-	-
-	-	-

COLLETTORE SCHEMA A "L" INDIPENDENTI
MANIFOLDS WITH INDIPENDENT "Ls" SCHEME
VERTEILERBLOCK MIT "Ls" UNABHÄNGIGEN SCHEMA



FOTO/PICTURE/PICTURE


CMA0270-OD-05-OL

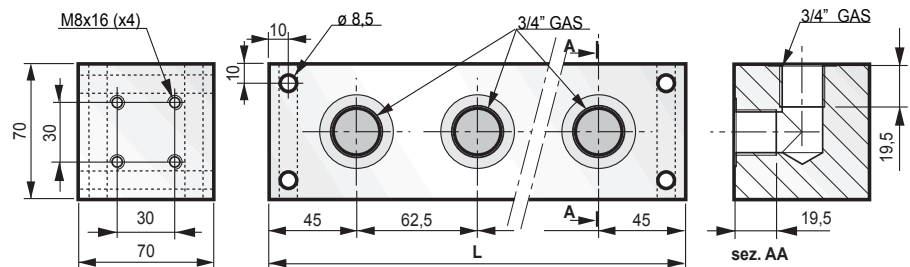

MASSIMA PRESSIONE DI LAVORO: 250 BAR (LEGA DI ALUMINIO)
MAXIMUM OPERATING PRESSURE: 250 BAR (ALUMINIUM ALLOY)
MAXIMALER BETRIEBSDRUCK: 250 BAR (ALUMINIUMLEGIERUNG)

TRATTAMENTO SUPERFICIALE ALLUMINIO: ANODIZZAZIONE NEUTRA SATINATA
ALUMINIUM SURFACE TREATMENT: NEUTRAL SATIN ANODIZING
OBERFLÄCHENBEHANDLUNG ALUMINIUM : NEUTRAL SATIN ANODISIERUNG

SCHEMA - DIAGRAM - SCHEMA



PER 2 ÷ 7 STAZIONI
FOR 2 TO 7 STATIONS
FÜR 2 - 7 STATIONEN



via S. Quirico, 201/H
50013 Campi Bisenzio - FI
www.oleorama.it
oleorama@oleorama.it
export@oleorama.it