

Directional Control Valve Series

DMG Series Manual Operated Directional Control Valves



Technical data

Model		DMG-02	DMG-03
Max. flow rate (l/min)		60	100
Max. working pressure (MPa)	A, B, P port	31.5	
	T port	16	
Weight (kgs)		1.5	4
Hydraulic fluid		Mineral oil	
Seal material		NBR seals	
Temperature range (°C)		-30 to +80	
Viscosity range (mm ² /s)		2.8 to 500	
Oil cleanliness class according to ISO4406		Class 20/18/15	

How to order

DM	G	02	3C2	W	B
Product type	Mounting type	Size	Spool symbol	Spool return	Handle position
Manual operated directional control valve	G: Subplate mounting	02: NG6 03: NG10	Refer to spool symbols	W: Spring return O: With detent	A: Handle on A port side B: Handle on B port side

Directional Control Valve Series


Spool symbols

3 spool positions Handle on A port side		3 spool positions Handle on B port side	
3C2		3C8	
3C3		3C9	
3C4		3C10	
3C5		3C11	
3C60		3C12	

2 spool positions Handle on A port side		2 spool positions Handle on B port side	
2B2		2B2L	
2B3		2B3L	
2B8		2B8L	

DMG subplate installation dimensions

DMG-02

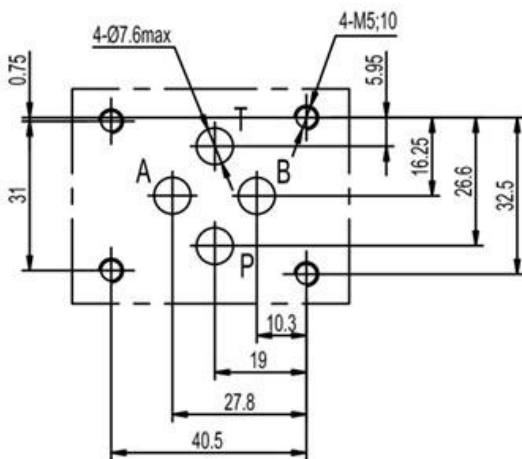

DMG-03

