



## SERIES 600 - STANDARD HYDRAULIC TOP LINK

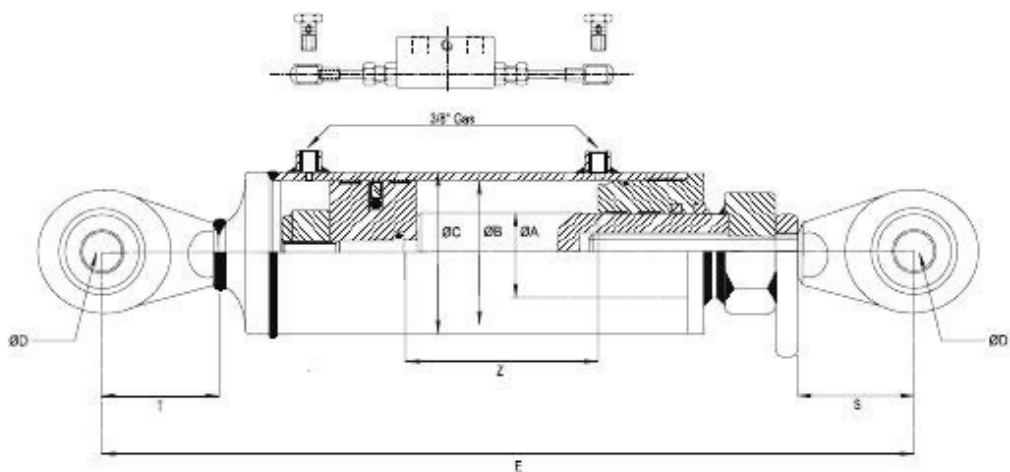

Option 1st: Dual pilot operated check valve set. (WADP008EX).  
Adjustable length between centers.

Option 2nd: Ability to change the standard ball joint for rapid hook in the rod. (Cat 2).

Working pressure: 180 bars.  
Speed: 0.5 m/s.  
Working temperature: -25°C - +80°C.  
Oil: Mineral oil.  
Rod: C45 f7 25 microns.  
Tube: St52.3 Din2393 Iso H9

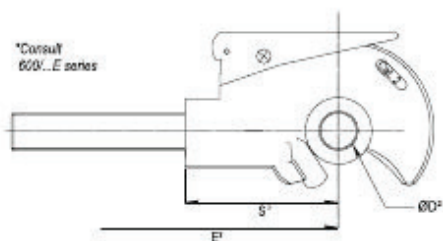

ORDER CODE	ØA	Z STROKE	E	E²	B	C	D	D²	S	S²	T	VOL	WEIGHT
600/020		200	510				25.4					0.6	11.5
600/025	40	250	560		60	70					65	0.75	12.5
600/030		300	610						55			0.9	13.5
601/020		200	530									0.8	14
601/025	45	250	580		70	80					70	1.05	15
601/030		300	630									1.25	16
600/020E		200		560				19.30				0.6	13.5
600/025E	40	250		610	60	70		22.40			65	0.75	14.5
600/030E		300		660				25.40	105			0.9	15.5
601/020E		200		580				30.40				0.8	16
601/025E	45	250		630	70	80		28.40			70	1.05	17
601/030E		300		680				32.40				1.25	18