


SERIES 610 - HYDRAULIC TOP LINK (FIXED)

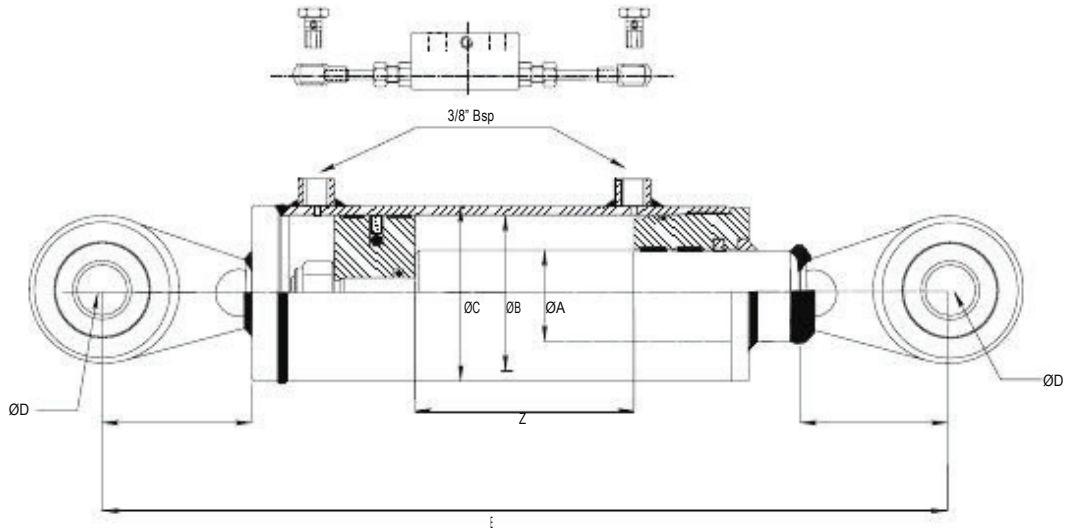

Working pressure: 180 bars.
 Speed: 0.5 m/s.
 Working temperature: -25°C - +80°C.
 Oil: Mineral oil.
 Rod: C45 f7 25 microns.
 Tube: St52.3 Din2393 Iso H9

Option : Dual pilot operated check valve set. (VADP008EX).
 Ball joints welded.

ORDER CODE	ØA	Z STROKE	E	B	C	ØD	S	VOL	WEIGHT
610/016		160	416			19.3		0.32	5.6
610/021		210	466			19.3	60	0.42	6.2
610/028		280	536			19.3		0.56	7.1
610/040	30	400	656			19.3		0.8	8.5
610/016A		160	426	50	60	25.4		0.32	6.3
610/021A		210	476			25.4		0.42	6.9
610/028A		280	546			25.4		0.56	7.9
610/040A		400	666			25.4	65	0.8	9.2
611/016		160	440			25.4		0.48	7.8
611/021	35	210	490			25.4		0.63	8.6
611/028		280	560	60	70	25.4		0.84	9.6
611/040		400	680			25.4		1.2	15.6
612/016		160	461			25.4		0.9	12.5
612/021	40	210	511			25.4	70	1.2	13.7
612/028		280	581	80	90	25.4		1.6	15.2
612/040		400	701			25.4		2.2	18