

# Female Union

## Female Union


### Features:

- High Working Pressure
- Mild Steel - High Grade Material
- Sealing face and threads machined to high tolerance
- High Level Corrosion Resistance Plating (CR3 compliant)
- Available in Stainless Steel 316 or Cupro Nickel



### Benefits:

- Highly resistant to leakage even under severe vibration, pressure pulsation and temperature

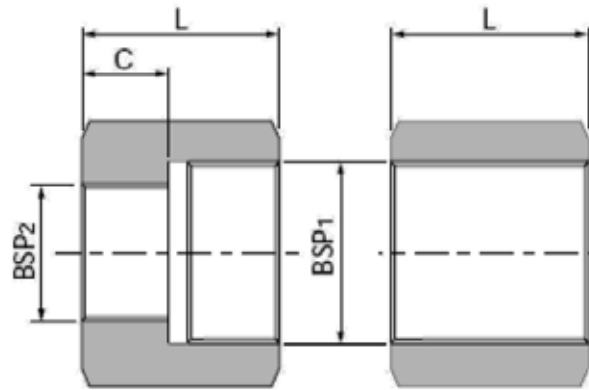

BSP 1	BSP 2	Part No	L mm	C mm	Body A/F mm	Max WP Bar
1/4	1/8	KRFA4-2	25	12	22	680
1/4	1/4	KRFA4-4	25	-	22	680
3/8	1/8	KRFA6-2	27	13	27	680
3/8	1/4	KRFA6-4	27	13	27	680
3/8	3/8	KRFA6-6	29	-	27	680
1/2	1/8	KRFA8-2	30	12	32	680
1/2	1/4	KRFA8-4	30	12	32	680
1/2	3/8	KRFA8-6	32	14	32	680
1/2	1/2	KRFA8-8	35	-	32	680
3/4	3/4	KRFA12-12	41	-	41	680
1	1	KRFA16-16	45	-	50	500
1-1/4	1-1/4	KRFA20-20	45	-	60	500