

FT6 & FT7 SERIES

Air breather filters



TECHNICAL INFORMATION

MATERIALS

Cover: chrome plated steel
Threaded connection: zinc plated steel

FILTER MEDIA:

Polyurethane (air filtration 3 μm and 10 μm)

PRESSURIZATION VALVE:

0,35 or 0,75 bar (for FT7 only)


WORKING TEMPERATURE:

-25° + 100°C (-13°F + 212°F)


FLUID COMPATIBILITY:
 (acc. to ISO 2943)

Mineral oil, vegetable oil, synthetic oil.
 For use with other fluids(in particular HFA-HFC-HFD/R -HPG) please contact the FILTREC Customer Service (info@filtrec.it).

ORDERING INFORMATION

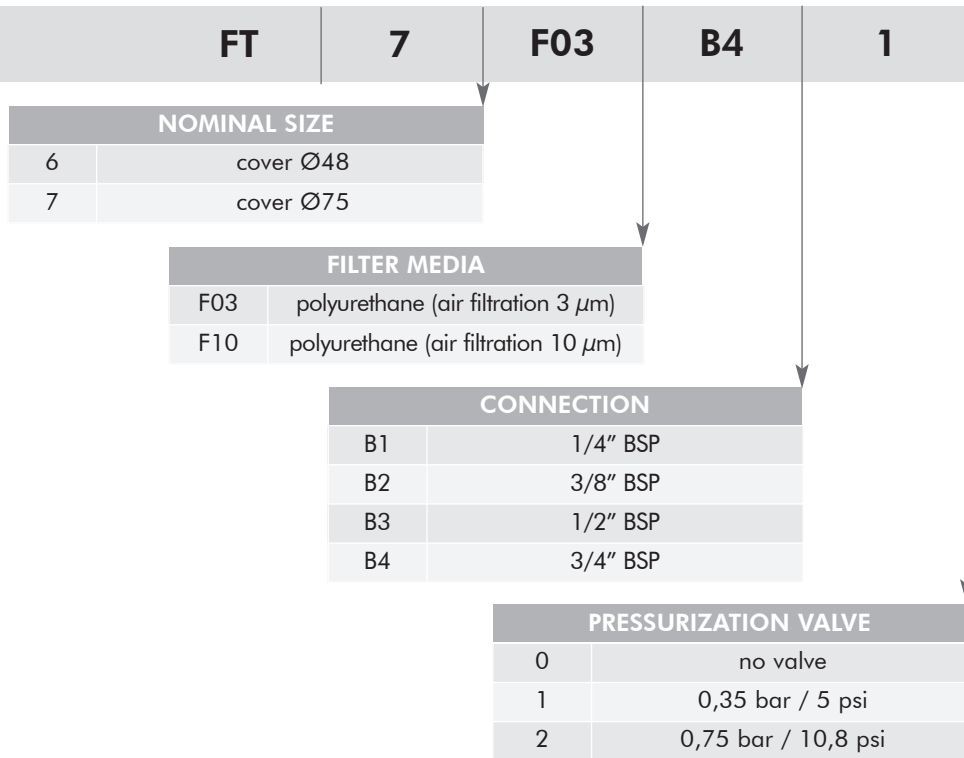

OVERALL DIMENSIONS

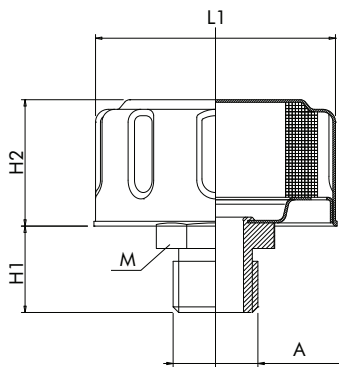

NOMINAL SIZE

CODE	A	H1	H2	L1	M	Air flow rate l/min Δp 0,015 barg	
						F03	F10
FT6...B1	1/4" BSP	27	31	48	22	250	250
FT6...B2	3/8" BSP						
FT7...B3	1/2" BSP	35,5	75	27	32	450	550
FT7...B4	3/4" BSP						