



COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

COLLETTORE OLIO
OIL MANIFOLD
ÖLVERTEILERBLOCK

CODICE/CODE/COE

CMA0160-DC-0-OL

N° STAZIONI
NO. OF STATIONS
ANZAHL STATIONEN

- * A- alluminio (standard)
- S- acciaio (su richiesta)
- X- acciaio inox (su richiesta)
- * A- aluminium (standard)
- S- steel (on request)
- X- stainless steel (on request)
- * A- aluminium (standard)
- S- stahl (auf Anfrage)
- X- edelstahl (auf Anfrage)


N° (N° STAZIONI) (NO. OF STATIONS) (ANZAHL STATIONEN)	L	PESO WEIGHT GEWICHT kg
2	125	0,97
3	180	1,43
4	235	1,88
5	290	2,34
6	345	2,79
7	400	3,25
8	455	3,7
-	-	-

COLLETTORE SCHEMA PARALLELO
PARALLEL SCHEME MANIFOLD
VERTEILERBLOCK MIT PARALLELSCHEMA



FOTO/PICTURE/PICTURE

CMA0160-DC-05-OL

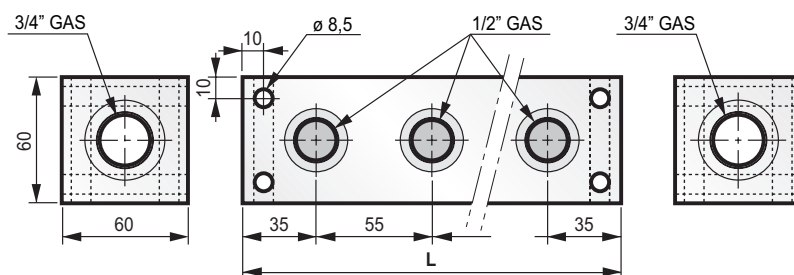

MASSIMA PRESSIONE DI LAVORO: 250 BAR (LEGA DI ALUMINIO)
MAXIMUM OPERATING PRESSURE: 250 BAR (ALUMINIUM ALLOY)
MAXIMALER BETRIEBSDRUCK: 250 BAR (ALUMINIUMLEGIERUNG)

TRATTAMENTO SUPERFICIALE ALLUMINIO: ANODIZZAZIONE NEUTRA SATINATA
ALUMINIUM SURFACE TREATMENT: NEUTRAL SATIN ANODIZING
OBERFLÄCHENBEHANDLUNG ALUMINIUM : NEUTRAL SATIN ANODISIERUNG

SCHEMA - DIAGRAM - SCHEMA

