



PTHK 90 PATRONENEINSCHRAUBHEIZKÖRPER CARTRIDGE SCREWED-IN HEATERS



- Patronenheizkörper zur Vorwärmung von Hydrauliköl
 - Auswechselbarer keramischer Heizeinsatz (Montage/Demontage ohne Ölablass möglich)
 - Glanzverzinkte Stahlhaube
 - Für waagerechten Einbau unter Ölspiegel
 - Werkstoff: Stahl (weitere Werkstoffe auf Anfrage)
 - Oberflächenbelastung 1,5 W/cm² für Hydrauliköle
 - Schutzart IP 65
 - Schaltbilder für unterschiedliche Anschlussspannungen auf Anfrage
- Cartridge heaters for preheating of hydraulic oil
 - Exchangeable ceramic heating insert (mounting/dismounting possible without evacuation of oil)
 - Bright galvanized steel cap
 - For horizontal mounting under oil level
 - Material: Steel (further materials on request)
 - Surface charge 1.5 W/cm² for hydraulic oils
 - Protection IP 65
 - Wiring schemes for different mains voltages on request

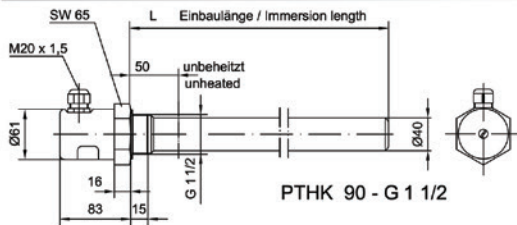

PTHK 90 - G 1 1/2

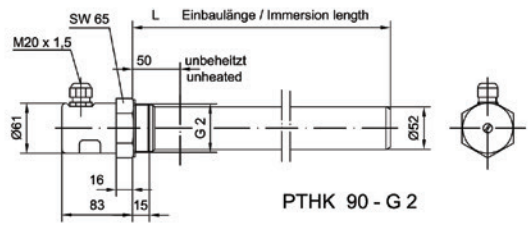

PTHK 90 - G 2

ART.-NR. PART NO.	TYP TYPE	LEISTUNG (WATT) POWER (WATT)	L= TAUCHTIEFE (mm) L= IMM. DEPTH (mm)	SPANNUNG (VOLT) VOLTAGE (VOLT)	€ LIST
TH1705*	PTHK 90-G 1 1/2"	400	200	Unbedingt bei der Bestellung angeben: In case of order please specify: Variante 1: 1 x 230 V Variante 3: 3 x 380 V Variante 5: 3 x 400 V	
TH1707*		600	300		
TH1709*		800	400		
TH1711*		1000	500		
TH1713*		1200	600		
TH1715*		1400	700		
TH1717		1600	800		
TH1719		1800	900		
TH1721		2000	1000		
TH1723		2200	1100		
TH1725		2400	1200		
TH1727		2800	1400		
TH1729		3200	1600		
TH1731		3600	1800		
TH1733	4000	2000			

ART.-NR. PART NO.	TYP TYPE	LEISTUNG (WATT) POWER (WATT)	L= TAUCHTIEFE (mm) L= IMM. DEPTH (mm)	SPANNUNG (VOLT) VOLTAGE (VOLT)	€ LIST
TH1750*	PTHK 90-G 2"	500	200	Unbedingt bei der Bestellung angeben: In case of order please specify: Variante 1: 1 x 230 V Variante 3: 3 x 380 V Variante 5: 3 x 400 V	
TH1752*		750	300		
TH1754		1000	400		
TH1756		1250	500		
TH1758		1450	600		
TH1760		1700	700		
TH1762		1950	800		
TH1764		2200	900		
TH1766		2450	1000		
TH1768		2700	1100		
TH1770		2950	1200		
TH1772		3450	1400		
TH1774		3900	1600		
TH1776		4400	1800		
TH1778	4900	2000			

*] Spannung max. 2-phasig Voltage two-phase max.

*] Spannung max. 2-phasig Voltage two-phase max.

BESTELLSCHLÜSSEL

ORDERING CODE

