

Horizontal Engines



1.8hp LC152F

	LC152F
Engine Type	SV
Net Power (hp @ r/min)	1.8 @ 3600
Net Power (kW @ r/min)	1.35 @ 3600
Net Torque (Nm @ r/min)	3.3 @ 3000
Bore x Stroke (mm)	52 x 46
Displacement (cc)	97
Compression Ratio	5.6 : 1
Oil Capacity	0.45
Fuel Consumption	≤ 450 g/kw h
Oil Consumption	≤ 6.8 g/kw h
Idle Speed	1700 ± 150
Starting System	Recoil
Noise (≤ 7m)	70dBA
Dimensions (L x W x H mm)	270 x 270 x 345
Net Weight (kg)	9



2.1hp LC154F

	LC154F
Engine Type	Single cylinder, 4-stroke, OHV, forced air cooling
Net Power (hp @ r/min)	2.1 @ 3600
Net Power (kW @ r/min)	1.6 @ 3600
Net Torque (Nm @ r/min)	4.5 @ 3000
Bore x Stroke (mm)	54 x 38
Displacement (cc)	87
Compression Ratio	8.0 : 1
Oil Capacity	0.35
Fuel Consumption	≤ 450 g/kw h
Oil Consumption	≤ 6.8 g/kw h
Idle Speed	1800 ± 150
Starting System	Recoil
Noise (≤ 7m)	70dBA
Dimensions (L x W x H mm)	310 x 260 x 305
Net Weight (kg)	10.5



3.5hp G120F

Model	G120F
Engine Type	Single cylinder, 4-stroke, OHV, forced air cooling
Net Power (hp @ r/min)	3.5 @ 3600
Net Power (kW @ r/min)	2.6 @ 3600
Net Torque (Nm @ r/min)	7.3 @ 2500
Bore x Stroke (mm)	60 x 42
Displacement (cc)	118
Compression Ratio	8.5 : 1
Oil Capacity	0.6
Fuel Consumption	≤ 395 g/kw h
Oil Consumption	≤ 6.8 g/kw h
Idle Speed	1450 ± 150
Starting System	Recoil / Electric start
Noise (≤ 7m)	70dBA
Dimensions (L x W x H mm)	341 x 305 x 318
Net Weight (kg)	13



4.8hp G160F

Model	G160F
Engine Type	Single cylinder, 4-stroke, OHV, forced air cooling
Net Power (hp @ r/min)	4.8 @ 3600
Net Power (kW @ r/min)	3.6 @ 3600
Net Torque (Nm @ r/min)	10.3 @ 2500
Bore x Stroke (mm)	68 x 45
Displacement (cc)	163
Compression Ratio	8.5 : 1
Oil Capacity	0.6
Fuel Consumption	≤ 395 g/kw h
Oil Consumption	≤ 6.8 g/kw h
Idle Speed	1450 ± 150
Starting System	Recoil / Electric start
Noise (≤ 7m)	70dBA
Dimensions (L x W x H mm)	362 x 312 x 335
Net Weight (kg)	15



5.5hp G200F

Model	G200F
Engine Type	Single cylinder, 4-stroke, OHV, forced air cooling
Net Power (hp @ r/min)	5.5 @ 3600
Net Power (kW @ r/min)	4.1 @ 3600
Net Torque (Nm @ r/min)	12.4 @ 2500
Bore x Stroke (mm)	68 x 54
Displacement (cc)	196
Compression Ratio	8.5 : 1
Oil Capacity	0.6
Fuel Consumption	≤ 395 g/kw h
Oil Consumption	≤ 6.8 g/kw h
Idle Speed	1450 ± 150
Starting System	Recoil / Electric start
Noise (≤ 7m)	70dBA
Dimensions (L x W x H mm)	376 x 312 x 335
Net Weight (kg)	16



7hp G240F

Model	G240F
Engine Type	Single cylinder, 4-stroke, OHV, forced air cooling
Net Power (hp @ r/min)	7.0 @ 3600
Net Power (kW @ r/min)	5.2 @ 3600
Net Torque (Nm @ r/min)	15.1 @ 2500
Bore x Stroke (mm)	73 x 58
Displacement (cc)	242
Compression Ratio	8.2 : 1
Oil Capacity	0.95
Fuel Consumption	≤ 374 g/kw h
Oil Consumption	≤ 6.8 g/kw h
Idle Speed	1450 ± 150
Starting System	Recoil / Electric start
Noise (≤ 7m)	70dBA
Dimensions (L x W x H mm)	430 x 380 x 410
Net Weight (kg)	24.5





9.5hp G340F

	G340F
Engine Type	Single cylinder, 4-stroke, OHV, forced air cooling
Net Power (hp @ r/min)	9.5 @ 3600
Net Power (kW @ r/min)	7.1 @ 3600
Net Torque (Nm @ r/min)	21.6 @ 2500
Bore x Stroke (mm)	82 x 64
Displacement (cc)	337
Compression Ratio	8 : 1
Oil Capacity	1.1
Fuel Consumption	≤ 374 g/kw h
Oil Consumption	≤ 6.8 g/kw h
Idle Speed	1450 ± 150
Starting System	Recoil / Electric start
Noise (≤ 7m)	70dBA
Dimensions (L x W x H mm)	450 x 405 x 443
Net Weight (kg)	31



12hp G390F

	G390
Engine Type	Single cylinder, 4-stroke, OHV, forced air cooling
Net Power (hp @ r/min)	12 @ 3600
Net Power (kW @ r/min)	9 @ 3600
Net Torque (Nm @ r/min)	26.5 @ 2500
Bore x Stroke (mm)	90 x 66
Displacement (cc)	420
Compression Ratio	8.3 : 1
Oil Capacity	1.1
Fuel Consumption	≤ 374 g/kw h
Oil Consumption	≤ 6.8 g/kw h
Idle Speed	1450 ± 150
Starting System	Recoil / Electric start
Noise (≤ 7m)	70dBA
Dimensions (L x W x H mm)	450 x 405 x 443
Net Weight (kg)	31



12hp G420F

	G420
Engine Type	Single cylinder, 4-stroke, OHV, forced air cooling
Net Power (hp @ r/min)	12 @ 3600
Net Power (kW @ r/min)	9 @ 3600
Net Torque (Nm @ r/min)	26.5 @ 2500
Bore x Stroke (mm)	90 x 66
Displacement (cc)	420
Compression Ratio	8.3 : 1
Oil Capacity	1.1
Fuel Consumption	≤ 374 g/kw h
Oil Consumption	≤ 6.8 g/kw h
Idle Speed	1450 ± 150
Starting System	Recoil / Electric start
Noise (≤ 7m)	70dBA
Dimensions (L x W x H mm)	450 x 405 x 443
Net Weight (kg)	31




19.7 hp V-Twin

	LC2V78FD-1
Engine Type	V-Twin, 4-stroke, OHV, forced air cooling
Net Power (hp @ r/min)	19.7 @ 3600
Net Power (kW @ r/min)	14.7 @ 3600
Net Torque (Nm @ r/min)	43.5 @ 2500
Bore x Stroke (mm)	78 x 71
Displacement (cc)	678
Compression Ratio	8.5 : 1
Fuel Consumption	≤ 360 g/kw h
Idle Speed	1500 ± 150
Speed Fluctuate Ratio	≤ 10%
Starting Mode	Electric
Dimensions (L x W x H mm)	510 x 400 x 450
Net Weight (kg)	43




Repower Engines - Shaft Drawings

LC152F

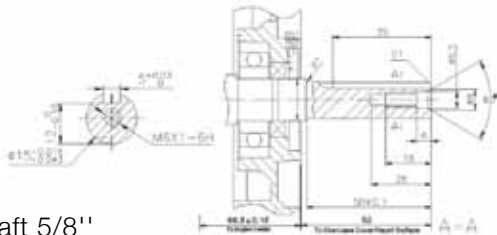


STD-Shaft 5/8"

LC152F

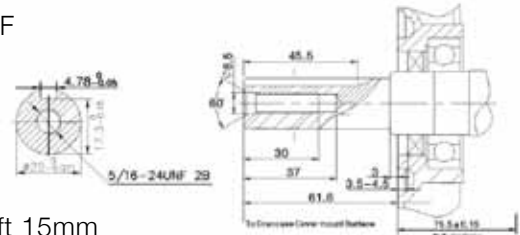


M-Shaft 15mm

G120F

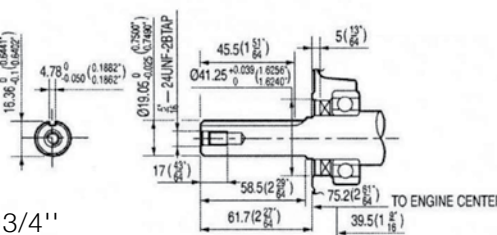


P-Shaft 3/4"

G120F

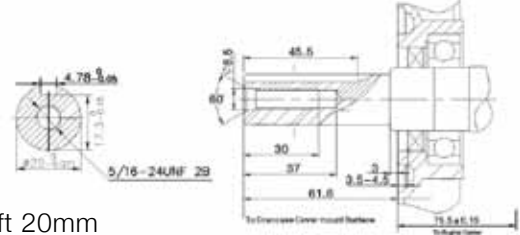


M-Shaft 20mm

G160F

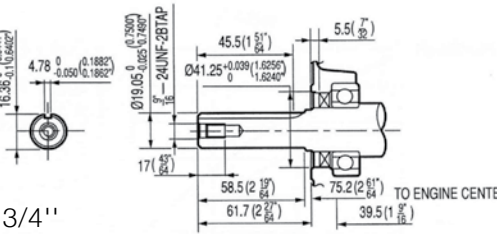


P-Shaft 3/4"

G160F

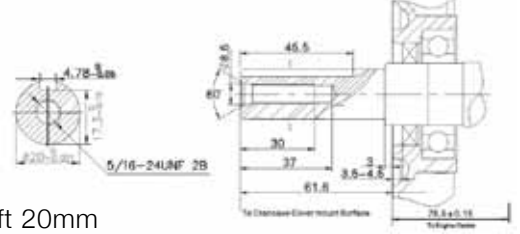


M-Shaft 20mm

G200F

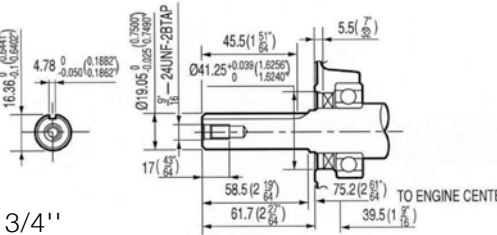


P-Shaft 3/4"

G200F

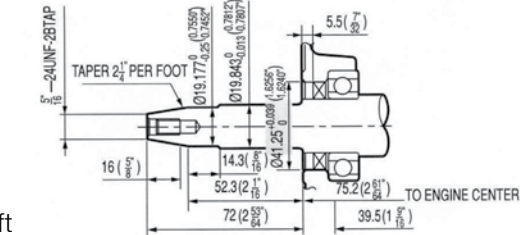


G-Shaft

G200F

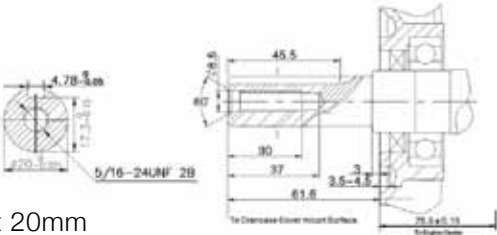


M-Shaft 20mm

G240F

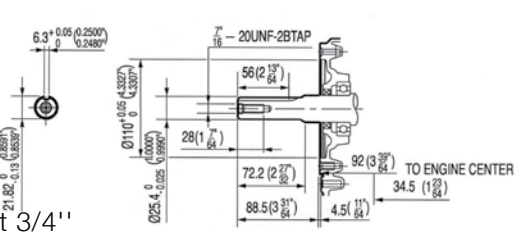


P-Shaft 3/4"

G340F

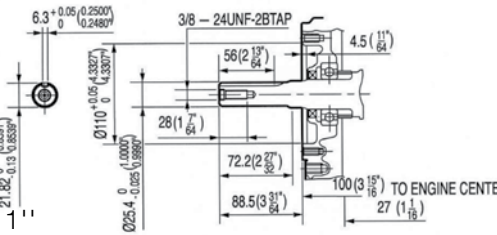


P-Shaft 1"

G340F

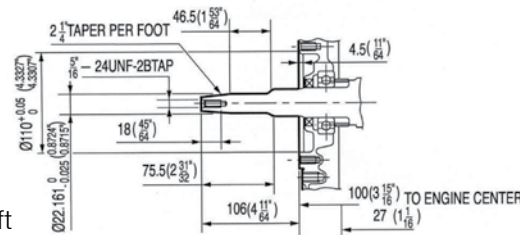


G-Shaft

G390F

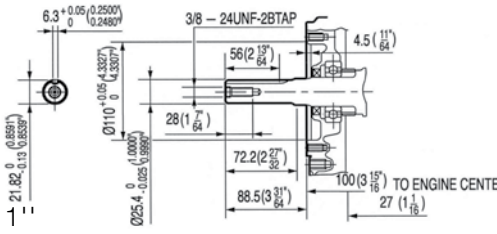

P-Shaft 1"

G390F

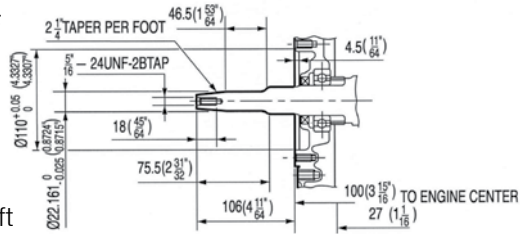


G-Shaft

FEATURES

Definition of pressures

The pumps can be subjected to the pressures P1, P2 or P3 indicated in the performance tables. The following diagram illustrates the definitions and applicability of these, compared to the rotation speed limits included.

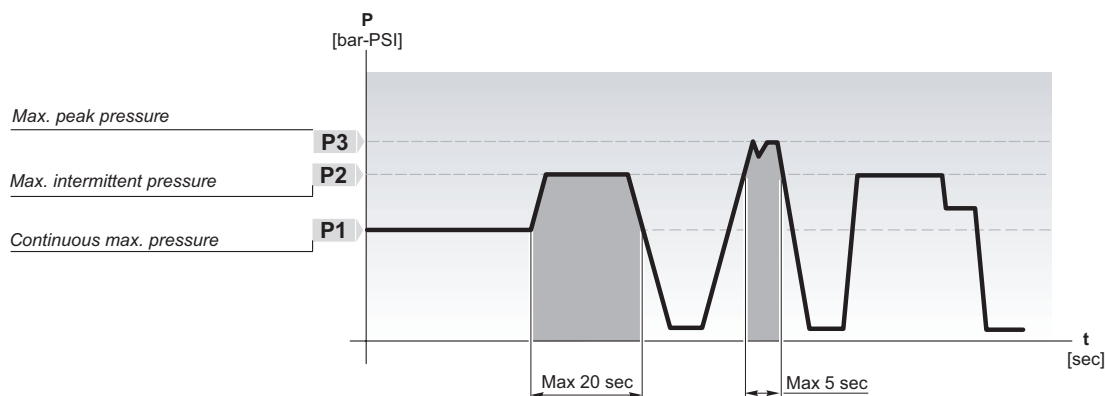

Hydraulic measures

Q Flow	[l/min - Gal/min]
M Torque	[Nm - lbf.in]
P Power	[kW - HP]
V Displacement	[cm ³ /rev - in ³ /rev]
N Speed	[min ⁻¹ - rpm]
Δp Pressure	[bar - PSI]

η_v Volumetric efficiency

η_m Mechanical efficiency

Useful formulas

$$Q = V \text{ [cm}^3\text{/rev]} \times \eta_v \times n \times 10^{-3} \text{ l/min}$$

$$M = \frac{\Delta p \text{ [bar]} \times V \text{ [cm}^3\text{/rev]}}{62.83 \times \eta_m} \text{ Nm}$$

$$P = \frac{\Delta p \text{ [bar]} \times V \text{ [cm}^3\text{/rev]} \times n}{600 \times 1000 \times \eta_t} \text{ kW}$$

Conversion factors

1 l/min = 0.2641 US Gal/min
1 Nm = 8.851 in·lbs
1 Nm = 0.7375 ft·lbs
1 N = 0.2248 lbs
1kW = 1.34 HP
1cm ³ /giro = 0.061 in ³ /rev
1 bar = 14.5 PSI
1 mm = 0.0394 in
1 kg = 2.205 lbs

TECHNICAL INFORMATION



Hydraulic fluids

It is advisable to use hydraulic oils of mineral origin with anti-foaming, anti-oxidant and anti-corrosion characteristics and a high viscosity index;

- Recommended viscosity $15 \div 92 \text{ mm}^2/\text{s}$ (cSt)
- Start-up viscosity limit $3000 \text{ mm}^2/\text{s}$ (cSt)

During normal operation, the temperature of the oil must be between 20°C and 65°C and limit values between -15°C and 80°C .

Suction pressure

The allowed working pressure supplied must be in the range $0.7 - 3 \text{ bar}$ (absolute).

For higher values (up to 30 bar), versions with a K seal must be used.

Suction and delivery pipes

Particular attention must be given to the sizing of pipes (rigid or flexible), avoiding disproportionate lengths, sudden variations in cross section or small curvature radius, in any case selecting pipe cross-sections that guarantee an oil speed between 0.6 and 12 m/s .

Filtration

In order to eliminate any impurities present in the oil and to guarantee a longer duration of the pump, the system must be equipped with effective filtration which must be periodically checked to ensure that it is operating correctly.

The following are the recommended filtration levels:

- $26/23 \text{ ISO DIS 4406}$ up to 150 bar
- $23/20 \text{ ISO DIS 4406}$ for higher pressures.

Installation notes

- Make sure that the coupling used for pulling compensates for any axial misalignments that could compromise the integrity of the pump.
- If there are radial and/or axial loads on the pump shaft (as is the case, for example, when pulling is carried out using pulleys and belts) the versions available with a support must be chosen.
- The connection coupling between spline shafts must be appropriately lubricated, free to move axially and of an adequate length to cover the entire extension of the two shafts (motor and pump).
- If the pump is painted, protect the shaft seal and also make sure that the contact zone between the shaft seal and the shaft is free of dust or abrasive sediments.

Rotation direction

The rotation direction is defined as S (left/anticlockwise) or D (right/clockwise) by observing the shaft from the front.


The pumps are monodirectional and therefore when ordering the required rotation direction must be specified; alternatively it is possible to modify the internal set-up as illustrated below (inversion of the rotation direction).

The pages regarding the pump characteristics highlight the directions of the delivery and suction flows for each version and rotation direction.

Pressure drops

The following nomogram allows you to calculate the pressure drops for each 100 m of piping when the viscosity of the oil, the delivery capacity of the pump and the diameter of the piping are known.


The viscosity (V), flow capacity (Q) and diameter (D) values are fixed on the respective scales; a line is drawn joining the points V and Q; the point where this intersects the index line is defined as point I. If the line joining point I to point D is extended, the load pressure drops value can then be read at the intersection with the last scale.

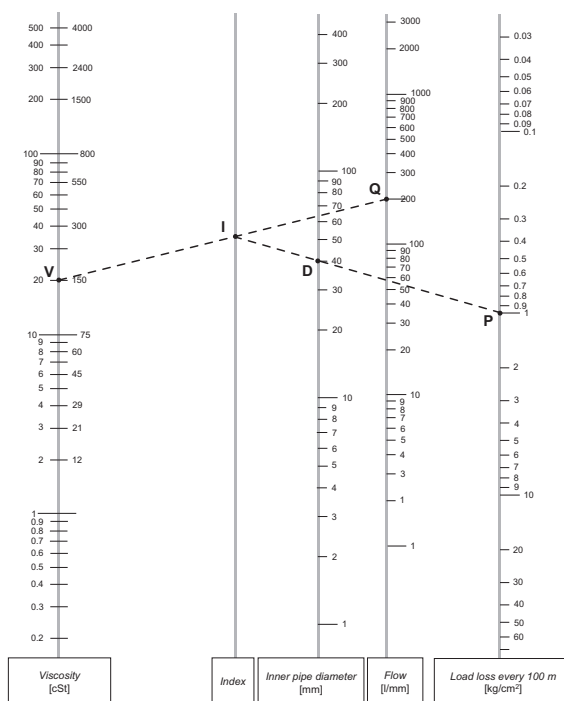

TECHNICAL INFORMATION



How to reverse pump rotation

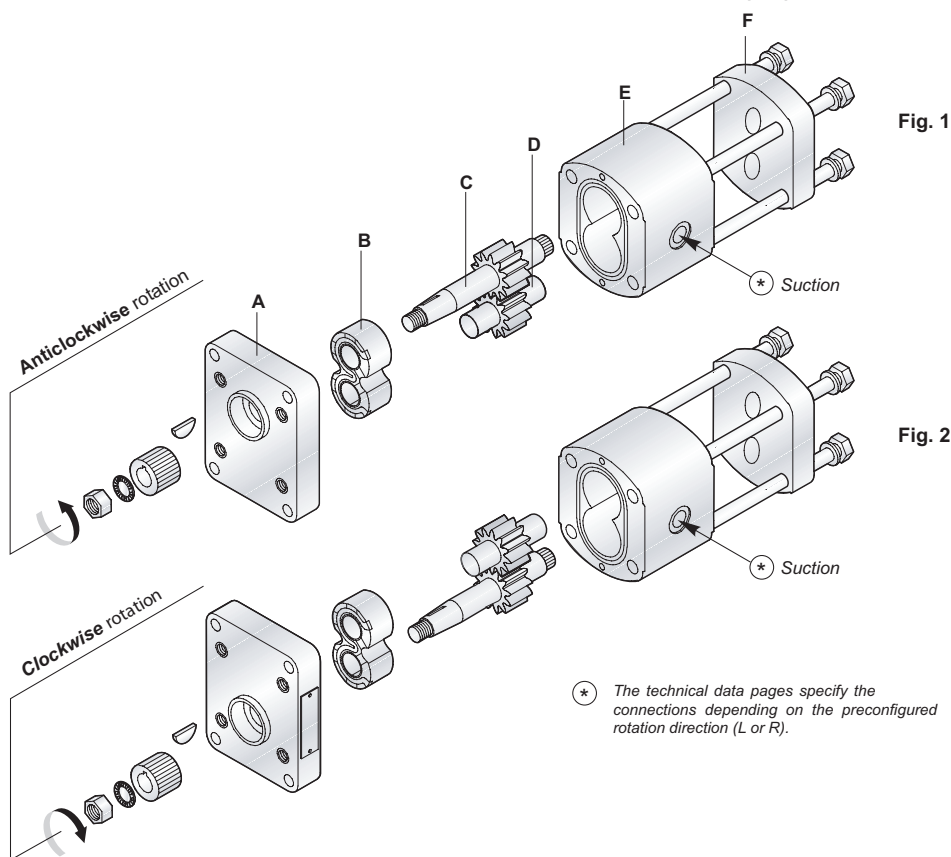

The gear pumps direction of rotation is indicated by an arrow on the label.

How to reverse the pumps rotation:


- Disassemble pump as shown in figure 1.
- Pull off gears C - D and reassemble according to figure 2.
- Reassemble bushing B as before.
- Reverse the flange A and reassemble the pump tightening the screws by using a torque wrench.
- For the pumps GR3 - GR4, disassemble only front flange.

Type of pump	GR1	GR2	GR3	GR4
Numbers of screws	4	4	16	16
Type of threads	M8	M10	M10	M14
Tightening torque of screws	30 Nm (266 in-lbs)	50 Nm (443 in-lbs)	60 Nm (531 in-lbs)	140 Nm (1239 in-lbs)
Type of coupling	1IS 12M	2IS 14M 2IS 15M	3IS 18M	4IS 23M
Tightening torque at nut coupling	9 ÷ 10 Nm (80 ÷ 89 in-lbs)	22 ÷ 25 Nm (195 ÷ 221 in-lbs) 32 ÷ 35 Nm (283 ÷ 310 in-lbs)	50 ÷ 55 Nm (443 ÷ 487 in-lbs)	100 ÷ 120 Nm (885 ÷ 1062 in-lbs)




PUMPS GROUP 2 • PERFORMANCE



Flow - Speed chart

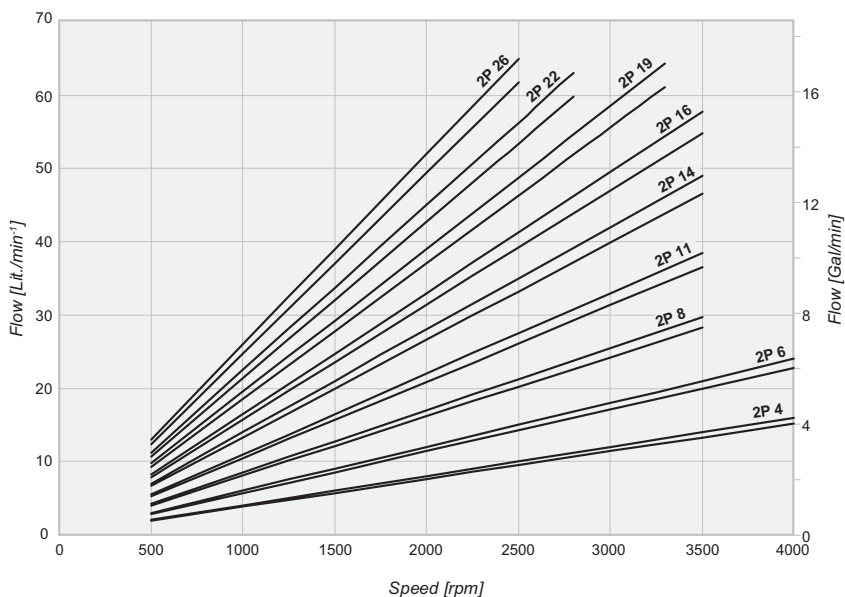







Pumps Group 2 Power and Speed Diagrams

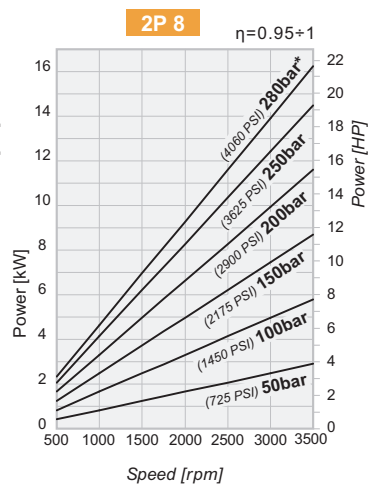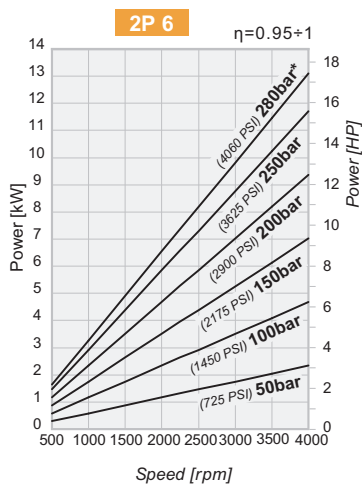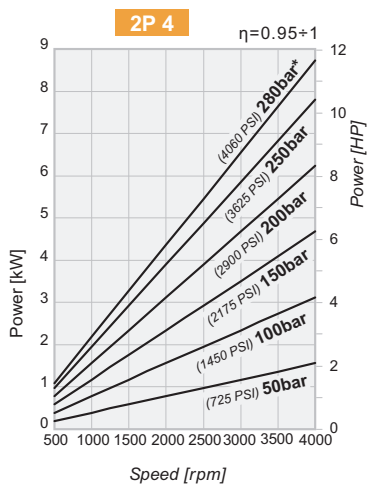

* Only for cast iron pumps

PUMPS GROUP 2 • PERFORMANCE

Pumps Group 2 Power and Speed Diagrams

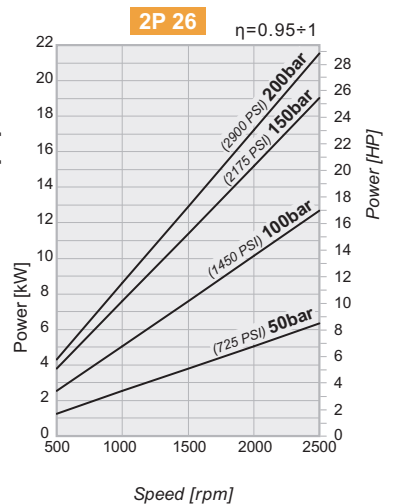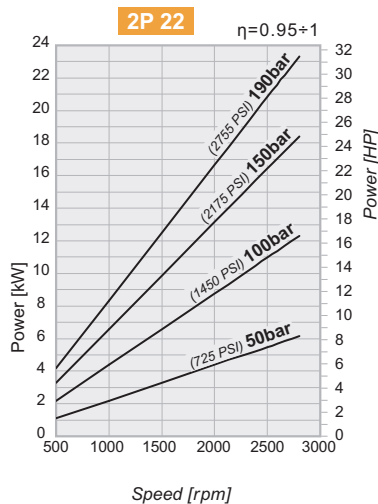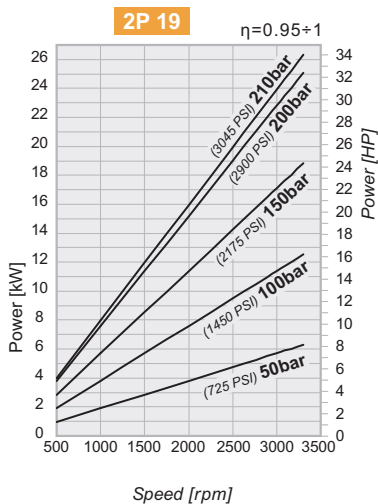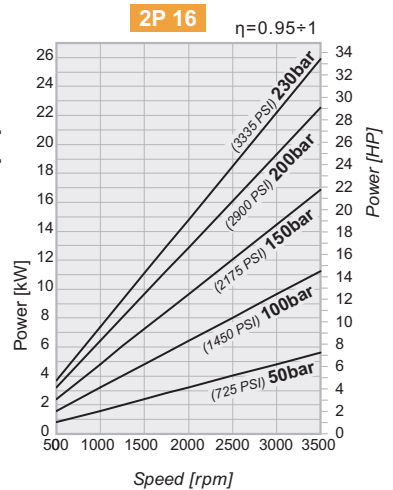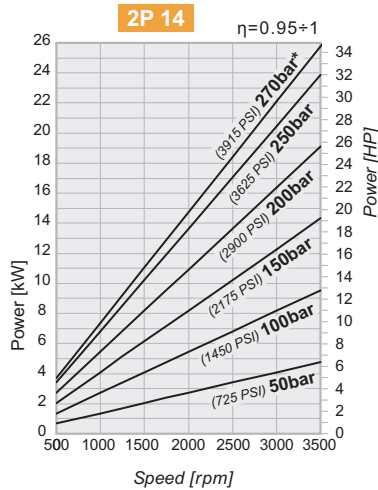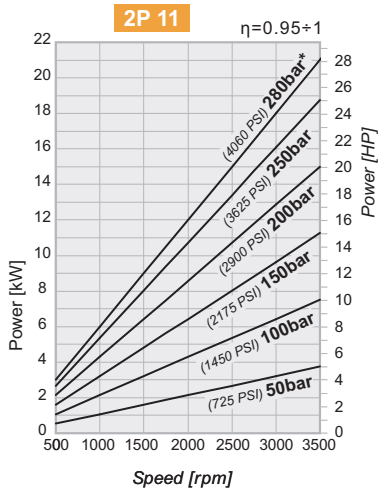

PUMPS GROUP 2 • STANDARD



Flange and cover in Aluminium

Technical data

Size	Displacement [cm³/rev] (in³/rev)	Max. working pressure			Max. speed [g/min] (rpm)	Max. flow [l/min] (Gal/min)	Min. speed [g/min] (rpm)	Min. flow [l/min] (Gal/min)	Dimensions		Mass [Kg] (lbs)	Min. volumetric efficiency %
		P1 [bar] (PSI)	P2 [bar] (PSI)	P3 [bar] (PSI)					A [mm] (inch)	B [mm] (inch)		
2SP A4	4 (0.24)	250 (3625)	270 (3915)	290 (4205)	4000	16 (4.23)	500	1.9 (0.50)	44.4 (1.748)	93 (3.661)	2.30 (5.07)	95*
2SP A6	6 (0.37)	250 (3625)	270 (3915)	290 (4205)	4000	24 (6.34)	500	2.85 (0.75)	46 (1.811)	96.3 (3.791)	2.45 (5.40)	
2SP A8	8.5 (0.52)	250 (3625)	270 (3915)	290 (4205)	3500	29.7 (7.85)	500	4.03 (1.06)	48.1 (1.894)	100.5 (3.957)	2.60 (5.73)	
2SP A11	11 (0.67)	250 (3625)	270 (3915)	290 (4205)	3500	38.5 (10.17)	500	5.22 (1.38)	50.2 (1.976)	104.6 (4.118)	2.70 (5.95)	
2SP A14	14 (0.85)	250 (3625)	270 (3915)	290 (4205)	3500	49 (12.95)	500	6.65 (1.76)	52.7 (2.075)	109.6 (4.315)	2.80 (6.17)	
2SP A16	16.5 (1.01)	230 (3335)	240 (3480)	250 (3625)	3500	57.7 (15.24)	500	7.83 (2.07)	54.8 (2.157)	113.8 (4.480)	2.95 (6.51)	
2SP A19	19.5 (1.19)	210 (3045)	220 (3190)	230 (3335)	3300	64.3 (16.99)	500	9.26 (2.45)	57.3 (2.256)	118.8 (4.677)	3.10 (6.84)	
2SP A22	22.5 (1.37)	190 (2755)	200 (2900)	210 (3045)	2800	63 (16.64)	500	10.68 (2.82)	59.8 (2.354)	123.8 (4.874)	3.25 (7.17)	
2SP A26	26 (1.59)	170 (2465)	180 (2610)	190 (2755)	2500	65 (17.17)	500	12.35 (3.26)	62.7 (2.469)	129.6 (5.102)	3.40 (7.50)	

* Value collected during the testing at 1500 rpm



Example of ordering code

2SP	A	14	D		(H)	-	10	G	(VT)
-----	---	----	---	--	-----	---	----	---	------

2SP	Pump type	see table
A	Flange and cover	A = Aluminium
14	Displacement	see table
D	Clockwise rotation	D = Clockwise rotation S = Anticlockwise rotation
— ⁽¹⁾	Flange type	
(H)	Stiffening seal for low suction pressure	(optional)
—		
10	Shaft type	10 - 11 - 12 - 13 - 14 - 15 - 16
G	Connections type	G - N - T - M - U - W - F
(VT)	Optional	(VT) Viton seals (optional) VLP-I (N) - VLP-E (N) Pressure relief valve (page A-49)

⁽¹⁾ It is not necessary to indicate STANDARD flange

Conn Port Connections

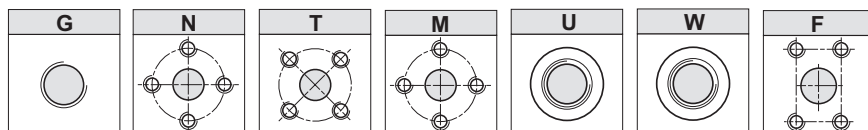




The sign on the body identifies the suction side for the pumps.

Rotation	
D	S








PUMPS GROUP 2 • STANDARD

Flange and cover in Aluminium

Dimensions

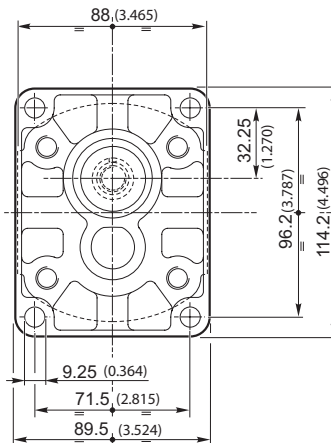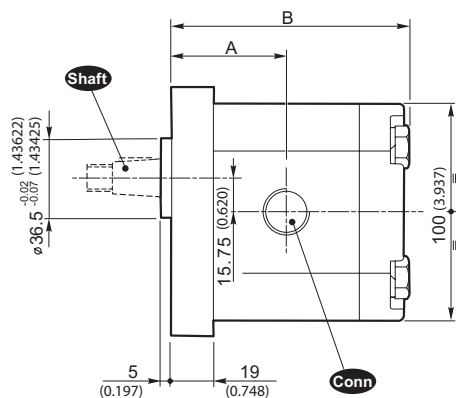

Shaft Available shafts

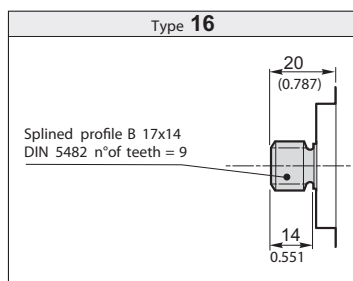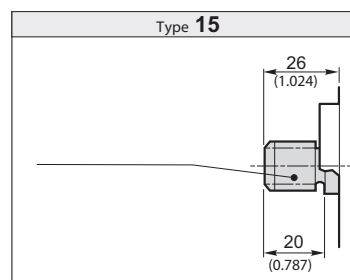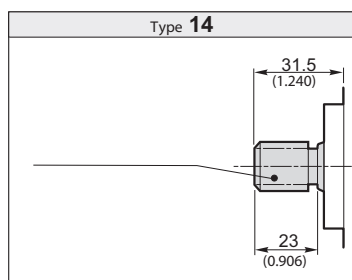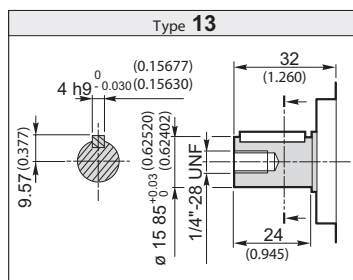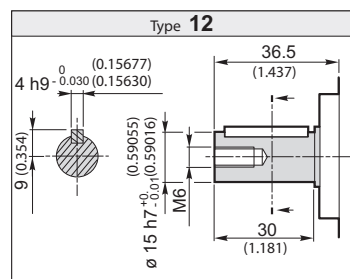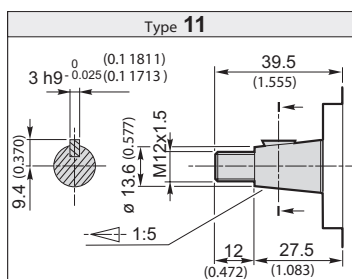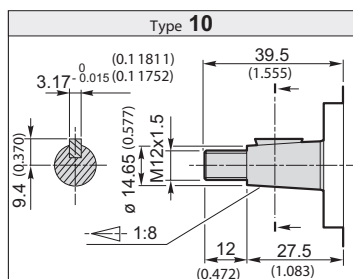

PUMPS GROUP 2 • STANDARD



Flange and cover in Cast iron

Technical data

Size	Displacement	Max. working pressure			Max. speed	Max. flow	Min. speed	Min. flow	Dimensions		Mass	Min. volumetric efficiency
	[cm³/rev] (in³/rev)	P1 [bar] (PSI)	P2 [bar] (PSI)	P3 [bar] (PSI)	[g/min] (rpm)	[lt/min] (Gal/min)	[g/min] (rpm)	[lt/min] (Gal/min)	A [mm] (inch)	B [mm] (inch)	[Kg] (lbs)	%
2SP G4	4 (0.24)	280 (4060)	300 (4350)	320 (4640)	4000	16 (4.23)	500	1.9 (0.50)	44.4 (1.748)	93 (3.661)	3.40 (7.50)	95*
2SP G6	6 (0.37)	280 (4060)	300 (4350)	320 (4640)	4000	24 (6.34)	500	2.85 (0.75)	46 (1.811)	96.3 (3.791)	3.55 (7.83)	
2SP G8	8.5 (0.52)	280 (4060)	300 (4350)	320 (4640)	3500	29.7 (7.85)	500	4.03 (1.06)	48.1 (1.894)	100.5 (3.957)	3.70 (8.16)	
2SP G11	11 (0.67)	280 (4060)	300 (4350)	320 (4640)	3500	38.5 (10.17)	500	5.22 (1.38)	50.2 (1.976)	104.6 (4.118)	3.80 (8.38)	
2SP G14	14 (0.85)	270 (3915)	280 (4060)	290 (4205)	3500	49 (12.95)	500	6.65 (1.76)	52.7 (2.075)	109.6 (4.315)	3.90 (8.60)	
2SP G16	16.5 (1.01)	230 (3335)	240 (3480)	250 (3625)	3500	57.7 (15.24)	500	7.83 (2.07)	54.8 (2.157)	113.8 (4.480)	4.05 (8.93)	
2SP G19	19.5 (1.19)	210 (3045)	220 (3190)	230 (3335)	3300	64.3 (16.99)	500	9.26 (2.45)	57.3 (2.256)	118.8 (4.677)	4.20 (9.26)	
2SP G22	22.5 (1.37)	190 (2755)	200 (2900)	210 (3045)	2800	63 (16.64)	500	10.68 (2.82)	59.8 (2.354)	123.8 (4.874)	4.35 (9.59)	
2SP G26	26 (1.59)	170 (2465)	180 (2610)	190 (2755)	2500	65 (17.17)	500	12.35 (3.26)	62.7 (2.469)	129.6 (5.102)	4.50 (9.92)	

* Value collected during the testing at 1500 rpm)



Example of ordering code

2SP	G	14	D		(H)	-	10	G	(VT)
-----	---	----	---	--	-----	---	----	---	------

2SP	Pump type	see table
G	Flange and cover	G = Cast iron
14	Displacement	see table
D	Clockwise rotation	D = Clockwise rotation S = Anticlockwise rotation
— ⁽¹⁾	Flange type	
(H)	Stiffening seal for low suction pressure	(optional)
—		
10	Shaft type	10 - 11 - 12 - 13 - 14 - 15 - 16
G	Connections type	G - N - T - M - U - W - F
(VT)	Optional	(VT) Viton seals (optional) VLP-I (N) - VLP-E (N) Pressure relief valve (page A-49)

⁽¹⁾ It is not necessary to indicate STANDARD flange

Conn Port Connections

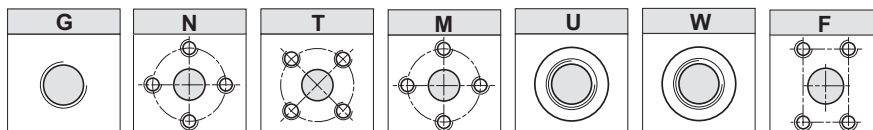

The sign on the body identifies the **suction side** for the pumps.


Rotation	
D	S

PUMPS GROUP 2 • STANDARD




Flange and cover in Cast iron


Dimensions

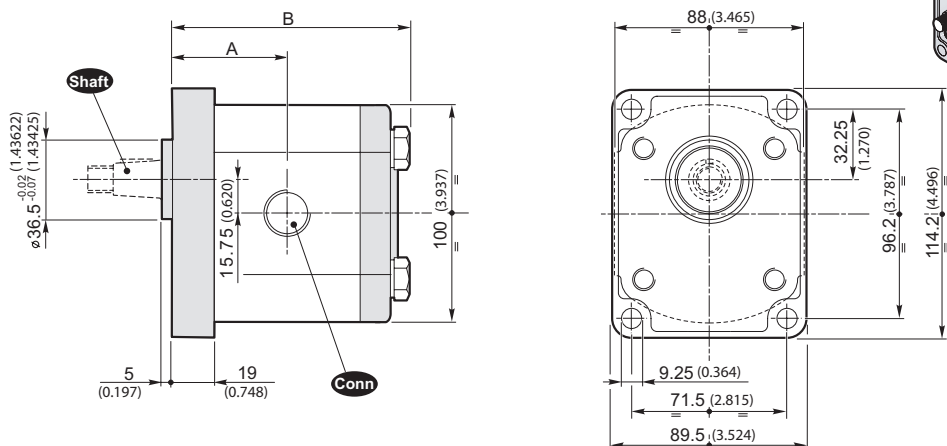


Shaft Available shafts

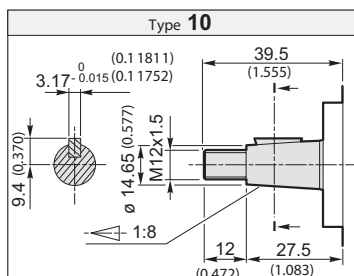


Torque 98 Nm / 72.3 ft-lbs

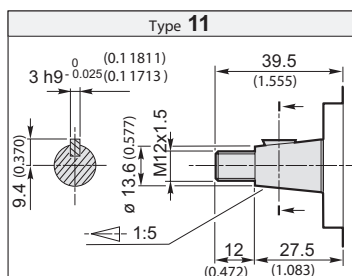


Torque 98 Nm / 72.3 ft-lbs

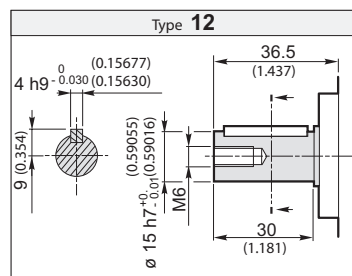


Torque 98 Nm / 72.3 ft-lbs

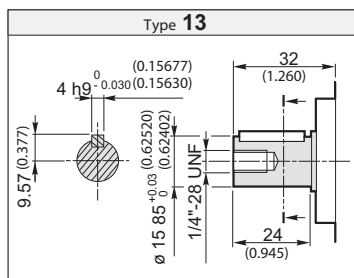


Torque 98 Nm / 72.3 ft-lbs

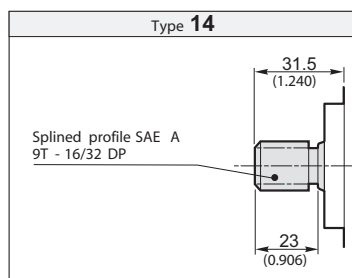

Torque 98 Nm / 72.3 ft-lbs

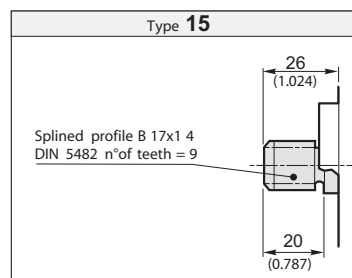

Torque 98 Nm / 72.3 ft-lbs

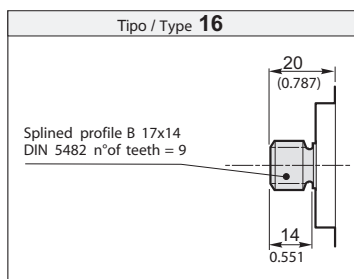

Torque 98 Nm / 72.3 ft-lbs

SEE PAGE 269 FOR PORT SIZES AVAILABLE

PUMPS GROUP 2 • SAE A, SAE A-OR



Technical data

Flange and cover in Aluminium

Size	Displacement	Max. working pressure			Max. speed	Max. flow	Min. speed	Min. flow	Dimensions		Mass	Min. volumetric efficiency
	[cm³/rev] [in³/rev]	P1 [bar] (PSI)	P2 [bar] (PSI)	P3 [bar] (PSI)	[g/min] (rpm)	[lt/min] (Gal/min)	[g/min] (rpm)	[lt/min] (Gal/min)	A [mm] (inch)	B [mm] (inch)	[Kg] (lbs)	%
2SP A4	4 (0.24)	250 (3625)	270 (3915)	290 (4205)	4000	16 (4.23)	500	1.9 (0.50)	44.4 (1.748)	93 (3.661)	2.30 (5.07)	95*
2SP A6	6 (0.37)	250 (3625)	270 (3915)	290 (4205)	4000	24 (6.34)	500	2.85 (0.75)	46 (1.811)	96.3 (3.791)	2.45 (5.40)	
2SP A8	8.5 (0.52)	250 (3625)	270 (3915)	290 (4205)	3500	29.7 (7.85)	500	4.03 (1.06)	48.1 (1.894)	100.5 (3.957)	2.60 (5.73)	
2SP A11	11 (0.67)	250 (3625)	270 (3915)	290 (4205)	3500	38.5 (10.17)	500	5.22 (1.38)	50.2 (1.976)	104.6 (4.118)	2.70 (5.95)	
2SP A14	14 (0.85)	250 (3625)	270 (3915)	290 (4205)	3500	49 (12.95)	500	6.65 (1.76)	52.7 (2.075)	109.6 (4.315)	2.80 (6.17)	
2SP A16	16.5 (1.01)	230 (3335)	240 (3480)	250 (3625)	3500	57.7 (15.24)	500	7.83 (2.07)	54.8 (2.157)	113.8 (4.480)	2.95 (6.51)	
2SP A19	19.5 (1.19)	210 (3045)	220 (3190)	230 (3335)	3300	64.3 (16.99)	500	9.26 (2.45)	57.3 (2.256)	118.8 (4.677)	3.10 (6.84)	
2SP A22	22.5 (1.37)	190 (2755)	200 (2900)	210 (3045)	2800	63 (16.64)	500	10.68 (2.82)	59.8 (2.354)	123.8 (4.874)	3.25 (7.17)	
2SP A26	26 (1.59)	170 (2465)	180 (2610)	190 (2755)	2500	65 (17.17)	500	12.35 (3.26)	62.7 (2.469)	129.6 (5.102)	3.40 (7.50)	


* Value collected during the testing at 1500 rpm)

Example of ordering code

2SP	A	14	D	SAE A	(H)	-	10	G	(VT)
-----	---	----	---	-------	-----	---	----	---	------

2SP	Pump type	see table
A	Flange and cover	A = Aluminium
14	Displacement	see table
D	Clockwise rotation	D = Clockwise rotation S = Anticlockwise rotation
SAE A	Flange type	SAE A - SAE A-OR
(H)	Stiffening seal for low suction pressure	(optional)
-		
10	Shaft type	10 - 11 - 12 - 13 - 14 - 15 - 16
G	Connections type	G - N - T - M - U - W - F
(VT)	Optional	(VT) Viton seals (optional) VLP-I (N) - VLP-E (N) Pressure relief valve (page A-49)

Conn Port Connections

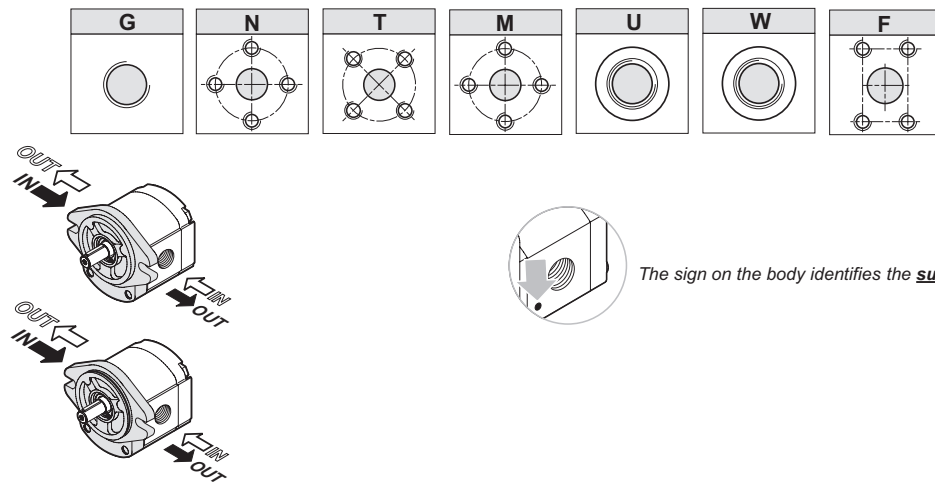


The sign on the body identifies the **suction side** for the pumps.

Rotation	
D	S


PUMPS GROUP 2 • SAE A, SAE A-OR

Flange and cover in Aluminium


Dimensions

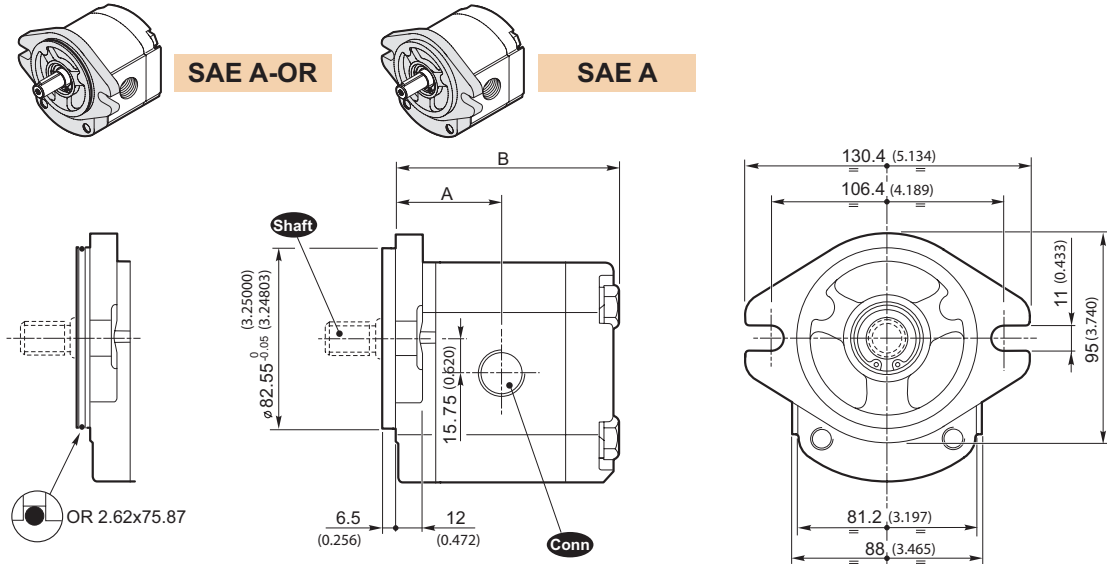


Shaft Available shafts




Torque 98 Nm / 72.3 ft-lbs




Torque 98 Nm / 72.3 ft-lbs

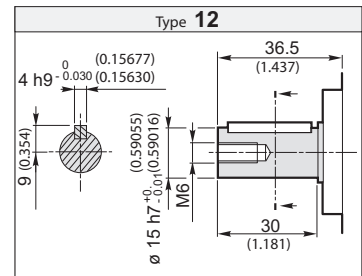


Torque 98 Nm / 72.3 ft-lbs




Torque 98 Nm / 72.3 ft-lbs



Torque 98 Nm / 72.3 ft-lbs

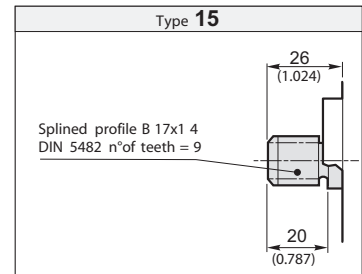

Torque 98 Nm / 72.3 ft-lbs



Torque 98 Nm / 72.3 ft-lbs

PUMPS GROUP 2 • SAE A, SAE A-OR



Technical data

Flange and cover in Cast iron

Size	Displacement	Max. working pressure			Max. speed	Max. flow	Min. speed	Min. flow	Dimensions		Mass	Min. volumetric efficiency
	[cm³/rev] (in³/rev)	P1 [bar] (PSI)	P2 [bar] (PSI)	P3 [bar] (PSI)	[g/min] (rpm)	[l/min] (Gal/min)	[g/min] (rpm)	[l/min] (Gal/min)	A [mm] (inch)	B [mm] (inch)	[Kg] (lbs)	%
2SP G4	4 (0.24)	280 (4060)	300 (4350)	320 (4640)	4000	16 (4.23)	500	1.9 (0.50)	44.4 (1.748)	93 (3.661)	3.40 (7.50)	95*
2SP G6	6 (0.37)	280 (4060)	300 (4350)	320 (4640)	4000	24 (6.34)	500	2.85 (0.75)	46 (1.811)	96.3 (3.791)	3.55 (7.83)	
2SP G8	8.5 (0.52)	280 (4060)	300 (4350)	320 (4640)	3500	29.7 (7.85)	500	4.03 (1.06)	48.1 (1.894)	100.5 (3.957)	3.70 (8.16)	
2SP G11	11 (0.67)	280 (4060)	300 (4350)	320 (4640)	3500	38.5 (10.17)	500	5.22 (1.38)	50.2 (1.976)	104.6 (4.118)	3.80 (8.38)	
2SP G14	14 (0.85)	270 (3915)	280 (4060)	290 (4205)	3500	49 (12.95)	500	6.65 (1.76)	52.7 (2.075)	109.6 (4.315)	3.90 (8.60)	
2SP G16	16.5 (1.01)	230 (3335)	240 (3480)	250 (3625)	3500	57.7 (15.24)	500	7.83 (2.07)	54.8 (2.157)	113.8 (4.480)	4.05 (8.93)	
2SP G19	19.5 (1.19)	210 (3045)	220 (3190)	230 (3335)	3300	64.3 (16.99)	500	9.26 (2.45)	57.3 (2.256)	118.8 (4.677)	4.20 (9.26)	
2SP G22	22.5 (1.37)	190 (2755)	200 (2900)	210 (3045)	2800	63 (16.64)	500	10.68 (2.82)	59.8 (2.354)	123.8 (4.874)	4.35 (9.59)	
2SP G26	26 (1.59)	170 (2465)	180 (2610)	190 (2755)	2500	65 (17.17)	500	12.35 (3.26)	62.7 (2.469)	129.6 (5.102)	4.50 (9.92)	

* Value collected during the testing at 1500 rpm)



Example of ordering code

2SP	G	14	D	SAE A	(H)	-	14	G	(VT)
-----	---	----	---	-------	-----	---	----	---	------

2SP	Pump type	see table
G	Flange and cover	G = Cast iron
14	Displacement (see table)	see table
D	Clockwise rotation	D = Clockwise rotation S = Anticlockwise rotation
SAE A	Flange type	SAE A - SAE A-OR
(H)	Stiffening seal for low suction pressure (optional)	(optional)
—		
14	Shaft type	10 - 11 - 12 - 13 - 14 - 15 - 16
G	Connections type	G - N - T - M - U - W - F
(VT)	Optional	(VT) Viton seals (optional) VLP-I (N) - VLP-E (N) Pressure relief valve (page A-49)

Conn

Port Connections

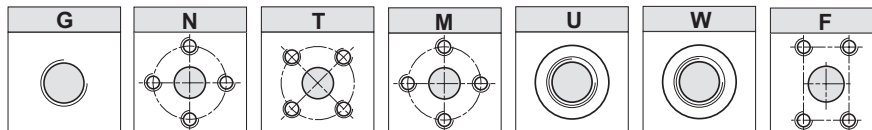


The sign on the body identifies the **suction side** for the pumps.

Rotation	
D	S


PUMPS GROUP 2 • SAE A, SAE A-OR

Flange and cover in Cast iron


Dimensions










SAE A-OR



SAE A

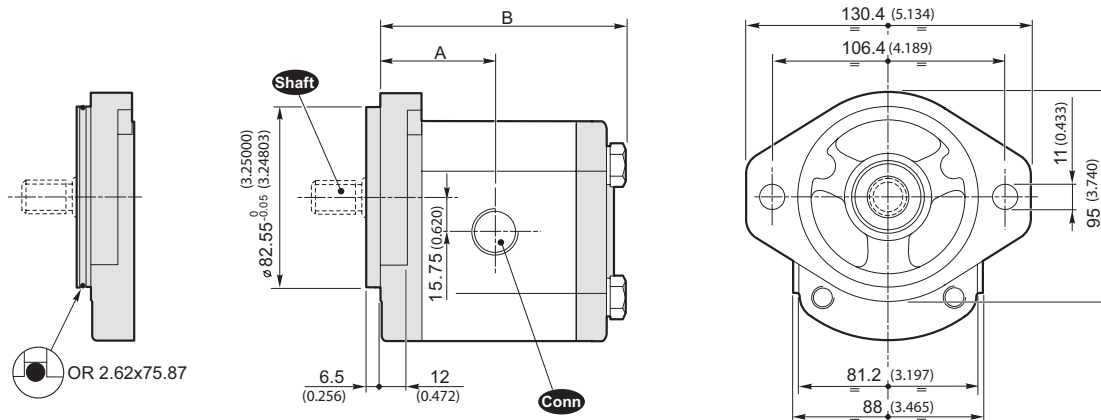

Shaft Available shafts

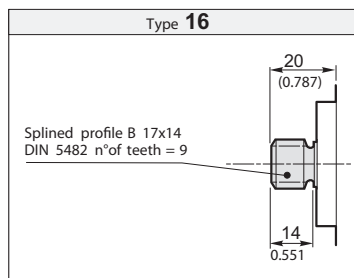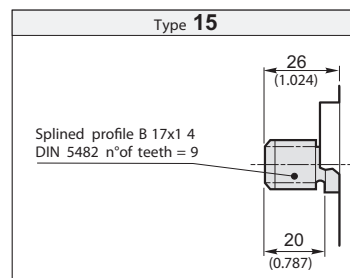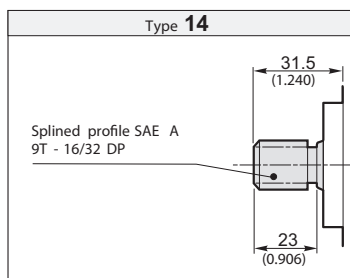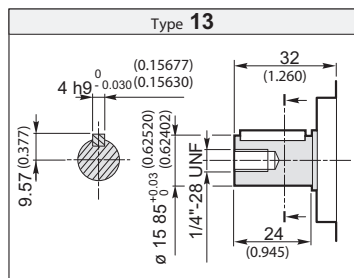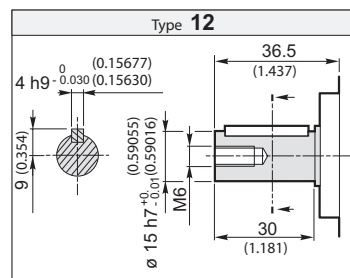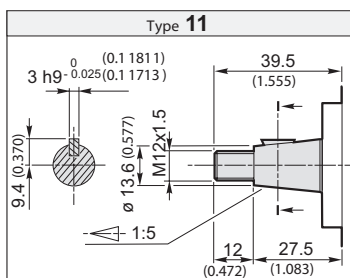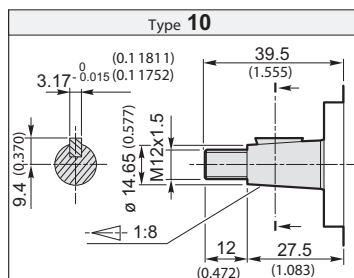

PUMPS GROUP 2 • B80C



Technical data

Size	Displacement [cm³/rev] [in³/rev]	Max. working pressure			Max. speed [g/min] [rpm]	Max. flow [lt/min] [Gal/min]	Min. speed [g/min] [rpm]	Min. flow [lt/min] [Gal/min]	Dimensions		Mass [Kg] [lbs]	Min. volumetric efficiency %
		P1 [bar] [PSI]	P2 [bar] [PSI]	P3 [bar] [PSI]					A [mm] [inch]	B [mm] [inch]		
2SP A4	4 (0.24)	250 (3625)	270 (3915)	290 (4205)	4000	16 (4.23)	500	1.9 (0.50)	46.4 1.827	95 3.740	2.30 (5.07)	95*
2SP A6	6 (0.37)	250 (3625)	270 (3915)	290 (4205)	4000	24 (6.34)	500	2.85 (0.75)	48 1.890	98.3 3.870	2.45 (5.40)	
2SP A8	8.5 (0.52)	250 (3625)	270 (3915)	290 (4205)	3500	29.7 (7.85)	500	4.03 (1.06)	50.1 1.972	102.5 4.035	2.60 (5.73)	
2SP A11	11 (0.67)	250 (3625)	270 (3915)	290 (4205)	3500	38.5 (10.17)	500	5.22 (1.38)	52.2 2.055	106.6 4.197	2.70 (5.95)	
2SP A14	14 (0.85)	250 (3625)	270 (3915)	290 (4205)	3500	49 (12.95)	500	6.65 (1.76)	54.7 2.154	111.6 4.394	2.80 (6.17)	
2SP A16	16.5 (1.01)	230 (3335)	240 (3480)	250 (3625)	3500	57.7 (15.24)	500	7.83 (2.07)	56.8 2.236	115.8 4.559	2.95 (6.51)	
2SP A19	19.5 (1.19)	210 (3045)	220 (3190)	230 (3335)	3300	64.3 (16.99)	500	9.26 (2.45)	59.3 2.335	120.8 4.756	3.10 (6.84)	
2SP A22	22.5 (1.37)	190 (2755)	200 (2900)	210 (3045)	2800	63 (16.64)	500	10.68 (2.82)	61.8 2.433	125.8 4.953	3.25 (7.17)	
2SP A26	26 (1.59)	170 (2465)	180 (2610)	190 (2755)	2500	65 (17.17)	500	12.35 (3.26)	64.7 2.547	131.6 5.181	3.40 (7.50)	




* Value collected during the testing at 1500 rpm)

Example of ordering code

2SP | A | 14 | D | (H) | - | 10 | G | (VT)

2SP	Pump type	see table
A	Flange and cover	A = Aluminium
14	Displacement	see table
D	Clockwise rotation	D = Clockwise rotation
	Flange type	S = Anticlockwise rotation
		B80C
(H)	Stiffening seal for low suction pressure	(optional)
—		
10	Shaft type	10 - 11 - 12 - 13 - 14 - 15 - 16
G	Connections type	G - N - T - M - U - W - F
(VT)	Optional	(VT) Viton seals (optional) VLP-I (N) - VLP-E (N) Pressure relief valve (page A-49)

Conn Port Connections

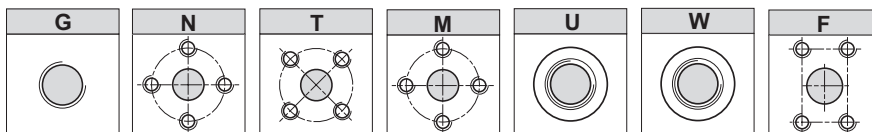




The sign on the body identifies the suction side for the pumps.

Rotation	
D	S


PUMPS GROUP 2 • B80C




Dimensions

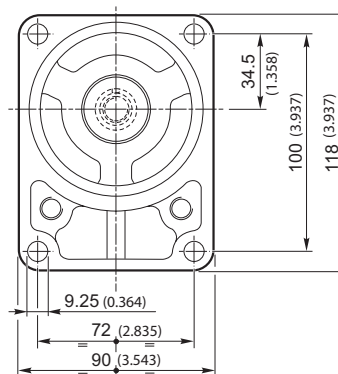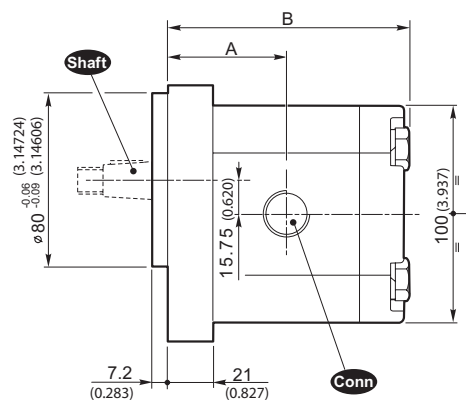


Shaft Available shafts

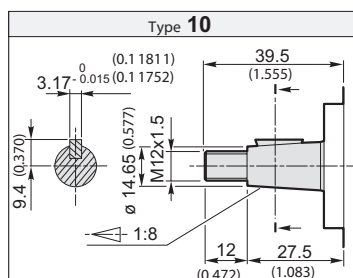


Torque **98 Nm / 72.3 ft-lbs**




Torque 98 Nm / 72.3 ft-lbs

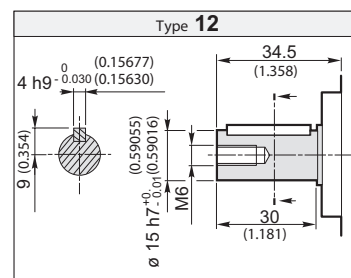


Torque **98 Nm / 72.3 ft-lbs**

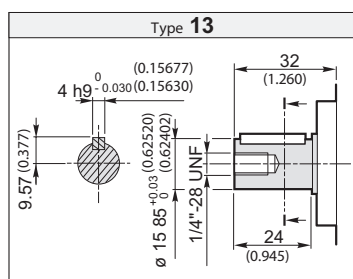


Torque 98 Nm / 72.3 ft-lbs



Torque 98 Nm / 72.3 ft-lbs

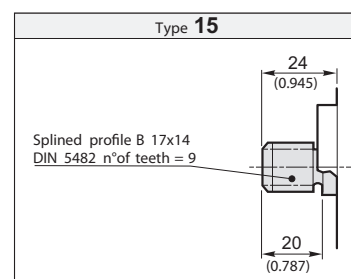

Torque 98 Nm / 72.3 ft-lbs

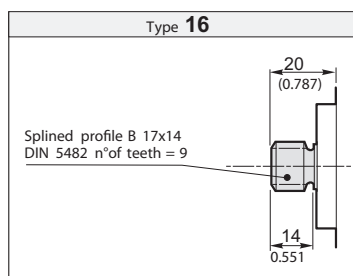

Torque 98 Nm / 72.3 ft·lbs

PUMPS GROUP 2 • B50C



Technical data

Size	Displacement [cm³/rev] (in³/rev)	Max. working pressure			Max. speed [g/min] (rpm)	Max. flow [l/min] (Gal/min)	Min. speed [g/min] (rpm)	Min. flow [l/min] (Gal/min)	Dimensions				Mass [Kg] (lbs)	Min. volumetric efficiency %
		P1 [bar] (PSI)	P2 [bar] (PSI)	P3 [bar] (PSI)					A [mm] (inch)	B [mm] (inch)	C [mm] (inch)	L 1 [mm] (inch)		
2SP A4	4 (0.24)	250 (3625)	270 (3915)	290 (4205)	4000	16 (4.23)	500	1.9 (0.50)	44.4 (1.748)	93 (3.661)	84 (3.307)	105 (4.134)	2.30 (5.07)	95*
2SP A6	6 (0.37)	250 (3625)	270 (3915)	290 (4205)	4000	24 (6.34)	500	2.85 (0.75)	46 (1.811)	96.3 (3.791)	87.3 (3.437)	105 (4.134)	2.45 (5.40)	
2SP A8	8.5 (0.52)	250 (3625)	270 (3915)	290 (4205)	3500	29.7 (7.85)	500	4.03 (1.06)	48.1 (1.894)	100.5 (3.957)	91.5 (3.602)	110 (4.331)	2.60 (5.73)	
2SP A11	11 (0.67)	250 (3625)	270 (3915)	290 (4205)	3500	38.5 (10.17)	500	5.22 (1.38)	50.2 (1.976)	104.6 (4.118)	95.6 (3.764)	115 (4.528)	2.70 (5.95)	
2SP A14	14 (0.85)	250 (3625)	270 (3915)	290 (4205)	3500	49 (12.95)	500	6.65 (1.76)	52.7 (2.075)	109.6 (4.315)	100.6 (3.961)	120 (4.724)	2.80 (6.17)	
2SP A16	16.5 (1.01)	230 (3335)	240 (3480)	250 (3625)	3500	57.7 (15.24)	500	7.83 (2.07)	54.8 (2.157)	113.8 (4.480)	104.8 (4.126)	125 (4.921)	2.95 (6.51)	
2SP A19	19.5 (1.19)	210 (3045)	220 (3190)	230 (3335)	3300	64.3 (16.99)	500	9.26 (2.45)	57.3 (2.256)	118.8 (4.677)	109.8 (4.323)	130 (5.118)	3.10 (6.84)	
2SP A22	22.5 (1.37)	190 (2755)	200 (2900)	210 (3045)	2800	63 (16.64)	500	10.68 (2.82)	59.8 (2.354)	123.8 (4.874)	114.8 (4.520)	135 (5.315)	3.25 (7.17)	
2SP A26	26 (1.59)	170 (2465)	180 (2610)	190 (2755)	2500	65 (17.17)	500	12.35 (3.26)	62.7 (2.469)	129.6 (5.102)	120.6 (4.748)	140 (5.512)	3.40 (7.50)	


* Value collected during the testing at 1500 rpm)

Example of ordering code

2SP A 14 D (H) - 10 G (VT)



2SP	Pump type	see table
A	Flange and cover	A = Aluminium
14	Displacement	see table
D	Clockwise rotation	D = Clockwise rotation S = Anticlockwise rotation
	Flange type	B50CX - B50CY
(H)	Stiffening seal for low suction pressure	(optional)
—		
10	Shaft type	10 - 11 - 12 - 13 - 14 - 15 - 16
G	Connections type	G - N - T - M - U - W - F
(VT)	Optional	(VT) Viton seals (optional) VLP-I (N) - VLP-E (N) Pressure relief valve (page A-49)

Port Connections

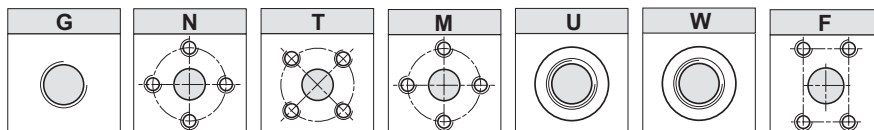

Version
B50CX

Version
B50CY




The sign on the body identifies the suction side for the pumps.








Rotation	
D	S

PUMPS GROUP 2 • B50C

Dimensions

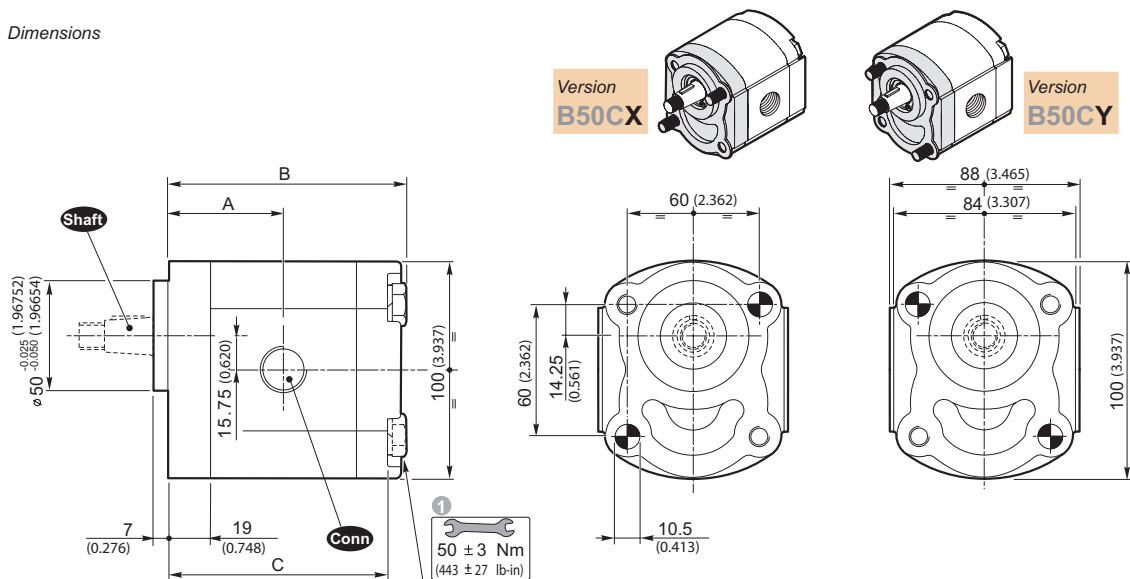

Available shafts

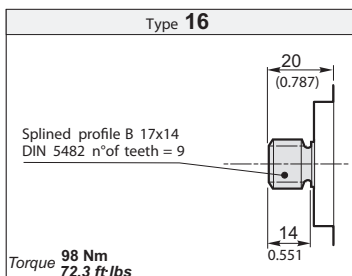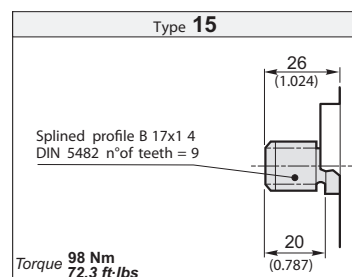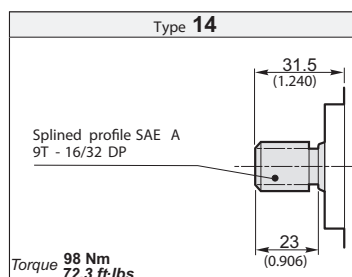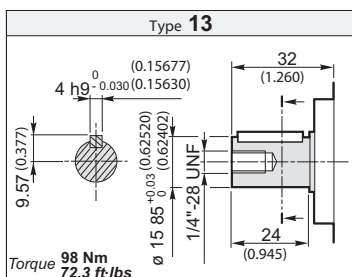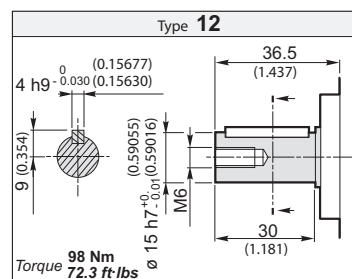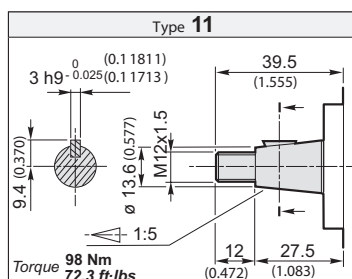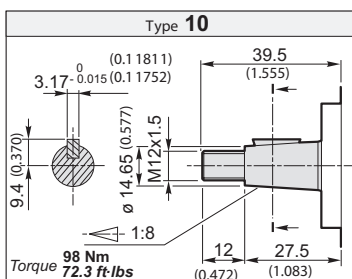

1 Tightening torque of screws: 443 ± 27 lb-in. Use screws type 10.9 - 12.9 UNI EN 20898/1.

The assembling of the pump should be effected with 2 screw studs type 10.9 - 12.9 pre-tighten at 354 ± 27 lb-in. Fix the pump by self-locking nuts with tightening torque 443 ± 27 lb-in.

The screws kit for the pump assembling should be ordered separately. Ordering code of fixing Kit:

0029W + Lenght L (see table)

PUMPS GROUP 2 • E52C



Technical data

Size	Displacement [cm³/rev] (in³/rev)	Max. working pressure			Max. speed [g/min] (rpm)	Max. flow [lt/min] (Gal/min)	Min. speed [g/min] (rpm)	Min. flow [lt/min] (Gal/min)	Dimensions				Mass [Kg] (lbs)	Min. volumetric efficiency %
		P1 [bar] (PSI)	P2 [bar] (PSI)	P3 [bar] (PSI)					A [mm] (inch)	B [mm] (inch)	C [mm] (inch)	L 1 [mm] (inch)		
2SP A4	4 (0.24)	250 (3625)	270 (3915)	290 (4205)	4000	16 (4.23)	500	1.9 (0.50)	41.7 (1.642)	90.3 (3.555)	81.3 (3.201)	100 (3.937)	2.30 (5.07)	95*
2SP A6	6 (0.37)	250 (3625)	270 (3915)	290 (4205)	4000	24 (6.34)	500	2.85 (0.75)	43.3 (1.705)	93.6 (3.685)	84.6 (3.331)	105 (4.134)	2.45 (5.40)	
2SP A8	8.5 (0.52)	250 (3625)	270 (3915)	290 (4205)	3500	29.7 (7.85)	500	4.03 (1.06)	45.4 (1.787)	97.8 (3.850)	88.8 (3.496)	110 (4.331)	2.60 (5.73)	
2SP A11	11 (0.67)	250 (3625)	270 (3915)	290 (4205)	3500	38.5 (10.17)	500	5.22 (1.38)	47.5 (1.870)	101.9 (4.012)	92.9 (3.657)	115 (4.528)	2.70 (5.95)	
2SP A14	14 (0.85)	250 (3625)	270 (3915)	290 (4205)	3500	49 (12.95)	500	6.65 (1.76)	50 (1.969)	106.9 (4.209)	97.9 (3.854)	120 (4.724)	2.80 (6.17)	
2SP A16	16.5 (1.01)	230 (3335)	240 (3480)	250 (3625)	3500	57.7 (15.24)	500	7.83 (2.07)	52.1 (2.051)	111.1 (4.374)	102.1 (4.020)	120 (4.724)	2.95 (6.51)	
2SP A19	19.5 (1.19)	210 (3045)	220 (3190)	230 (3335)	3300	64.3 (16.99)	500	9.26 (2.45)	54.6 (2.150)	116.1 (4.571)	107.1 (4.217)	125 (4.921)	3.10 (6.84)	
2SP A22	22.5 (1.37)	190 (2755)	200 (2900)	210 (3045)	2800	63 (16.64)	500	10.68 (2.82)	57.1 (2.248)	121.1 (4.768)	112.1 (4.413)	130 (5.118)	3.25 (7.17)	
2SP A26	26 (1.59)	170 (2465)	180 (2610)	190 (2755)	2500	65 (17.17)	500	12.35 (3.26)	60 (2.362)	126.9 (4.996)	117.9 (4.642)	140 (5.512)	3.40 (7.50)	


* Value collected during the testing at 1500 rpm)

Example of ordering code


2SP | A | 14 | D | E52CX | (H) | - | 10 | G | (VT)

2SP	Pump type	see table
A	Flange and cover	A = Aluminium
14	Displacement	see table
D	Clockwise rotation	D = Clockwise rotation S = Anticlockwise rotation
E52CX	Flange type	E52CX - E52CY
(H)	Stiffening seal for low suction pressure	(optional)
—		
10	Shaft type	17
G	Connections type	G - N - T - M - U - W - F
(VT)	Optional	(VT) Viton seals (optional) VLP-I (N) - VLP-E (N) Pressure relief valve (page A-49)

Conn Port Connections

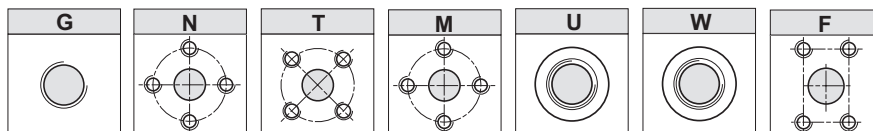


Version
E52CX



The sign on the body identifies the **suction side** for the pumps.


Version
E52CY




Rotation	
D	S

PUMPS GROUP 2 • E52C

Dimensions

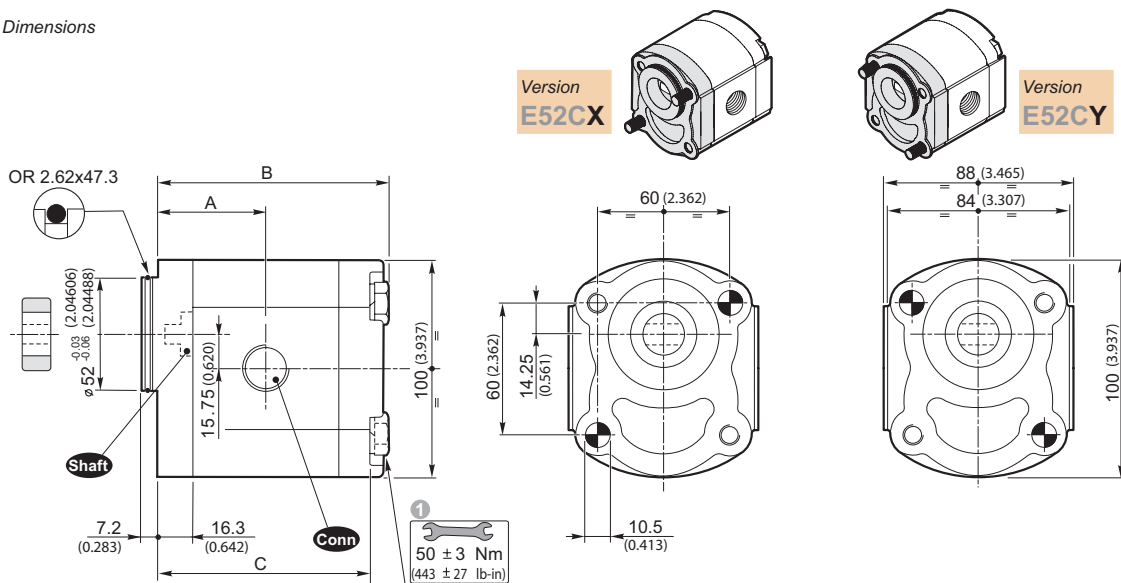

Shaft Available shafts

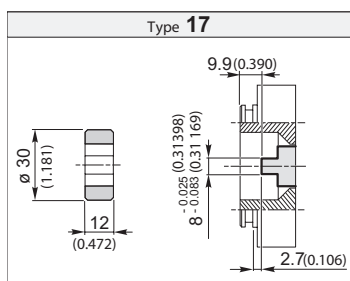

Torque 70 Nm / 51.6 ft-lbs

1 Tightening torque of screws: 443 $\pm$ 27 lb-in. Use screws type 10.9 - 12.9 UNI EN 20898/1.

The assembling of the pump should be effected with 2 screw studs type 10.9 - 12.9 pre-tighten at 354 $\pm$ 27 lb-in. Fix the pump by self-locking nuts with tightening torque 443 $\pm$ 27 lb-in.

The screws kit for the pump assembling should be ordered separately. Ordering code of fixing Kit:

0029W + Length L (see table)

PUMPS GROUP 2 • PRKS 400 D



Technical data

Size	Displacement [cm³/rev] (in³/rev)	Max. working pressure			Max. speed [g/min] (rpm)	Max. flow [lt/min] (Gal/min)	Min. speed [g/min] (rpm)	Min. flow [lt/min] (Gal/min)	Dimensions		Mass [Kg] (lbs)	Min. volumetric efficiency %
		P1 [bar] (PSI)	P2 [bar] (PSI)	P3 [bar] (PSI)					A [mm] (inch)	B [mm] (inch)		
2SP A4	4 (0.24)	250 (3625)	270 (3915)	290 (4205)	4000	16 (4.23)	500	1.9 (0.50)	44.4 (1.748)	93 (3.661)	2.30 (5.07)	95*
2SP A6	6 (0.37)	250 (3625)	270 (3915)	290 (4205)	4000	24 (6.34)	500	2.85 (0.75)	46 (1.811)	96.3 (3.791)	2.45 (5.40)	
2SP A8	8.5 (0.52)	250 (3625)	270 (3915)	290 (4205)	3500	29.7 (7.85)	500	4.03 (1.06)	48.1 (1.894)	100.5 (3.957)	2.60 (5.73)	
2SP A11	11 (0.67)	250 (3625)	270 (3915)	290 (4205)	3500	38.5 (10.17)	500	5.22 (1.38)	50.2 (1.976)	104.6 (4.118)	2.70 (5.95)	
2SP A14	14 (0.85)	250 (3625)	270 (3915)	290 (4205)	3500	49 (12.95)	500	6.65 (1.76)	52.7 (2.075)	109.6 (4.315)	2.80 (6.17)	
2SP A16	16.5 (1.01)	230 (3335)	240 (3480)	250 (3625)	3500	57.7 (15.24)	500	7.83 (2.07)	54.8 (2.157)	113.8 (4.480)	2.95 (6.51)	
2SP A19	19.5 (1.19)	210 (3045)	220 (3190)	230 (3335)	3300	64.3 (16.99)	500	9.26 (2.45)	57.3 (2.256)	118.8 (4.677)	3.10 (6.84)	
2SP A22	22.5 (1.37)	190 (2755)	200 (2900)	210 (3045)	2800	63 (16.64)	500	10.68 (2.82)	59.8 (2.354)	123.8 (4.874)	3.25 (7.17)	
2SP A26	26 (1.59)	170 (2465)	180 (2610)	190 (2755)	2500	65 (17.17)	500	12.35 (3.26)	62.7 (2.469)	129.6 (5.102)	3.40 (7.50)	



* Value collected during the testing at 1500 rpm)

Example of ordering code

2SP | A | 14 | D | PRKS 400 D | - | G

2SP	Pump type	see table
A	Flange and cover	A = Aluminium
14	Displacement	see table
D	Clockwise rotation	D = Clockwise rotation (usually supplied) S = Anticlockwise rotation
PRKS0400 D	Perkins flange	PRKS 400 D
—		
G	Connections type	G - N - T - M - U - W - F

Conn Port Connections

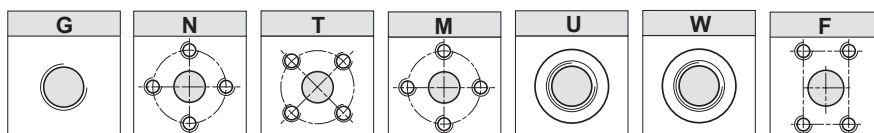



The sign on the body identifies the suction side for the pumps.

Rotation	
D	S


PUMPS GROUP 2 • PRKS 400 D



Dimensions

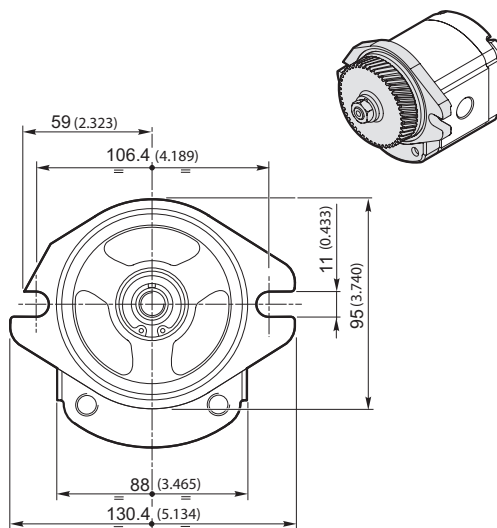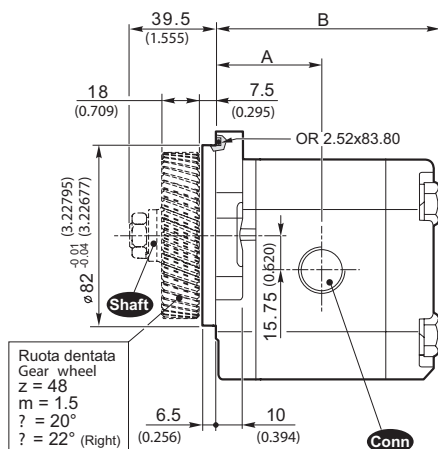

Shaft Available shafts

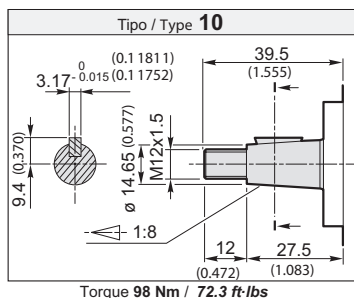

PUMPS GROUP 2 • SAE A 14* (z=10), SAE A 14** (z=11),



Technical data

SAE A 14* z = 10

Size	Displacement [cm ³ /rev] (in ³ /rev)	Max. working pressure			Max. speed [g/min] (rpm)	Max. flow [lt/min] (Gal/min)	Min. speed [g/min] (rpm)	Min. flow [lt/min] (Gal/min)	Dimensions		Mass [Kg] (lbs)	Min. volumetric efficiency %
		P1 [bar] (PSI)	P2 [bar] (PSI)	P3 [bar] (PSI)					A [mm] (inch)	B [mm] (inch)		
2SP ...8	8.5 (0.52)	250 (3625)	270 (3915)	290 (4205)	3500	29.7 (7.85)	500	4.03 (1.06)	48.1 (1.894)	100.5 (3.957)	2.65 (5.84)	95*
2SP ...11	11 (0.67)	250 (3625)	270 (3915)	290 (4205)	3500	38.5 (10.17)	500	5.22 (1.38)	50.2 (1.976)	104.6 (4.118)	2.75 (6.06)	
2SP ...26	26 (1.59)	170 (2465)	180 (2610)	190 (2755)	2500	65 (17.17)	500	12.35 (3.26)	62.7 (2.469)	129.6 (5.102)	3.45 (7.61)	

SAE A 14** z = 11

Size	Displacement [cm ³ /rev] (in ³ /rev)	Max. working pressure			Max. speed [rpm]	Max. flow [lt/min] (Gal/min)	Min. speed [rpm]	Min. flow [lt/min] (Gal/min)	Dimensions		Mass [Kg] (lbs)	Min. volumetric efficiency %
		P1 [bar] (PSI)	P2 [bar] (PSI)	P3 [bar] (PSI)					A [mm] (inch)	B [mm] (inch)		
2SP ...6	6 (0.37)	250 (3625)	270 (3915)	290 (4205)	4000	24 (6.34)	500	2.85 (0.75)	46 (1.811)	96.3 (3.791)	2.45 (5.40)	95*
2SP ...11	11 (0.67)	250 (3625)	270 (3915)	290 (4205)	3500	38.5 (10.17)	500	5.22 (1.38)	50.2 (1.976)	104.6 (4.118)	2.70 (5.95)	
2SP ...14	14 (0.85)	250 (3625)	270 (3915)	290 (4205)	3500	49 (12.95)	500	6.65 (1.76)	52.7 (2.075)	109.6 (4.315)	2.80 (6.17)	



* Value collected during the testing at 1500 rpm)

Example of ordering code

2SP | A | 26 | D | SAEA | - | 14* | G

2SP	Pump type	see table
A	Flange and cover	A = Aluminium G = Cast-iron flange and cover
26	Displacement	see table
D	Clockwise rotation	D = Clockwise rotation S = Anticlockwise rotation
SAEA	Flange type	SAE A
—		
14*	Shaft type	14* - 14**
G	Connections type	G - N - T - M - U - W - F

Conn Port Connections

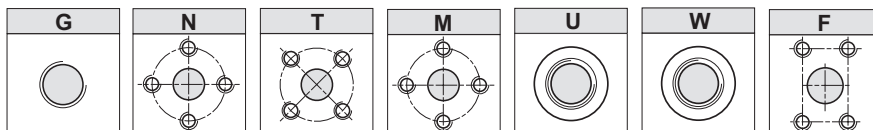




The sign on the body identifies the suction side for the pumps.

Rotation	
D	S


PUMPS GROUP 2 • SAE A 14* (z=10), SAE A 14** (z=11),




Dimensions

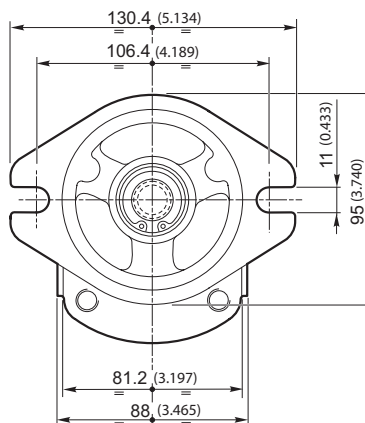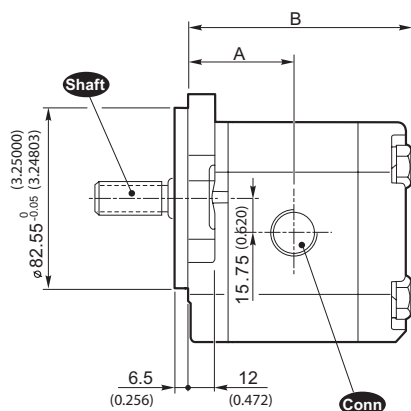

Shaft Available shafts

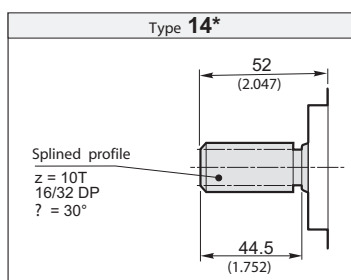

Torque 98 Nm / 72.3 ft·lbs



Torque 98 Nm / 72.3 ft-lbs

**SEE PAGE 269 FOR
PORT SIZES AVAILABLE**

PUMPS GROUP 2 • SUPP.STND



Version to use with axial and/or radial loads

Technical data

Size	Displacement [cm³/rev] (in³/rev)	Max. working pressure			Max. speed [g/min] (rpm)	Max. flow [lt/min] (Gal/min)	Min. speed [g/min] (rpm)	Min. flow [lt/min] (Gal/min)	Dimensions		Mass [Kg] (lbs)	Min. volumetric efficiency %
		P1 [bar] (PSI)	P2 [bar] (PSI)	P3 [bar] (PSI)					A [mm] (inch)	B [mm] (inch)		
2SP A4	4 (0.24)	250 (3625)	270 (3915)	290 (4205)	4000	16 (4.23)	500	1.9 (0.50)	64.4 (2.535)	113 (4.449)	2.8 (6.17)	95*
2SP A6	6 (0.37)	250 (3625)	270 (3915)	290 (4205)	4000	24 (6.34)	500	2.85 (0.75)	66 (2.598)	116.3 (4.579)	2.95 (6.50)	
2SP A8	8.5 (0.52)	250 (3625)	270 (3915)	290 (4205)	3500	29.7 (7.85)	500	4.03 (1.06)	68.1 (2.681)	120.5 (4.744)	3.1 (6.84)	
2SP A11	11 (0.67)	250 (3625)	270 (3915)	290 (4205)	3500	38.5 (10.17)	500	5.22 (1.38)	70.2 (2.764)	124.6 (4.906)	3.2 (7.06)	
2SP A14	14 (0.85)	250 (3625)	270 (3915)	290 (4205)	3500	49 (12.95)	500	6.65 (1.76)	72.7 (2.862)	129.6 (5.102)	3.3 (7.28)	
2SP A16	16.5 (1.01)	230 (3335)	240 (3480)	250 (3625)	3500	57.7 (15.24)	500	7.83 (2.07)	74.8 (2.945)	133.8 (5.268)	3.45 (7.61)	
2SP A19	19.5 (1.19)	210 (3045)	220 (3190)	230 (3335)	3300	64.3 (16.99)	500	9.26 (2.45)	77.3 (3.043)	138.8 (5.465)	3.6 (7.94)	
2SP A22	22.5 (1.37)	190 (2755)	200 (2900)	210 (3045)	2800	63 (16.64)	500	10.68 (2.82)	79.8 (3.142)	143.8 (5.661)	3.75 (8.27)	
2SP A26	26 (1.59)	170 (2465)	180 (2610)	190 (2755)	2500	65 (17.17)	500	12.35 (3.26)	82.7 (3.256)	149.6 (5.890)	3.9 (8.60)	

* Value collected during the testing at 1500 rpm)



Example of ordering code

2SP	A	14	D	SUPP.STND	-	10	G	(VT)
-----	---	----	---	-----------	---	----	---	------

2SP	Pump type	see table
A	Flange and cover	A = Aluminium
14	Displacement	see table
D	Clockwise rotation	D = Clockwise rotation
S	Anticlockwise rotation	S = Anticlockwise rotation
SUPP.STND	Support type	SUPP.STND
-		
10	Shaft type	10
G	Connections type	G - N - T - M - U - W - F
(VT)	Optional	(VT) Viton seals (optional) VLP-I (N) - VLP-E (N) Pressure relief valve (page A-49)

It is not necessary to indicate STANDARD flange

Conn Port Connections

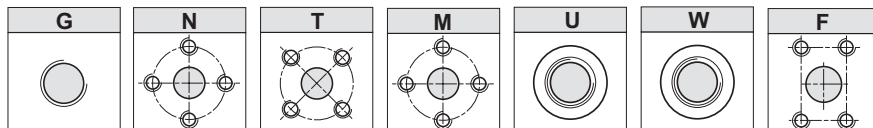

The sign on the body identifies the **suction side** for the pumps.



Rotation	
D	S

PUMPS GROUP 2 • SUPP.STND




Version to be chosen with axial and/or radial loads









Dimensions

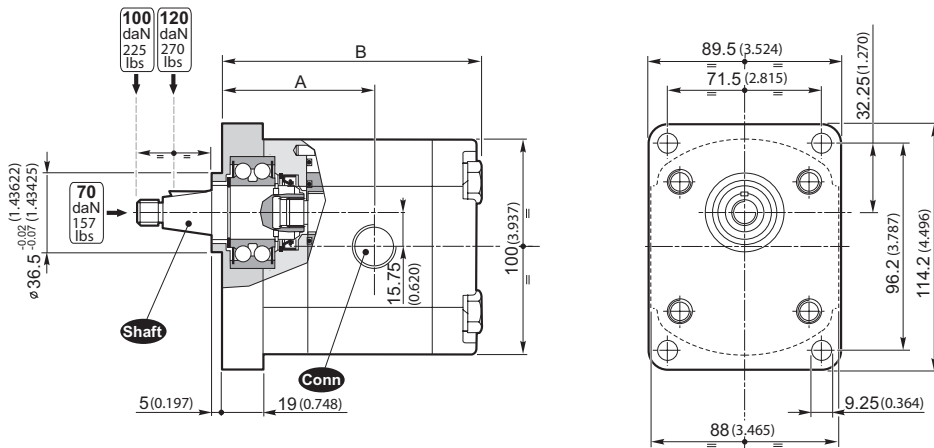

Shaft Available shafts




PUMPS GROUP 2 • PORT CONNECTIONS

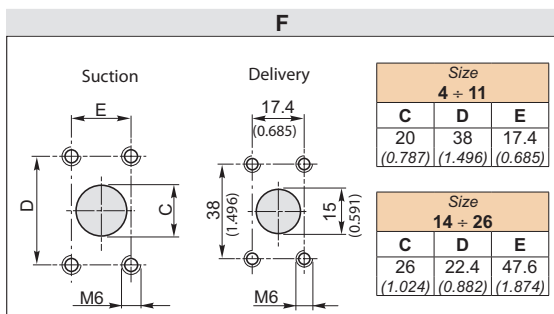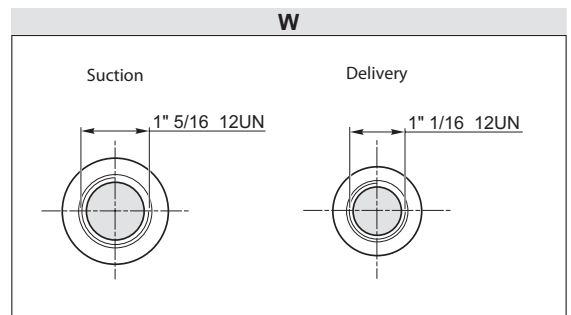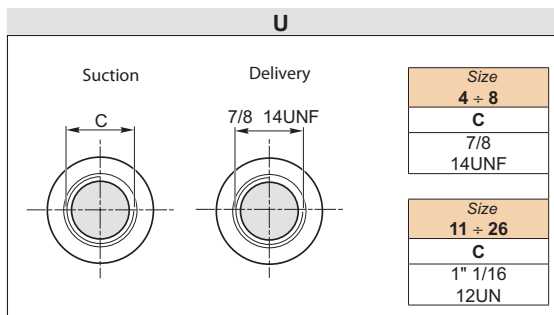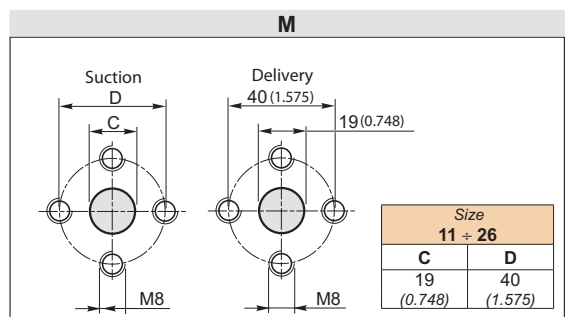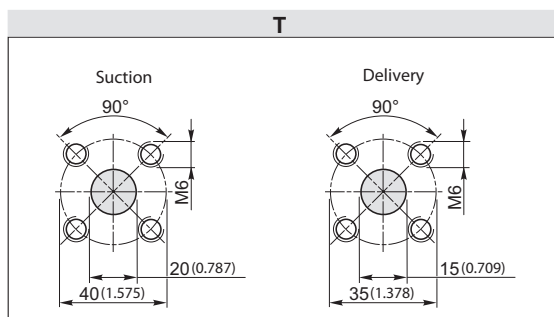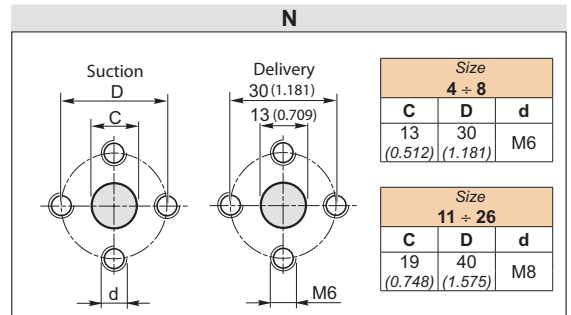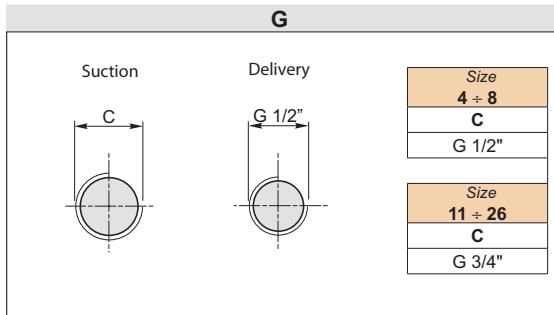

The sign on the body identifies the **suction side** for the pumps.

Port Connections position





Rotation	
D	S

PUMPS GROUP 2 • OPTIONAL




VLP- I (N)

Pressure relief valve with internal exhaust


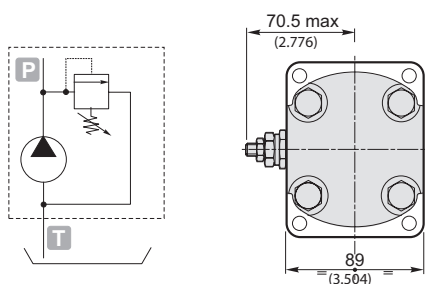


	A		
	Standard SAE A B50C	B80C	E52C
2SP A4	104.8 (4.126)	106.8 (4.205)	102.1 (4.020)
2SP A6	108.1 (4.256)	110.1 (4.335)	105.4 (4.150)
2SP A8	112.3 (4.421)	114.3 (4.500)	109.6 (4.315)
2SP A11	116.4 (4.583)	118.4 (4.661)	113.7 (4.476)
2SP A14	121.4 (4.780)	123.4 (4.858)	118.7 (4.673)
2SP A16	125.6 (4.945)	127.6 (5.024)	122.9 (4.839)
2SP A19	130.6 (5.142)	132.6 (5.220)	127.9 (5.035)
2SP A22	135.6 (5.339)	137.6 (5.417)	132.9 (5.232)
2SP A26	141.4 (5.567)	143.4 (5.646)	138.7 (5.461)



VLP- E (N)

Pressure relief valve with external exhaust

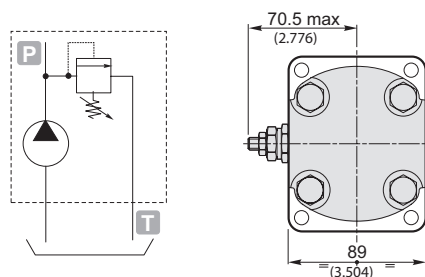

	A		
	Standard SAE A B50C	B80C	E52C
2SP A4	100.8 (3.969)	102.8 (4.047)	98.1 (3.862)
2SP A6	104.1 (4.098)	106.1 (4.177)	101.4 (3.992)
2SP A8	108.3 (4.264)	110.3 (4.343)	105.6 (4.157)
2SP A11	112.4 (4.425)	114.4 (4.504)	109.7 (4.319)
2SP A14	117.4 (4.622)	119.4 (4.701)	114.7 (4.516)
2SP A16	121.6 (4.787)	123.6 (4.866)	118.9 (4.681)
2SP A19	126.6 (4.984)	128.6 (5.063)	123.9 (4.878)
2SP A22	131.6 (5.181)	133.6 (5.260)	128.9 (5.075)
2SP A26	137.4 (5.409)	139.4 (5.488)	134.7 (5.303)

Warning.

Warning.
The pressure relief valve can be applied by substituting the rear cover.

It is supplied only with aluminium flange and cover.

The showed pumps are anticlockwise rotation.

The opening of the pressure relief valve should be carry out for times not over 10" each minute to avoid the overheating of the pump.

Example of ordering code

2SP	A	14	D	SAE A	-	10	G	(VT)	VLP-I	(N)
VLP-I	Cover with VLP						VLP-I (at internal exhaust)			
(N)	Spring type						VLP-E (at external exhaust)			
							B - N - R (See table)			

		Spring type		
		B	N	R
		white spring	black spring	red spring
Calibration fields*	[bar] (psi)	10 ÷ 100 (145 ÷ 1450)	30 ÷ 280 (435 ÷ 4060)	80 ÷ 380 (1160 ÷ 5510)



* Without setting request, it will be considered standard (black spring: 2175 psi).

PUMPS GROUP 2 • OPTIONAL





VRF

Priority flow divider valve



Exceeding flow to actuator or to tank

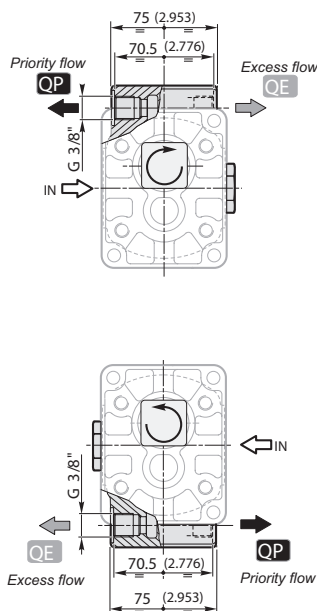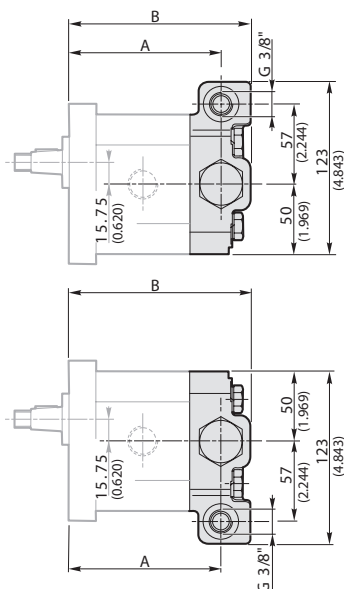

		2SP ... 4	2SP ... 6	2SP ... 8	2SP ... 11	2SP ... 14	2SP ... 16	2SP ... 19	2SP ... 22	2SP ... 26
A	Standard	91.8 (3.614)	95.1 (3.744)	99.3 (3.909)	103.4 (4.071)	108.4 (4.268)	112.6 (4.433)	117.6 (4.630)	122.6 (4.827)	128.4 (5.055)
	SAE AA	93.8 (3.693)	97.1 (3.823)	101.3 (3.988)	105.4 (4.150)	110.4 (4.346)	114.6 (4.512)	119.6 (4.709)	124.6 (4.906)	130.4 (5.134)
	E32 BX	89.1 (3.508)	92.4 (3.638)	92.4 (3.638)	100.7 (3.965)	105.7 (4.161)	109.9 (4.327)	114.9 (4.524)	119.9 (4.720)	125.7 (4.949)
	E32 CX	89.1 (3.508)	92.4 (3.638)	92.4 (3.638)	100.7 (3.965)	105.7 (4.161)	109.9 (4.327)	114.9 (4.524)	119.9 (4.720)	125.7 (4.949)
B	Standard	112.8 (4.441)	116.1 (4.571)	120.3 (4.736)	124.4 (4.898)	129.4 (5.094)	133.6 (5.260)	138.6 (5.457)	143.6 (5.654)	149.4 (5.882)
	SAE AA	114.8 (4.520)	118.1 (4.650)	122.3 (4.815)	126.4 (4.976)	131.4 (5.173)	135.6 (5.339)	140.6 (5.535)	145.6 (5.732)	151.4 (5.961)
	E32 BX	110.1 (4.335)	113.4 (4.465)	117.6 (4.630)	121.7 (4.791)	126.7 (4.988)	130.9 (5.154)	135.9 (5.350)	140.9 (5.547)	146.7 (5.776)
	E32 CX	110.1 (4.335)	113.4 (4.465)	117.6 (4.630)	121.7 (4.791)	126.7 (4.988)	130.9 (5.154)	135.9 (5.350)	140.9 (5.547)	146.7 (5.776)

Example of ordering code

2SP	A	14	D	SAE A	-	10	G	(VT)	VRF	(d)
VRF	Cover with V R F						VRF			
(d)	Diameter of calibrated orifice						2.5 - 3 - 3.25 - 4 - 4.25 - 5.5 (See table)			



d [mm]	Q [l/min] (US.gal/min)
2.5	5 (1.32)
3	7 (1.32)
3.25	8 (1.32)
4	11 (1.32)
4.25	14 (1.32)
5.5	21 (1.32)

PUMPS GROUP 2 • OPTIONAL





VRF - VLP-I

Priority flow divider valve and pressure relief valve



Exceeding flow to
actuator or to tank

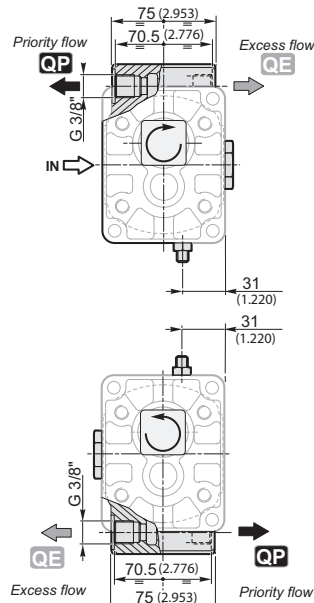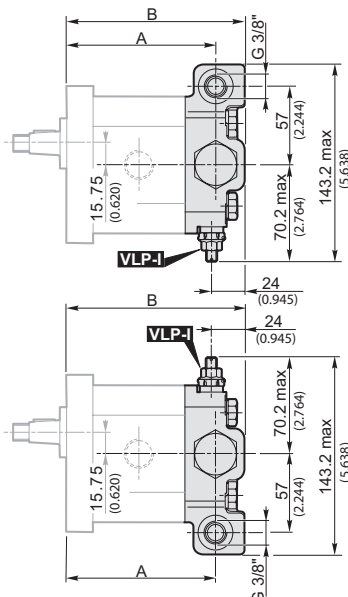

		2SP...4	2SP...6	2SP...8	2SP...11	2SP...14	2SP...16	2SP...19	2SP...22	2SP...26
A	Standard	91.8 (3.614)	95.1 (3.744)	99.3 (3.909)	103.4 (4.071)	108.4 (4.268)	112.6 (4.433)	117.6 (4.630)	122.6 (4.827)	128.4 (5.055)
	SAE AA	93.8 (3.693)	97.1 (3.823)	101.3 (3.988)	105.4 (4.150)	110.4 (4.346)	114.6 (4.512)	119.6 (4.709)	124.6 (4.906)	130.4 (5.134)
	E32 BX	89.1 (3.508)	92.4 (3.638)	92.4 (3.638)	100.7 (3.965)	105.7 (4.161)	109.9 (4.327)	114.9 (4.524)	119.9 (4.720)	125.7 (4.949)
	E32 CX	89.1 (3.508)	92.4 (3.638)	92.4 (3.638)	100.7 (3.965)	105.7 (4.161)	109.9 (4.327)	114.9 (4.524)	119.9 (4.720)	125.7 (4.949)
B	Standard	112.8 (4.441)	116.1 (4.571)	120.3 (4.736)	124.4 (4.898)	129.4 (5.094)	133.6 (5.260)	138.6 (5.457)	143.6 (5.654)	149.4 (5.882)
	SAE AA	114.8 (4.520)	118.1 (4.650)	122.3 (4.815)	126.4 (4.976)	131.4 (5.173)	135.6 (5.339)	140.6 (5.535)	145.6 (5.732)	151.4 (5.961)
	E32 BX	110.1 (4.335)	113.4 (4.465)	117.6 (4.630)	121.7 (4.791)	126.7 (4.988)	130.9 (5.154)	135.9 (5.350)	140.9 (5.547)	146.7 (5.776)
	E32 CX	110.1 (4.335)	113.4 (4.465)	117.6 (4.630)	121.7 (4.791)	126.7 (4.988)	130.9 (5.154)	135.9 (5.350)	140.9 (5.547)	146.7 (5.776)

Example of ordering code

2SP	A	14	D	SAE A	-	10	G	(VT)	VRF	(d)	-	VLP-I	(N)
VRF	Cover with VRF								VRF				
(d)	Diameter of calibrated orifice								2.5 - 3 - 3.25 - 4 - 4.25 - 5.5 (See table)				
VLP-I	Cover with VLP								VLP-I (at internal exhaust)				
(N)	Spring type								B - N - R (See table)				

		Spring type		
		B	N	R
		white spring	black spring	red spring
Calibration fields*	[bar] (psi)	10 ÷ 100 (145 ÷ 1450)	30 ÷ 280 (435 ÷ 4060)	80 ÷ 380 (1160 ÷ 5510)
The complete range can be obtained with additional thickness				

d	Q
[mm]	[l/min] (US gal/min)
2.5	5 (1.32)
3	7 (1.32)
3.25	8 (1.32)
4	11 (1.32)
4.25	14 (1.32)
5.5	21 (1.32)

* Without setting request, it will be considered standard (black spring: 2175 psi).