




OLEODINAMICA BORELLI
HYDRAULIC COMPONENTS

- **INNESTO ELETTROMAGNETICO 14daNm**
- **EMBRAYAGE ELECTROMAGNETIQUE 14daNm**
- **ELECTROMAGNETIC COUPLING 14daNm**
- **ELEKTROMAGNETISCHE SCHALKUPPLUNGEN 14daNm**






SERIE: 30929 12 Volt

SERIE: 30930 24 Volt

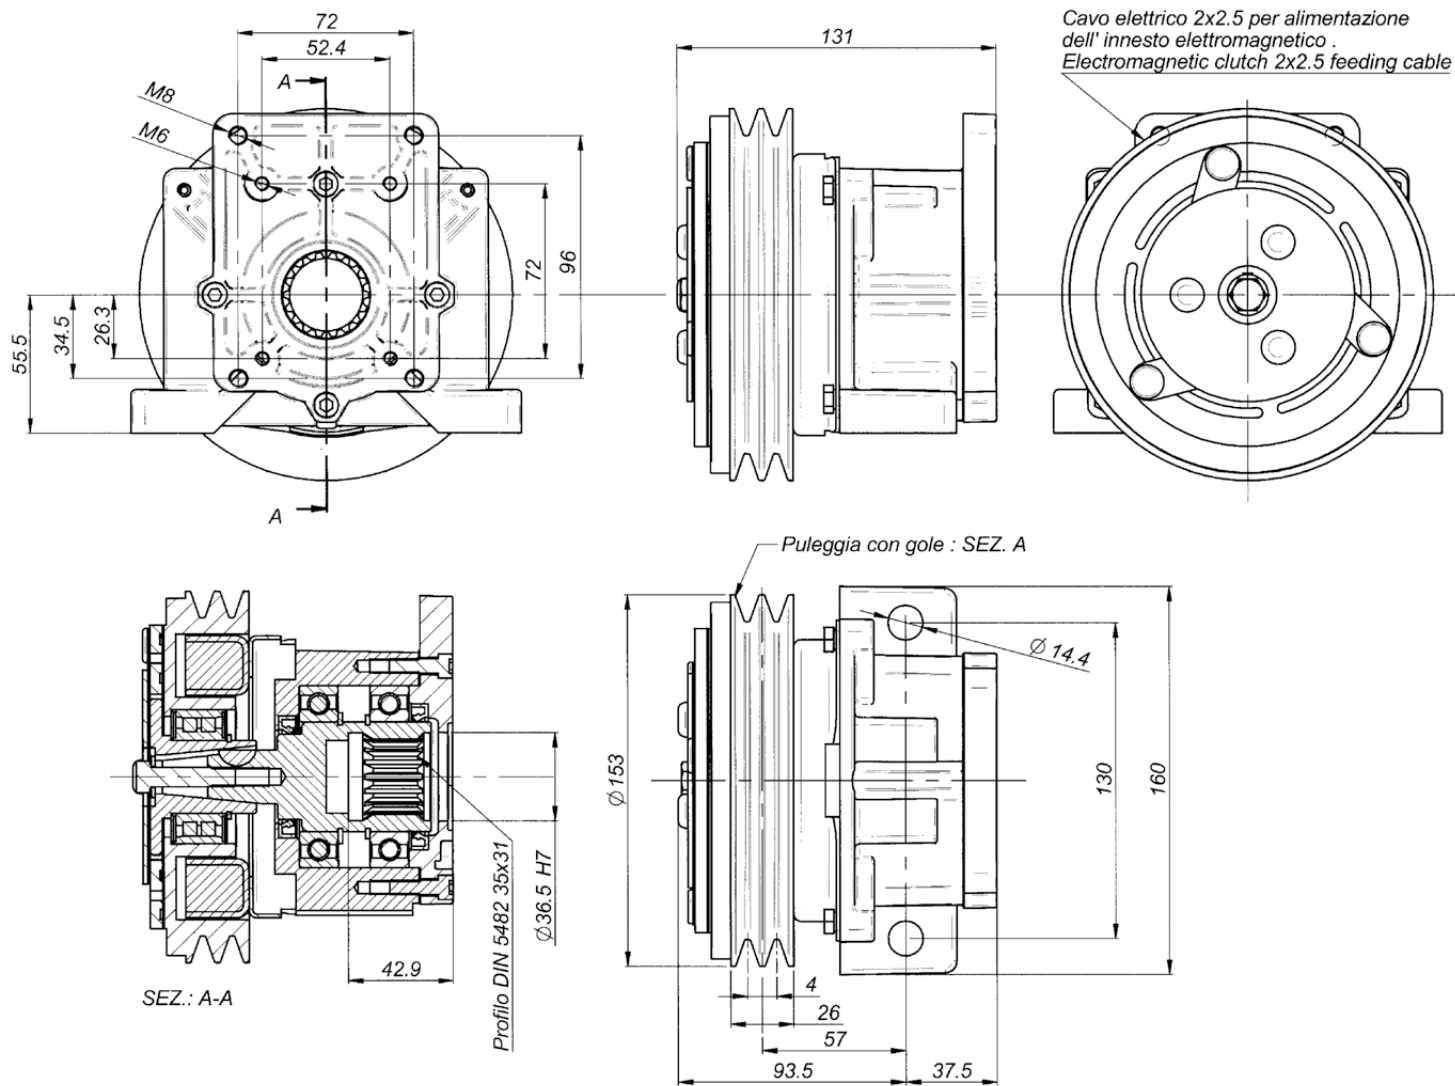

Nominal torque	11,8 daNm		Connection time		25 m/sec	
Static torque	14,0 daNm		Disconnection time		40 m/sec	
Dynamic torque	12,5 daNm	at 500 rpm	Minimum time between two connection		20 sec	
	11,0 daNm	at 1000 rpm				
	8,2 daNm	at 1500 rpm				
	7,5 daNm	at 2000 rpm				
	6,7 daNm	at 2500 rpm	Max speed		5000 rpm	
	6,5 daNm	at 3000 rpm	Weight		5,5 Kg	
Electric absorption	Resistance (Ω)		Current (A)		Power (W)	
	20° C	120° C	20° C	120° C	20° C	120° C
12 V DC	4,00	5,60	3,33	2,00	40,00	24,00
24 V DC	20,00	28,00	1,26	0,77	30,30	18,18
All technical data are at 20°C / at 120 °C the performance are less 20%						
All electromagneteic clutches are reversible.						

- FLANGE PER INNESTI ELETTROMAGNETICI 14 daNm
- BRIDE POUR EMBRAYAGES ELECTROMAGNETIQUE 14 daNm
- FLANGES FOR ELECTROMAGNETIC COUPLING 14 daNm
- FLANSCHEN FÜR ELEKTROMAGNETISCHE SCHALKUPPLUNGEN 14 daNm

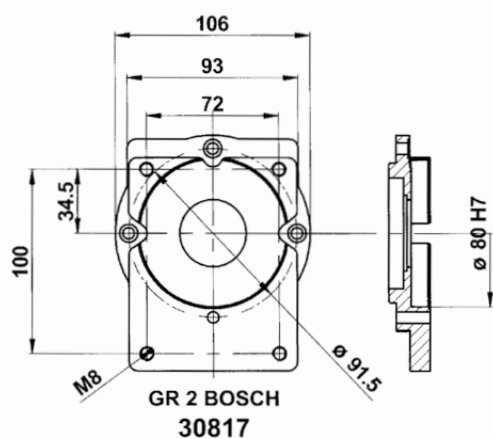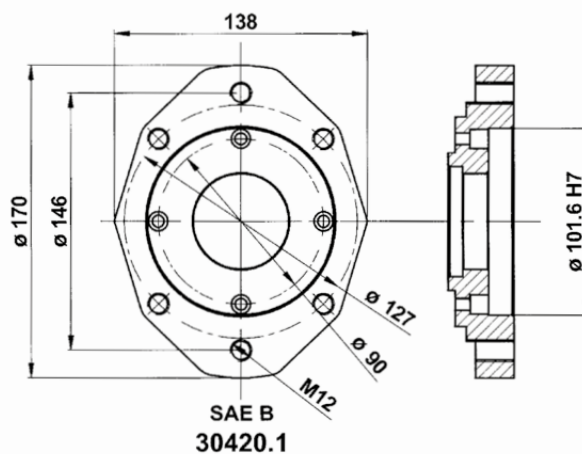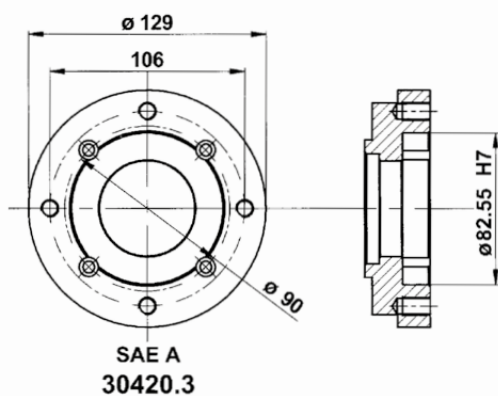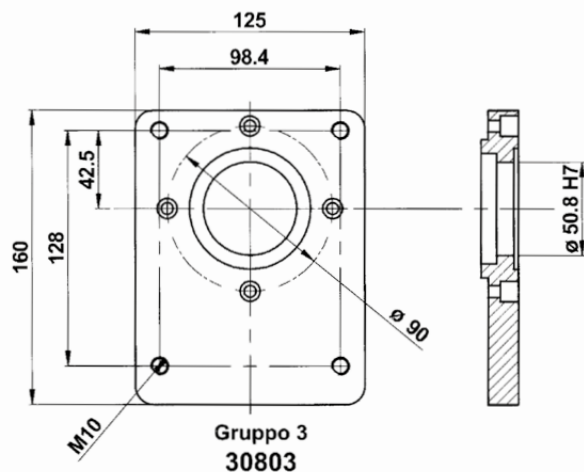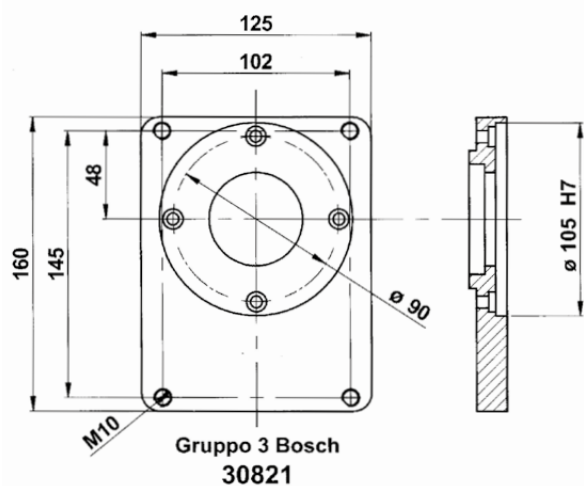

CODICE, CODE, CODE No., CODENUMMER					
Electric absorption	FLANGIA: TIPO, BRIDE: TYPE, FLANGE: TYPE, FLANSCHTYPE				
	Gr.2 BOSCH	Gr.3	Gr. 3 BOSCH	SAE A	SAE B
12 Volt	30980/2B	30982	30982/3B	30980/SA	30980/SB
24 Volt	30981/2B	30983	30982/3B	30981/SA	30981/SB




OLEODINAMICA BORELLI
HYDRAULIC COMPONENTS

- **INNESTO ELETTROMAGNETICO 14daNm PULEGGIA PLV**
- **EMBRAYAGE ELECTROMAGNETIQUE 14daNm POULIE PLV**
- **ELECTROMAGNETIC COUPLING 14daNm PLV PULLEY**
- **ELEKTROMAGNETISCHE SCHALTKUPPLUNGEN 14daNm PLV**

SERIE: 30929-1/7 12 Volt

SERIE: 30930-1/7 24 Volt






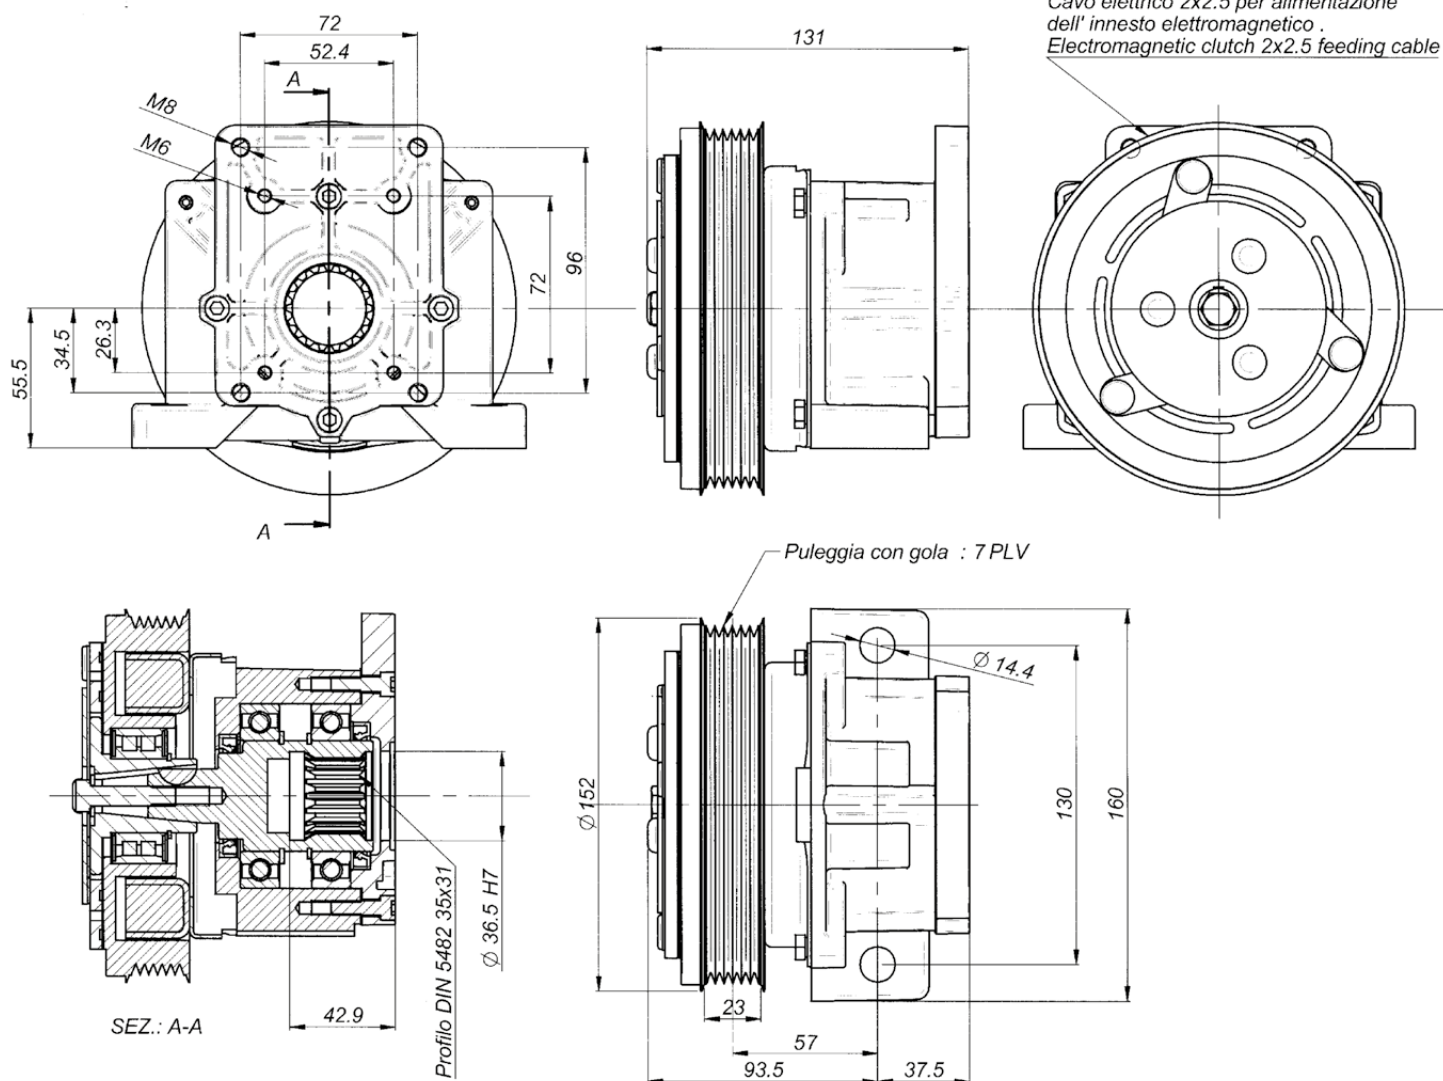


Nominal torque	11,8 daNm		Connection time	25 m/sec		
Static torque	14,0 daNm		Disconnection time	40 m/sec		
Dynamic torque	12,5 daNm	at 500 rpm	Minimun time between two connection	20 sec		
	11,0 daNm	at 1000 rpm				
	8,2 daNm	at 1500 rpm				
	7,5 daNm	at 2000 rpm				
	6,7 daNm	at 2500 rpm	Max speed	5000 rpm		
	6,5 daNm	at 3000 rpm	Weight	5,5 Kg		
Electric absorption	Resistance (Ω)		Current (A)		Power (W)	
	20° C	120° C	20° C	120° C	20° C	120° C
12 V DC	4,00	5,60	3,33	2,00	40,00	24,00
24 V DC	20,00	28,00	1,26	0,77	30,30	18,18
All technical data are at 20°C / at 120 °C the performance are less 20% All electromagneteic clutches are reversible.						



OLEODINAMICA **BORELLI**
HYDRAULIC COMPONENTS

- FLANGE PER INNESTI ELETTROMAGNETICI 14 daNm PLV
- BRIDE POUR EMBRAYAGES ELECTROMAGNETIQUE 14 daNm PLV
- FLANGES FOR ELECTROMAGNETIC COUPLING 14 daNm PLV
- FLANSCHEN FÜR ELEKTROMAGNETISCHE SCHALKUPPLUNGEN 14 daNm PLV

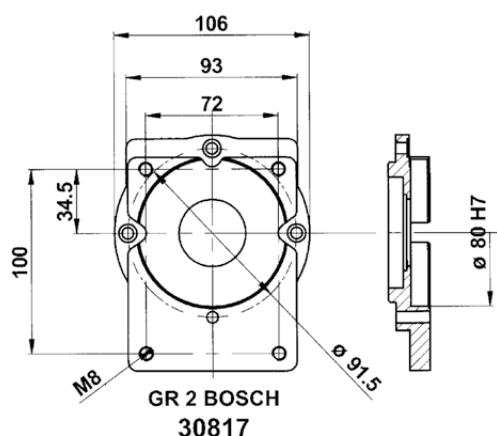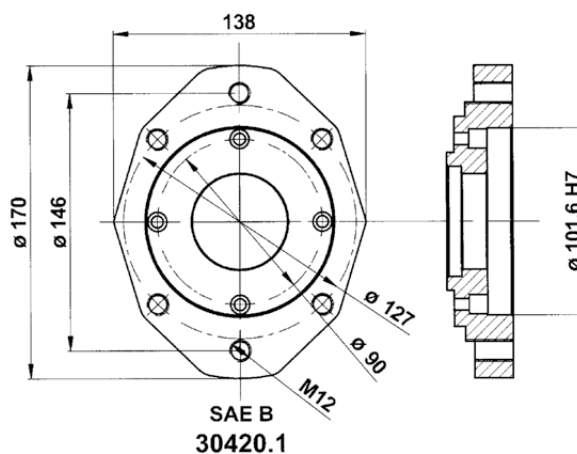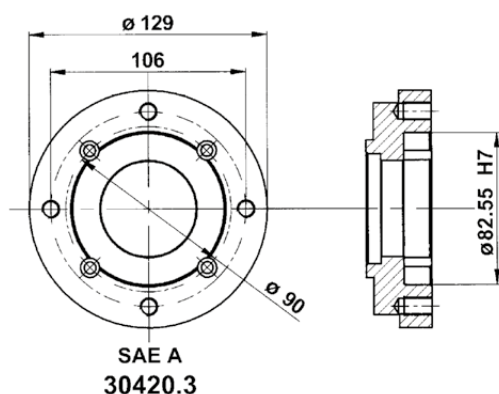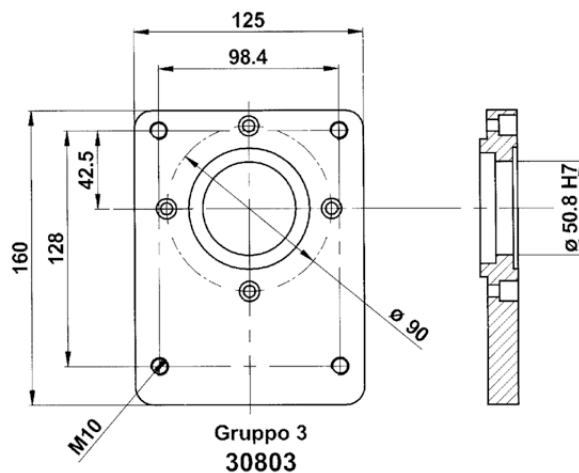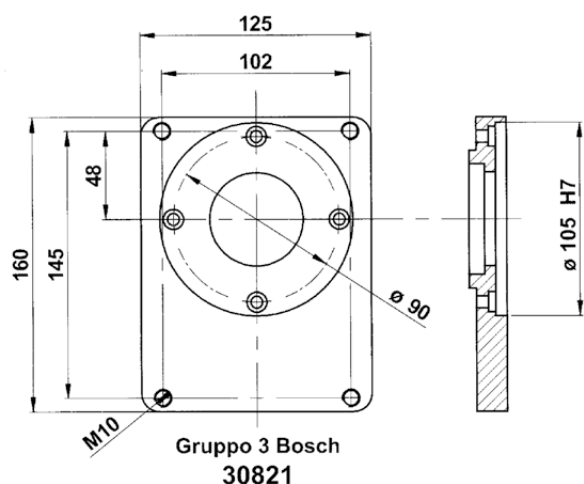

CODICE, CODE, CODE No., CODENUMMER					
Electric absorption	FLANGIA: TIPO, BRIDE: TYPE, FLANGE: TYPE, FLANSCHTYPE				
	Gr.2 BOSCH	Gr.3	Gr. 3 BOSCH	SAE A	SAE B
12 Volt	30929-1/2B	30931-1	30931-1/3B	30929-1/SA	30929-1/SB
24 Volt	30930-1/2B	30932-1	30932-1/3B	30930-1/SA	30930-1/SB