




- **INNESTO ELETTRIMAGNETICO 21daNm**
- **EMBRAYAGE ELECTROMAGNETIQUE 21daNm**
- **ELECTROMAGNETIC COUPLING 21daNm**
- **ELEKTROMAGNETISCHE SCHALKUPPLUNGEN 21daNm**

SERIE: 30990 12 Volt

SERIE: 30991 24 Volt






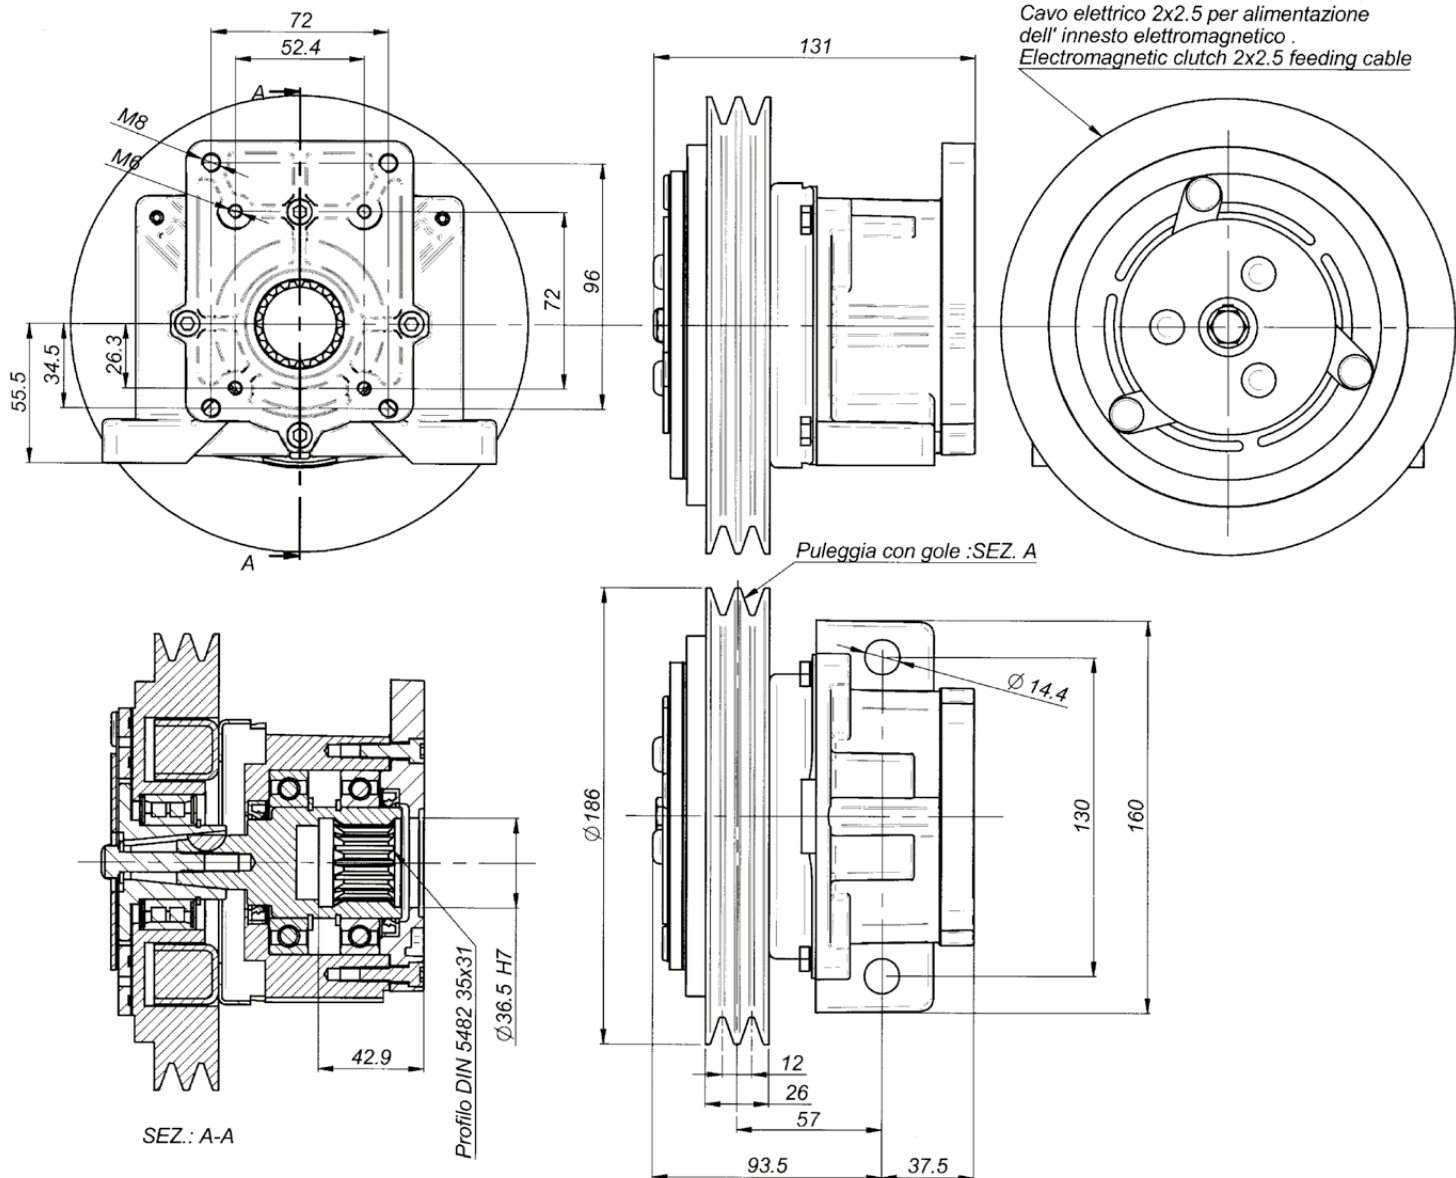


Nominal torque	16,0 daNm		Connection time	25 m/sec		
Static torque	21,0 daNm		Disconnection time	40 m/sec		
Dynamic torque	14,5 daNm	at 500 rpm	Minimum time between two connection	20 sec		
	12,0 daNm	at 1000 rpm				
	9,5 daNm	at 1500 rpm				
	8,8 daNm	at 2000 rpm				
	8,0 daNm	at 2500 rpm	Max speed	5000 rpm		
	7,8 daNm	at 3000 rpm	Weight	8 Kg		
Electric absorption	Resistance (Ω)		Current (A)		Power (W)	
	20° C	120° C	20° C	120° C	20° C	120° C
12 V DC	2,96	3,97	4,05	2,71	48,70	32,50
24 V DC	12,30	16,60	1,95	1,31	47,00	30,70
All technical data are at 20°C / at 120 °C the performance are less 20%						
All electromagneteic clutches are reversible.						



OLEODINAMICA **BORELLI**
HYDRAULIC COMPONENTS

- FLANGE PER INNESTI ELETTROMAGNETICI 21 daNm
- BRIDE POUR EMBRAYAGES ELECTROMAGNETIQUE 21 daNm
- FLANGES FOR ELECTROMAGNETIC COUPLING 21 daNm
- FLANSCHEN FÜR ELEKTROMAGNETISCHE SCHALKUPPLUNGEN 21 daNm

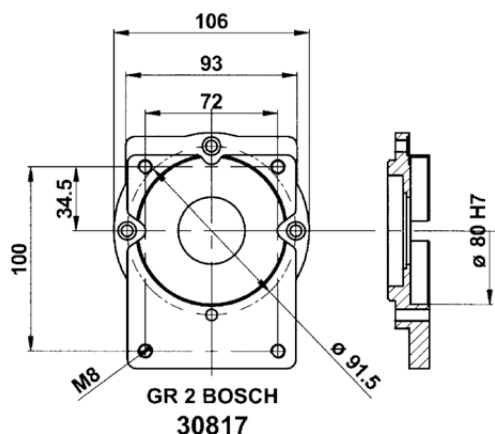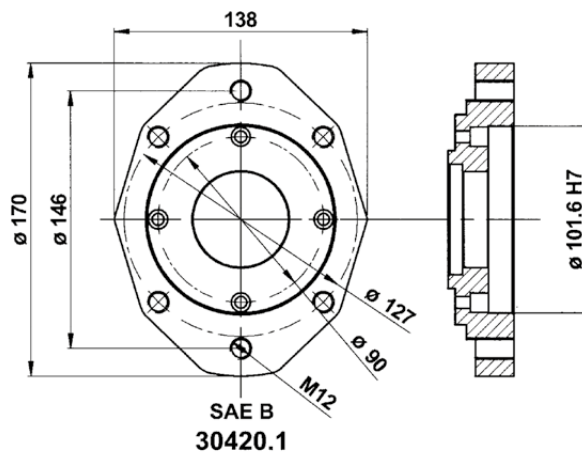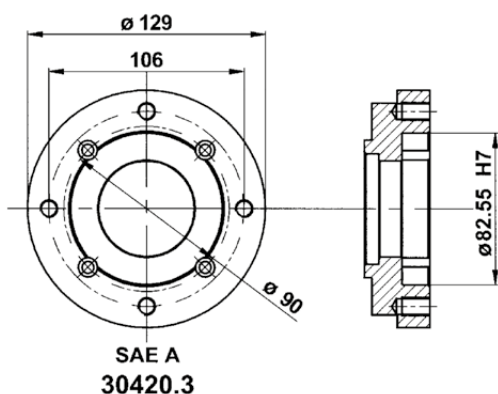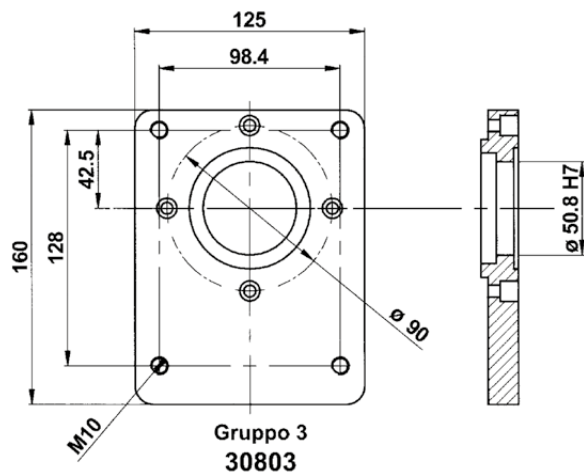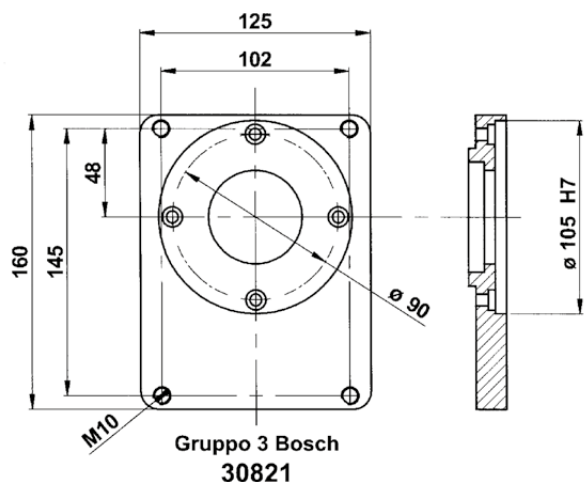

CODICE, CODE, CODE No., CODENUMMER					
Electric absorption	FLANGIA: TIPO, BRIDE: TYPE, FLANGE: TYPE, FLANSCHTYPE				
	Gr.2 BOSCH	Gr.3	Gr. 3 BOSCH	SAE A	SAE B
12 Volt	30990/2B	30992	30992/3B	30990/SA	30990/SB
24 Volt	30991/2B	30993	30993/3B	30991/SA	30991/SB