


HYDRAULIC STEEL TANKS

All products are manufactured from **sheet steel (S235JR UNI EN 10027-1)**.

An **anti-rust** and **anti-oil protective coating** is applied as standard, with **powder coating** available on request. Supplied in **RAL 9005**, on demand they and feature **pre-drilled holes**.

The stated **capacity** represents approximately **two-thirds** of the total volume. The **standard version** is supplied with a sheet thickness of **2 / 2.5 mm**.

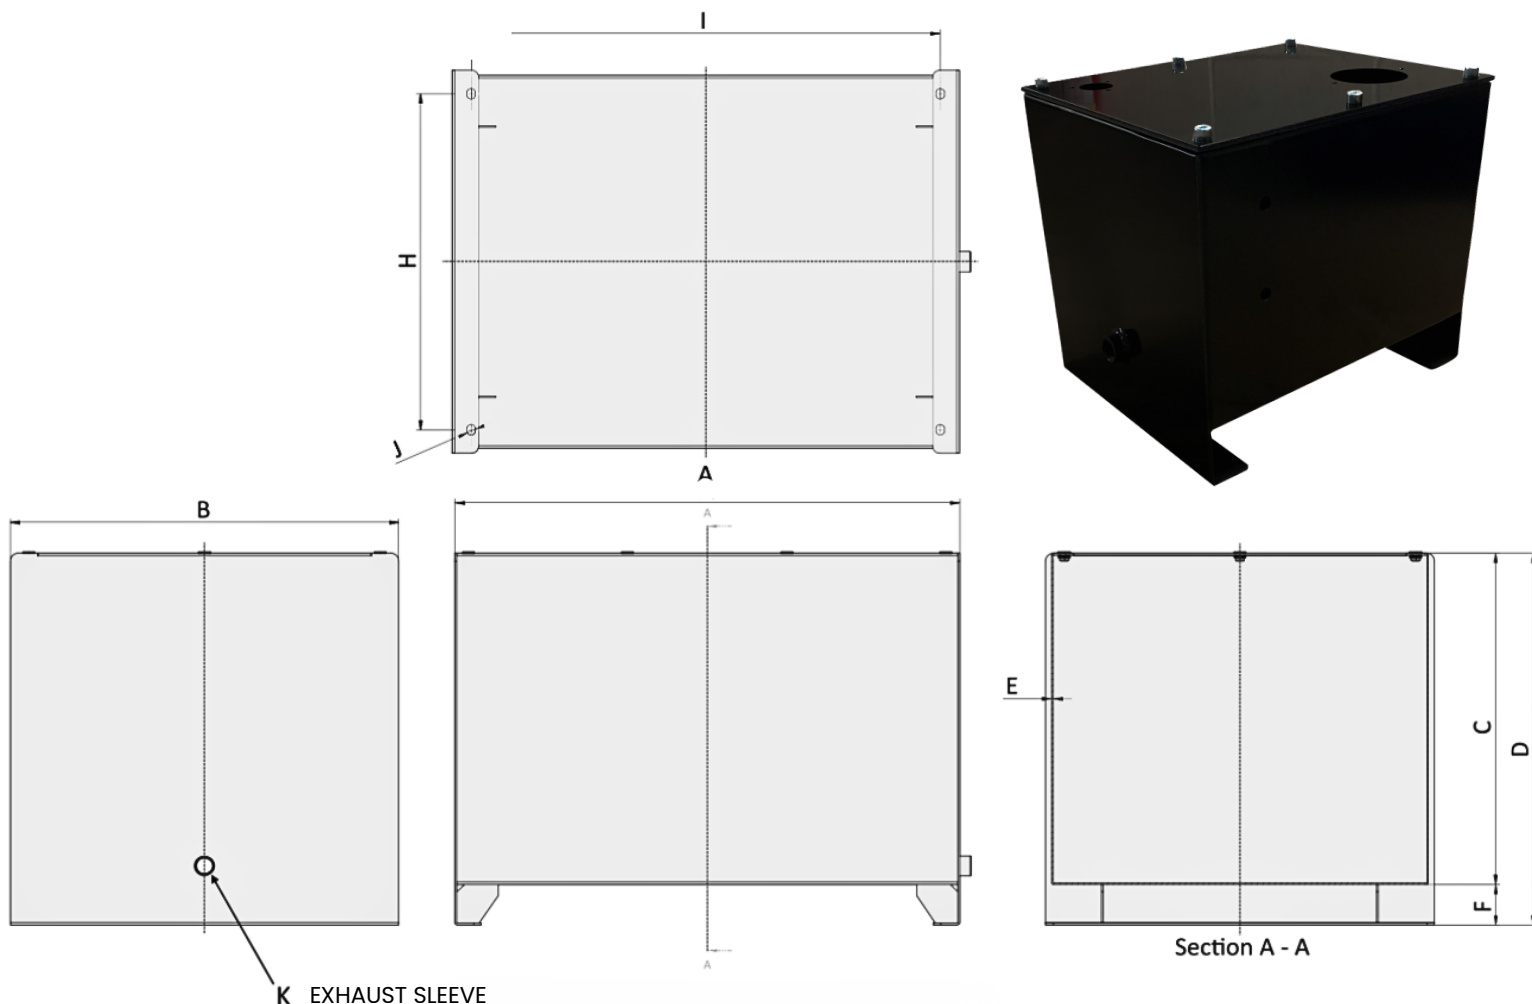

SKU	CAPACITY	A mm	B mm	C mm	D mm	E mm	F mm	H mm	I mm	J mm
HF12HL	14	335	270	235	290	2	55	207	285	11.5
HF16HL	22	410	325	250	305	2	55	270	365	11.5
HF30HL	39	470	375	280	335	2.5	55	313	428	11.5
HF55HL	58	600	470	310	365	2.5	55	400	548	11.5
HF75HL	75	600	470	400	455	2.5	55	400	548	11.5
HF100HL	100	675	520	450	505	2.5	55	456	625	11.5
HF180HL	165	805	620	500	555	2.5	55	555	754	11.5