
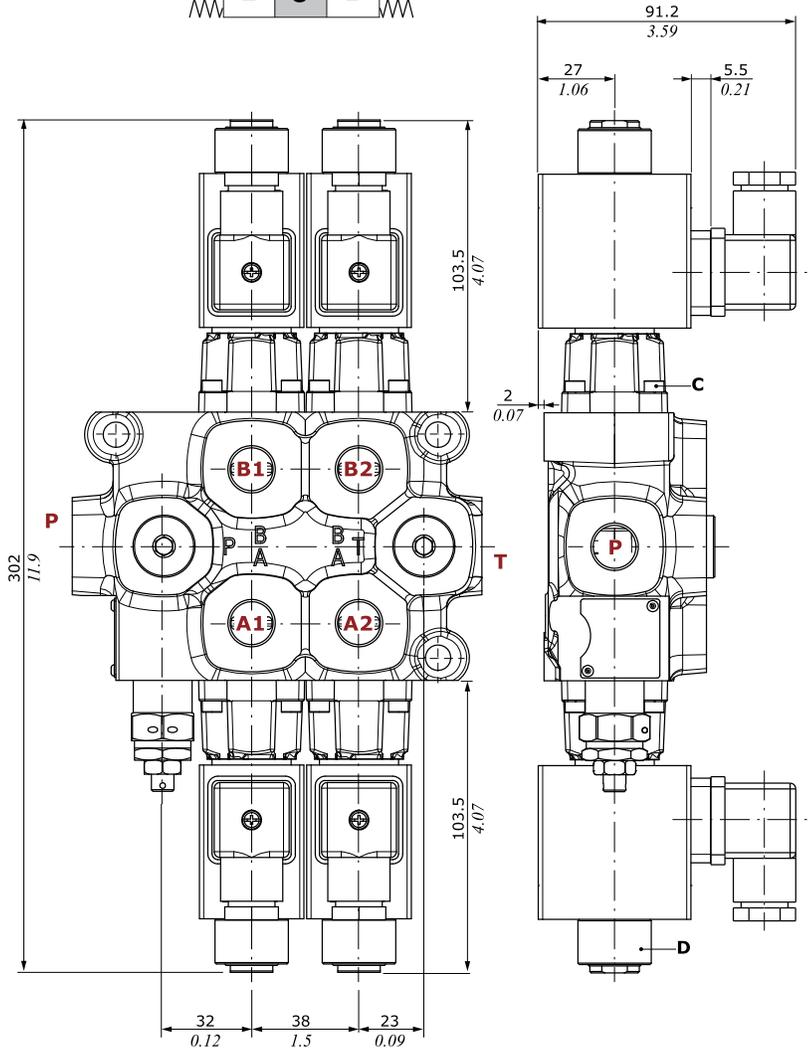


Direct solenoid control

D9 type: ON/OFF two side


Drawing is referred to a Q25 monoblock valve.



D9 coil	
Nominal voltage	12 VDC 24 VDC
Nominal voltage tolerance	±10%
Power rating	58 W
Insulance	Class H
Weather protection	IP65

Connector type: ISO4400 3P+T-PG11

Dynamic conditions

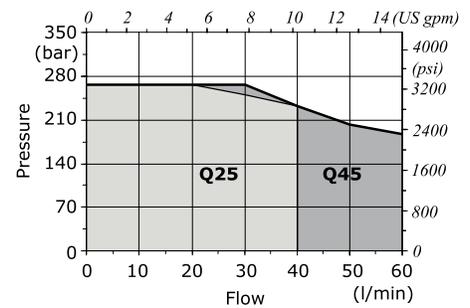

Wrenches and tightening torques

- C = allen wrench 3 - 3 Nm (2.2 lbf_t)
- D = manual tightening - 6.6 Nm (4.8 lbf_t)

