




G 3/4 DIN/ISO 228 BSP

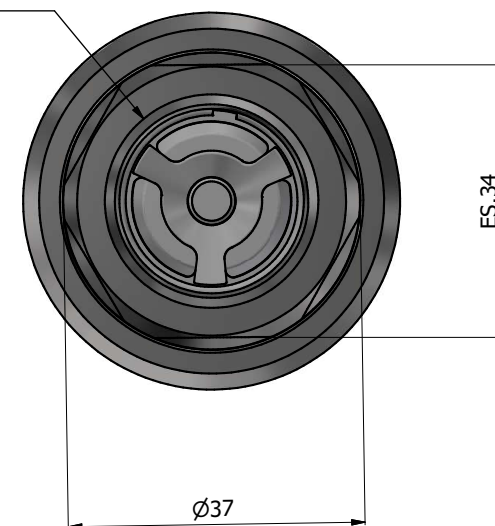

COUPLING TECHNICAL DATA:

- Dimensions and performances comply with requirements of ISO 7241-A
- No shut-off at flow rates up to 190 l/min with fluid ISO VG32 (in according to ISO 3448 standard)
- Maximum valve travel against stop: 0,5mm (in according to ISO 7241)
- Working temperature: -25°C/+125°C
- Maximum working pressure: 35 MPa
- Minimum burst test pressure (coupled and uncoupled): 100 MPa
- Test specifications according to ISO 18869 standard
- Endurance test: impulse test 350000 cycles
- Number of mechanical connections: 9000 operations
- Material: AVP (11SMnPb37).
- 12 Latching balls in Chromium steel hardened
- Seals: NBR 80-90 Shore A
- Back-up ring: PTFE
- Component N°2 treated for a greater durability
- Coating material **clear bright zinc**: up to 400 hours
- On request coating material **zinc-nickel**: up to 1000 hours

All of quick couplings are 100% tested after assembly with special machine in order to verify microleakage



00	PRIMA EMISSIONE	Facchinetti N.	Merisio I.	Patelli F.	01/07/2022
REV	DESCRIZIONE	AUTORE	CONTROLLATO	VERIFICATO	DATA

TOLLERANZA FILETTI THREAD TOLERANCE		MALE 6g - FEMALE 6H		 = QUOTA IMPORTANTE  = IMPORTANT QUOTE		GENERAL TOLERANCES Medium UNI EN 22768-1			
		RIPRODUZIONE VIETATA SALVO AUTORIZZAZIONE SCRITTA REPRODUCTION PROHIBITED UNLESS AUTHORIZED IN WRITING			PESO WEIGHT 0,568 kg	SCALA SCALE 1.5: 1	FOGLIO SHEET 1/2	REV. 00	
		SMUSSI NON QUOTATI 0,5X45°- RACCORDI NON QUOTATI R0.4mm UNLISTED CHAMFERS 0,5X45°- UNLISTED FITTINGS R0.4mm							
GEMELS S.p.A. 24069 - TRESORE BALNEARIO (BG) Via Gambirasio, 20/22 - ITALY Tel. +39-035-940445 Fax +39-035-945205 http://www.gemels.it		TRATTAMENTO SUPERFICIALE - SURFACE TREATMENT		CODICE GREZZO - RAW CODE			FORMATO - SIZE A3 		
		TRATTAMENTO TERMICO - HEAT TREATMENT		SOSTITUISCE IL - REPLACE					
		MATERIALE - MATERIAL		TRATTATO A - TREATED BY			DRAWN BY Facchinetti N.		DATE 16/02/2021
CODICE ARTICOLO - ITEM CODE NC12G040000		DESCRIZIONE ARTICOLO - ITEM DESCRIPTION QC PUSH PULL ISO 20 G3/4 FEMALE							