


Flexible / Medium Pressure PTFE LARGE THICKNESS HOSE

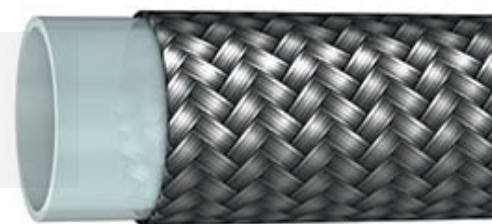

VINCKE PH-08

PTFE SAEJ517 SAE100R14										
Code	Nominalø		Inside ø	Outside ø	Max. Working Pressure		Burst Pressure	Minimum Bend Radius		Weight
Dash Size	inch	mm	mm	mm	bar	psi	bar	psi	mm	g/m
0802	03	1/8"	3,35	6,4	225	3263	900	13050	40	65
0803	04	3/16"	4,83	7,6	210	3045	840	12180	50	84
0804	05	1/4"	6,5	9,7	210	3045	840	12180	75	121
0805	06	5/16"	8	11,2	175	2537,5	700	10150	100	163
0806	07	3/8"	9,65	12,6	165	2393	660	9570	125	170
0808	10	1/2"	12,83	16,5	120	1740	480	6960	165	234
0810	12	5/8"	16	19,8	88	1276	352	5104	200	318
0812	16	3/4"	19,2	22,9	75	1087,5	300	4350	230	395
0816	18	1"	25,5	29,5	62	899	248	3596	300	528

Construction:

Internal core: tube of P.T.F.E, raw material: DUPONT

Reinforcement: Single braid of AISI 304 stainless steel wire, available AISI 316 - Double braided available for higher performance.

Temperature range: Continuous: -54°C to +260°C

