



U564AW40B3

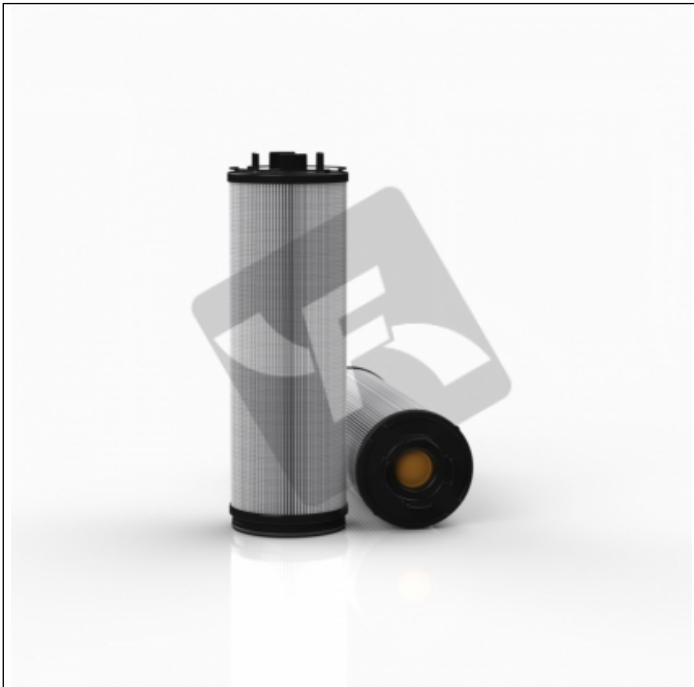

TECHNICAL INFO

Media type	FIBERGLASS + WATER REMOVAL
Efficiency	40 µm
Flow direction	OUT-IN
Collapse Δp	10 bar
Bypass setting	3.0 bar
Seals	NBR
Temperature range	5°C +100°C

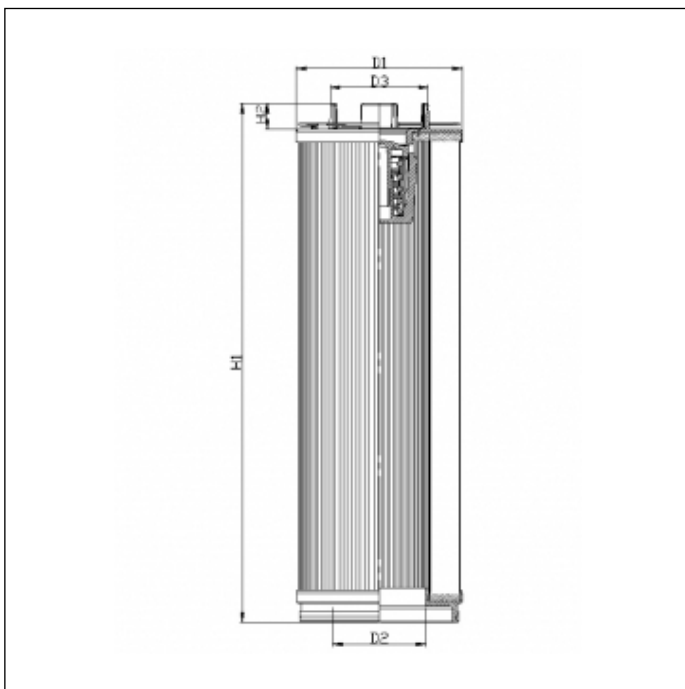

OVERALL DIMENSIONS

D1	153,0 mm
D2	86,0 mm
D3	90,5 mm
H1	916,0 mm
H2	23,5 mm