



DOUBLE ACTING OVERCENTER VALVES

VBCD
AISI 316 L

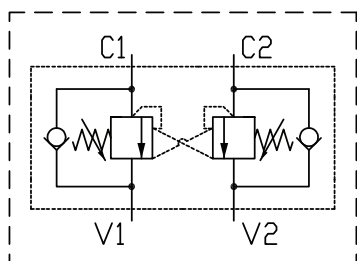


The double acting overcenter valves allow both the descent control of a load and the stop of a double acting cylinder. (distributor for open center)

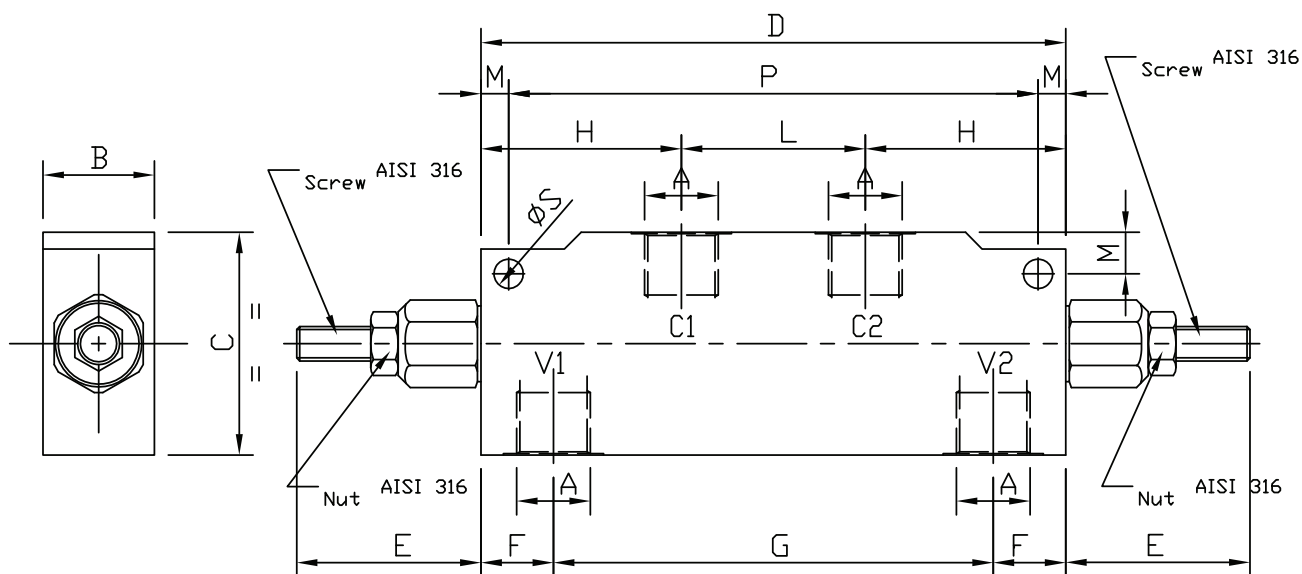


Code	A	Max pressure bar	Max flow l/min	Pilot Ratio	B	C	D	E	F	G	H	L	M	P	S
VBCD 140	BSPP 1/4	350	30	1:4.25	30	60	150	56	26	98	51	48	10	130	6.5
VBCD 380	BSPP 3/8	350	40	1:4.25	30	60	150	56	26	98	51	48	10	130	6.5
VBCD 120	BSPP 1/2	350	60	1:4.25	30	60	150	56	26	98	51	48	10	130	6.5

ORDERING CODE



BI.EFFE OLEODINAMICA

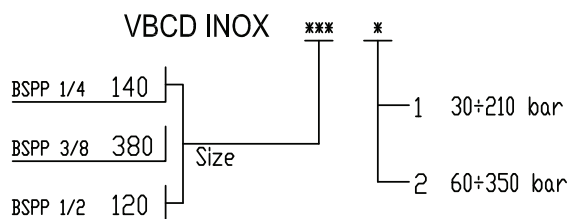

PRESSURE DROPS

