



DIN 2353 DOUBLE ACTING CHECK VALVES

VRDD
AISS 316 L



Double acting pilot check valves lock a double acting cylinder, allowing flow in one direction and blocked in opposite direction, until it is applied to the pilot pressure.



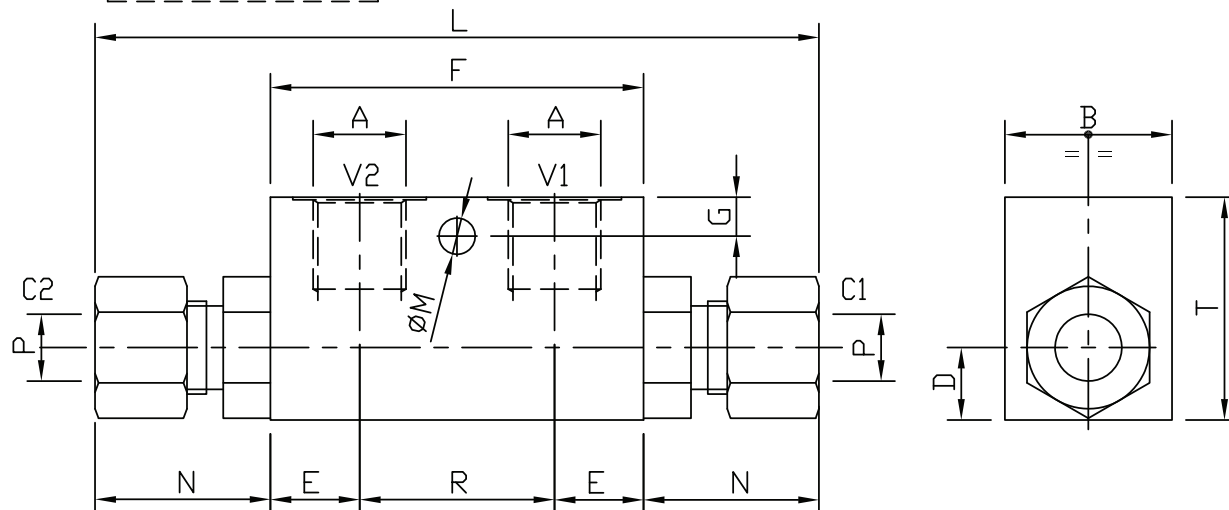


Code	A	Max flow l/min	Max pressure	B	D	E	F	G	L	M	N	R	T	Pilot Ratio	Pipe - ØP
VRDD 140	BSPP 1/4	15	320	30	14	17.5	63	8	123	5.5	30	28	40	1:4-1:9	12
VRDD 380	BSPP 3/8	35	320	30	13	16	67	7	128	7	30.5	35	40	1:4-1:9	12
VRDD 120	BSPP 1/2	45	320	35	16.5	23	80	15	155	6.5	37.5	34	50	1:4	15

PRESSURE DROPS

ORDERING CODE

VRDD INOX *** *			
BSPP 1/4	140	Dimensione Size	1 1 bar (standard) 6 6 bar
BSPP 3/8	380		
BSPP 1/2	120		



BI.EFFE OLEODINAMICA