



# DOUBLE ACTING PILOT CHECK VALVES

VRDE  
AISI 316 L





Double acting pilot check valves lock a double acting cylinder, allowing flow in one direction and blocked in opposite direction, until it is applied to the pilot pressure.

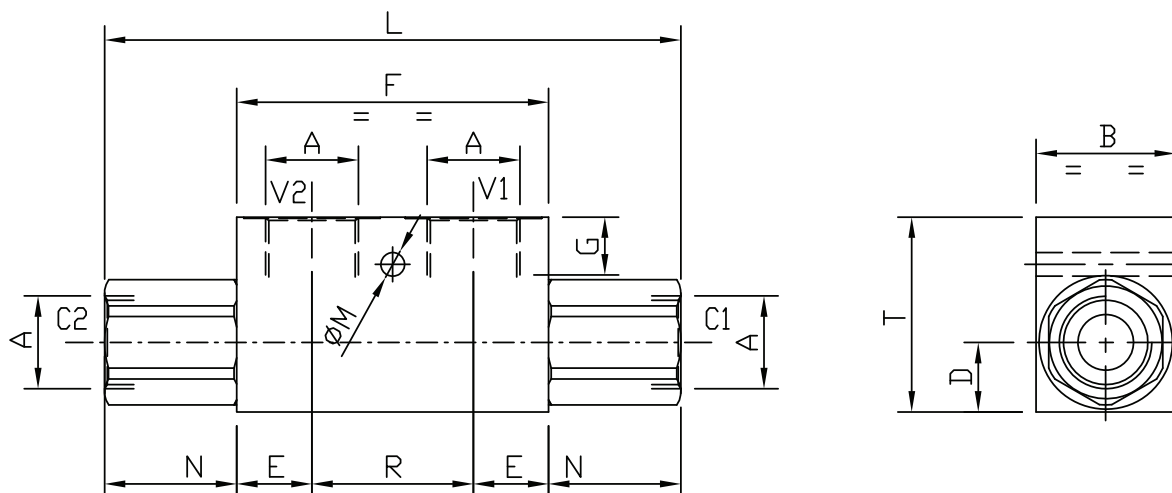


| Code     | A        | Max flow<br>l/min | Max pressure | B  | D    | E    | F  | G  | L   | M   | N    | R  | T  | Pilot Ratio |
|----------|----------|-------------------|--------------|----|------|------|----|----|-----|-----|------|----|----|-------------|
| VRDE 140 | BSPP 1/4 | 15                | 320 bar      | 30 | 14   | 17.5 | 63 | 8  | 106 | 5.5 | 21.5 | 26 | 40 | 1:4-1:9     |
| VRDE 380 | BSPP 3/8 | 35                | 320 bar      | 30 | 13   | 16   | 67 | 7  | 111 | 7   | 22   | 35 | 40 | 1:4-1:9     |
| VRDE 120 | BSPP 1/2 | 45                | 320 bar      | 35 | 16.5 | 23   | 80 | 15 | 144 | 6.5 | 32   | 34 | 50 | 1:4         |

## PRESSURE DROPS

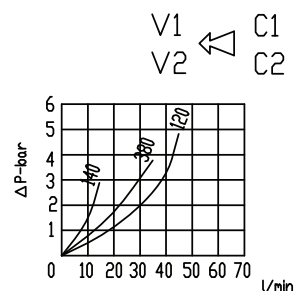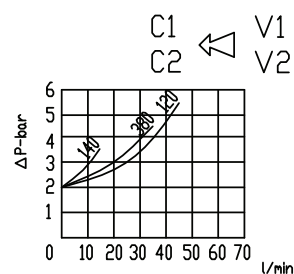

## ORDERING CODE



BI.EFFE OLEODINAMICA

