



SINGLE ACTING PILOT CHECK VALVES

VRPE
AISS 316 L




Single acting pilot check valve is used to lock the actuator in position in one direction only, allowing flow in one direction and blocked in opposite direction until it applies the pilot pressure.

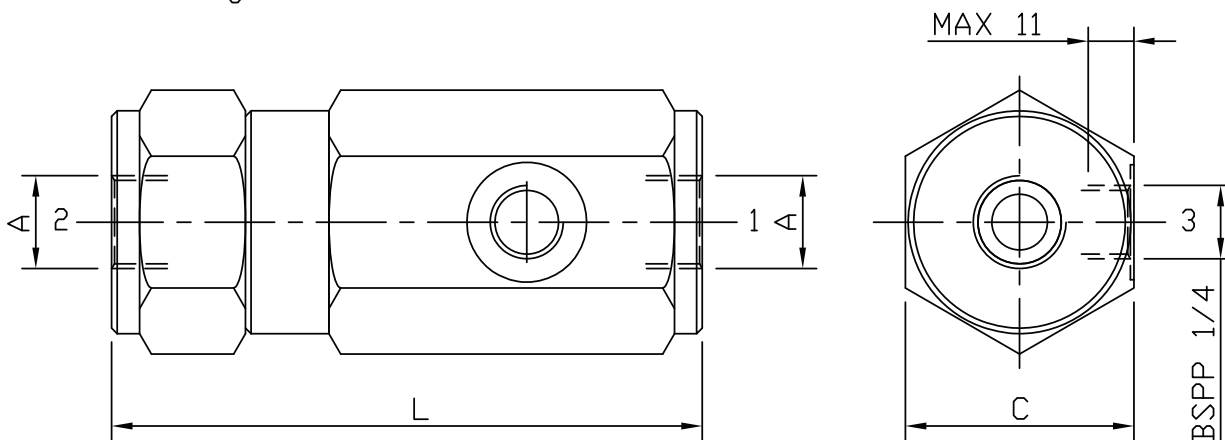


Code	A	Max flow l/min	Max pressure bar	L	C	Pilot Ratio	Opening pressure bar
VRPE 140	BSPP 1/4	25	350	96	36	1:5	0.5
VRPE 380	BSPP 3/8	40	350	106	41	1:4.4	0.5
VRPE 120	BSPP 1/2	60	350	122	41	1:4.2	0.5
VRPE 340	BSPP 3/4	90	350	130	55	1:4	0.5

ORDERING CODE

PRESSURE DROPS

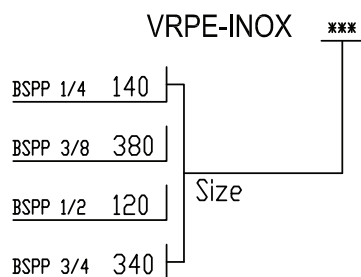

opening pressure 0.5 bar



BI.EFFE OLEODINAMICA

