
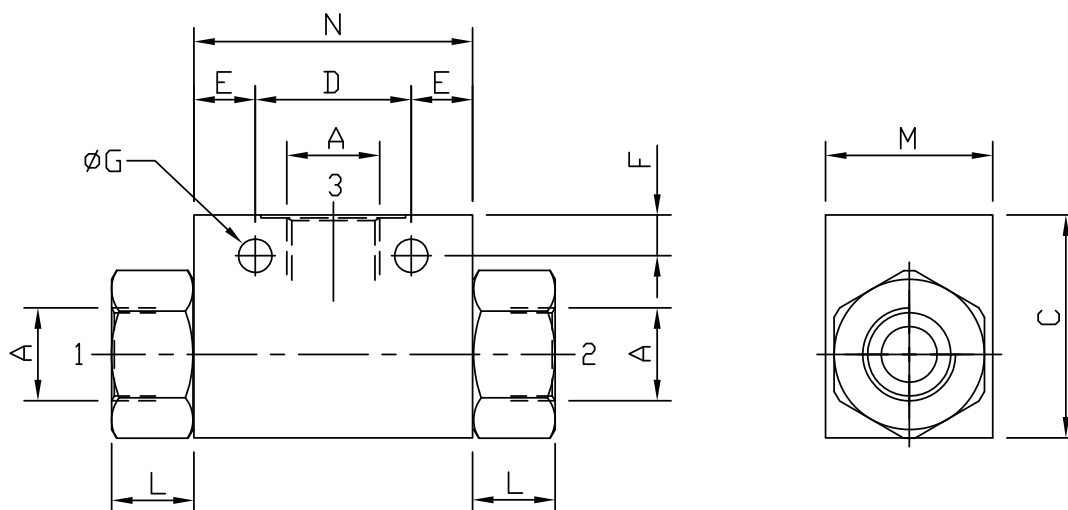


LOAD SHUTTLE-BALL TYPE VALVES

VUSF
AISI 316 L

VUSF load shuttle ball valves are employed when two pressures lines converge inside the valve in the same time (the lower pressure line locks) or separately.







Code	A	Max flow l/min	Max pressure	C	D	E	F	G	L	M	N
VUSF140	BSPP 1/4	20	450	40	28	11	7.3	6	15	30	50
VUSF380	BSPP 3/8	40	450	40	28	11	7.3	6	12	30	50
VUSF120	BSPP 1/2	60	450	50	36	10.75	9	6	18	35	57.5

ORDERING CODE

VUSF INOX ***	
BSPP 1/4 140	Size
BSPP 3/8 380	
BSPP 1/2 120	

PRESSURE DROPS

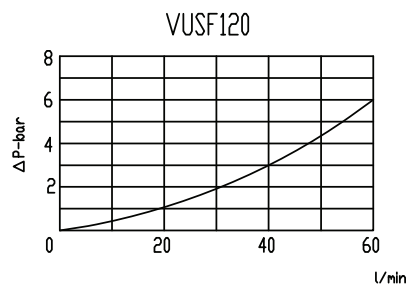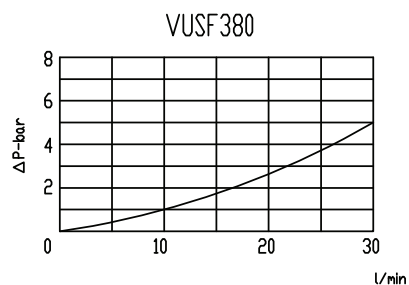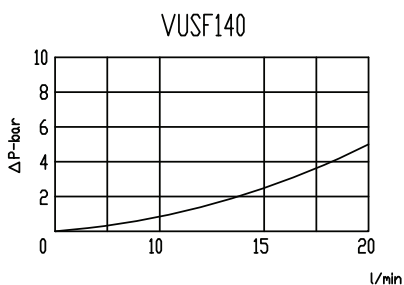

BI.EFFE OLEODINAMICA